





T12

(Battery)

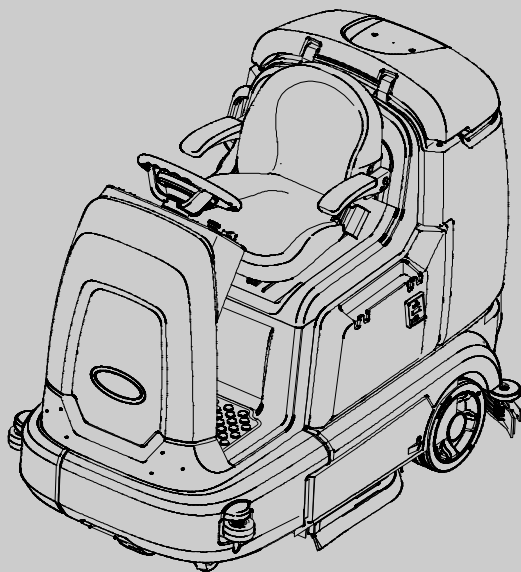

Rider Scrubber Parts Manual

Machine Serial Number Range
(S/N 10000000–19999999)



The Safe Scrubbing Alternative®
TennantTrue® Parts
IRIS® a Tennant Technology
Insta-Fit™ Adapter



North America / International



For the latest parts manuals and other
language Operator manuals, visit:

www.tennantco.com/manuals

9009916

Rev. 14 (02-2023)



Ref	Part No.	Serial Number	Description	Qty.
1	82681	(100000000–19999999	) Bracket Wldt, Lpg Mount	1
2	63810	(100000000–19999999	) Latch Assy, Lpg Tank Mtg, W/Nut	4
3	51839	(100000000–19999999	) Nut Adjustable, Lpg Tank Mtg	2
4	49263	(100000000–19999999	) Tie, Cable	3
5	82556	(100000000–10001364	) Bracket, Vaporizer	1
6	54930	(100001567–19999999	) Vaporizer, LPG	1

EN	HOW TO ORDER PARTS – See diagram above Only use TENNANT Company supplied or equivalent parts. Parts and supplies may be ordered online, by phone, by fax or by mail. Follow the steps below to ensure prompt delivery. 1. (A) Identify the machine model. 2. (B) Identify the machine serial number from the data plate. 3. (C) Ensure the proper serial number is used from the parts list. 4. Identify the part number and quantity. Do not order by page or reference numbers. 5. Provide your name, company name, customer ID number, billing and shipping address, phone number and purchase order number. 6. Provide detail shipping instructions.	Please fill out at time of installation for future reference. Model No. – _____ Serial No. – _____ Machine Options – _____ Sales Rep. – _____ Sales Rep. phone no. – _____ Customer ID Number – _____ Installation Date – _____
	(D) ▽ – Identifies an assembly ▲ – Identifies parts included in assembly	

Tennant Company
10400 Clean Street
Eden Prairie, MN 55344-2650
Phone: (800) 553-8033
www.tennantco.com

Touch-N-Go, 1-STEP, Grip-N-Go, Dura-Track, SmartRelease, Duramer, Insta-Fit are trademarks of Tennant Company.

Flow-Rite is a registered trademark of Flow-rite Controls.

Specifications and parts are subject to change without notice.

Copyright © 2013 – 2019, 2022, 2023 TENNANT Company, Printed in U.S.A.

CN	如何订购部件 – 参见下表 仅使用 TENNANT 公司提供的或同等部件。部件和供应可以在线订购，通过电话、传真或邮件订购。 请遵循下面的步骤确保及时交付。 1. (A) 确定机器型号。 2. (B) 从数据标签确定机器序列号。 3. (C) 确保使用部件列表中的正确序列号。 4. 确定部件号和数量。 不要按页面或参考编号订购。 5. 提供您的姓名、公司名称、客户 ID 号、付帐和送货地址、电话号码和采购单编号。 6. 提供详细的送货说明。 (D) ▽ – 确定组件 ▲ – 确定组件中包含的组件	请在安装时填写供未来参考。 型号 – _____ 序列号 – _____ 机器选项 – _____ 销售代表 – _____ 销售代表电话号码 – _____ 客户 ID 编号 – _____ 安装日期 – _____
----	--	--

ES	CÓMO SOLICITAR PIEZAS – Consulte el diagrama anterior. Utilice sólo las piezas suministradas por TENNANT Company o piezas equivalentes. Puede solicitar las piezas a través de internet, por teléfono, por fax o por correo. Siga los siguientes pasos para que la entrega sea rápida. 1. (A) Indique el modelo de máquina. 2. (B) Indique el número de serie de la etiqueta de datos. 3. (C) Asegúrese de que indica el número de serie correcto de la lista de piezas. 4. Indique la cantidad y el número de la pieza. No realice el pedido indicando el número de página o el de referencia. 5. Incluya su nombre, el nombre de la empresa, el ID de cliente, las direcciones de envío y facturación, el número de teléfono y el número del pedido de compra. 6. Facilite instrucciones de envío. (D) ▽ – identifica un conjunto ▲ – identifica piezas de un conjunto	Rellene estos datos cuando realice la instalación para utilizarlos como referencia en el futuro. Nº modelo – _____ Nº serie – _____ Opciones de la máquina – _____ Vendedor – _____ Nº teléfono vendedor – _____ Nº cliente – _____ Fecha de instalación – _____
----	--	---

FR	COMMENT COMMANDER DES PIÈCES DÉTACHÉES – Voir le schéma ci-dessus. Utilisez uniquement des pièces fournies par la société TENNANT ou équivalentes. Les pièces et fournitures peuvent être commandées en ligne, par téléphone, fax, ou par courrier. Suivez les étapes ci-dessous pour assurer une livraison rapide. 1. (A) Identifiez le modèle de la machine. 2. (B) Identifiez le numéro de série de la machine, à partir de l'étiquette signalétique. 3. (C) Assurez-vous que le numéro de série correct est utilisé à partir de la liste de pièces détachées. 4. Identifiez le numéro de pièce et la quantité. Ne commandez pas par page ou numéros de référence. 5. Fournissez votre nom, le nom de votre société, votre numéro d'identification de client, l'adresse de facturation et d'expédition, le numéro de téléphone et le numéro du bon de commande. 6. Fournissez des instructions d'expédition détaillées. (D) ▽ – identifie un assemblage ▲ – identifie les pièces composant l'assemblage	A remplir au moment de l'installation à titre de référence. Nº du modèle – _____ Nº de série – _____ Options de la machine – _____ Agent commercial – _____ Nº tél. de l'agent commercial – _____ Numéro d'identification client – _____ Date d'installation – _____
----	--	---

JP	パーツの発注方法 ? 上記の図を参照してください TENNANT社製のパーツまたは同等品のみをお使いください。 パーツやサプライ品のご注文は、オンライン、電話、FAX、または手紙でお願いいたします。 確実にお届けできるように、以下の情報お知らせください。 1. (A) 製品のモデル名をお知らせください。 2. (B) 製品のデータラベルに印刷されているシリアル番号をお知らせください。 3. (C) パーツリストを参照して、シリアル番号が正しいかご確認ください。 4. パーツ番号と数量をお知らせください。マニュアル/カタログのページ番号や参照番号でのご注文はご遠慮ください。 5. お客様のお名前、会社名、顧客ID番号、請求/発送先住所、電話番号、注文書番号をお知らせください。 6. 発送に関するご希望があれば、明記してください。 (D) ▽ – アセンブリを示します ▲ – アセンブリに含まれるパーツを示します	後日確認できるように、設置時に記入してください。 モデルNo. – _____ シリアルNo. – _____ 製品のオプション – _____ 販売代理店 – _____ 販売代理店の電話番号 – _____ 顧客ID番号 – _____ 設置日 – _____
----	---	---

GENERAL RECOMMENDED MAINTENANCE







General Recommended Maintenance Items

Ref.	Part No.	Serial Number	Description	Qty.
	1200430	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Linatex	2
	1202159	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Ure	2
	1202160	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Gum	2
	1200383	(10000000-19999999)	Blade, Sqge, Front, 42.59l [Linard]	1
	1200384	(10000000-19999999)	Blade, Sqge, Rear, 44.96l Linatex	1
	1201825	(10000000-19999999)	Blade, Sqge, Front, 42.59l [Gum]	1
	1201823	(10000000-19999999)	Blade, Sqge, Front, 42.59l [Urethane]	1
	1201826	(10000000-19999999)	Blade, Sqge, Rear, 44.96l Gum	1
	1201824	(10000000-19999999)	Blade, Sqge, Rear, 44.96l Urethane	1
	1054100	(10000000-19999999)	Wheel, 04.0d 2.56w 0.41b	2
	363162	(10000000-19999999)	Wheel, 04.0d 0.89w 0.64b	2
	1205850	(10000000-19999999)	Caster Assy, Swivel	2
	222280	(10000000-19999999)	Battery, Wet, 06vdc 0240ah	6
	1070587	(10000000-19999999)	Battery, Wet, 06vdc 0360ah	6
▽	9010935	(10000000-19999999)	Tool, Belt, Cyl Head, Afmkt [T12] (Cylindrical Scrub Head)	1
▲	1200334	(10000000-19999999)	Belt, Drive, 7 Grv	2
▲	1203758	(10000000-19999999)	Tool, Installation, Belt	1
	1201053	(10000000-19999999)	Skirt, Rbr, Front, Disc (Disc Scrub Head)	1
	1201185	(10000000-19999999)	Strip, Skirt, Rear, Disc (Disc Scrub Head)	1
	361144	(10000000-19999999)	Key, Ignition, Sgl	1
	16411	(10000000-19999999)	Off Whites/G Acrylic12.8oz[Acm101-00171]	1
	16412	(10000000-19999999)	Teal Blue S/G Enamel12.8oz[lcm101-70266]	1
	377540	(10000000-19999999)	Paint, Airdry, Blk, 12oz	1
	377538	(10000000-19999999)	Paint, Airdry, Gray, 12oz [Enamel]	1
	377537	(10000000-19999999)	Iron Gray S/G Enamel12.8oz[lcm101-00517]	1

SECTION 2

Contents	Page
Fig. 1 – Replacement Brushes, Scrub Head	2-2
Fig. 2 – Replacement Brushes, Side Brush	2-4
Fig. 3 – Main Frame and Wheels Group	2-6
Fig. 4 – Front Bumper and Side Door Group	2-8
Fig. 5 – Seat Support Group	2-10
Fig. 6 – Seat Group, Standard	2-12
Fig. 7 – Seat Kit, Deluxe	2-14
Fig. 8 – Steering and Instrument Panel Group, T12	2-16
Fig. 9 – Steering and Instrument Panel Group, T12XP	2-18
Fig. 10 – Front Cover and Directional Pedal Group	2-20
Fig. 11 – Scrub Head Lift Group	2-22
Fig. 12 – Scrub Head and Drive Motor Group, Disk	2-24
Fig. 13 – Scrub Head Frame Group, Cylindrical	2-26
Fig. 14 – Scrub Head Drive Motor Group, Cylindrical	2-28
Fig. 15 – Scrub Head Side Squeegee Group, Right Hand	2-30
Fig. 16 – Scrub Head Side Squeegee Group, Left Hand	2-32
Fig. 17 – Recovery Tank Group	2-34
Fig. 18 – Vacuum Fan Group	2-36
Fig. 19 – Solution Tank Group	2-38
Fig. 20 – Rear Squeegee Lift Group	2-40
Fig. 21 – Rear Squeegee Kit	2-42
Fig. 22 – Electrical Circuit Board Group	2-44
Fig. 23 – Electrical Contactor and Wires Group	2-46
Fig. 24 – Battery Group, 240Ah	2-48
Fig. 25 – Electrical Schematic Group (S/N 10000000–10863997)	2-50
Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)	2-54
Fig. 27 – Wire Harnesses Group	2-60
Fig. 28 – Labels Group	2-70

Fig. 1 – Replacement Brushes, Scrub Head

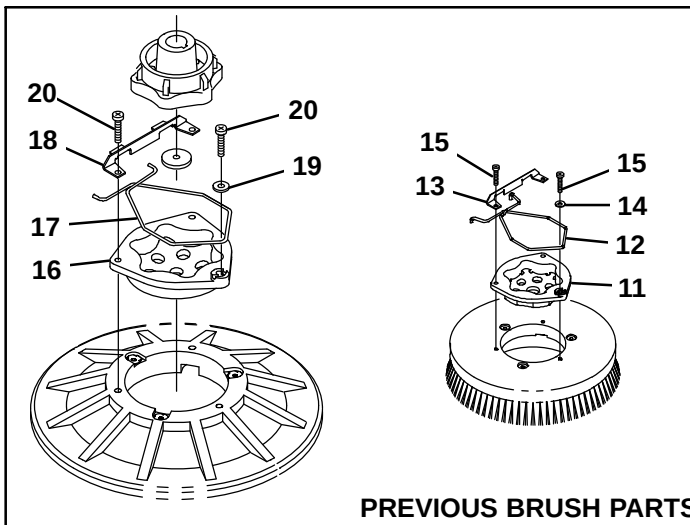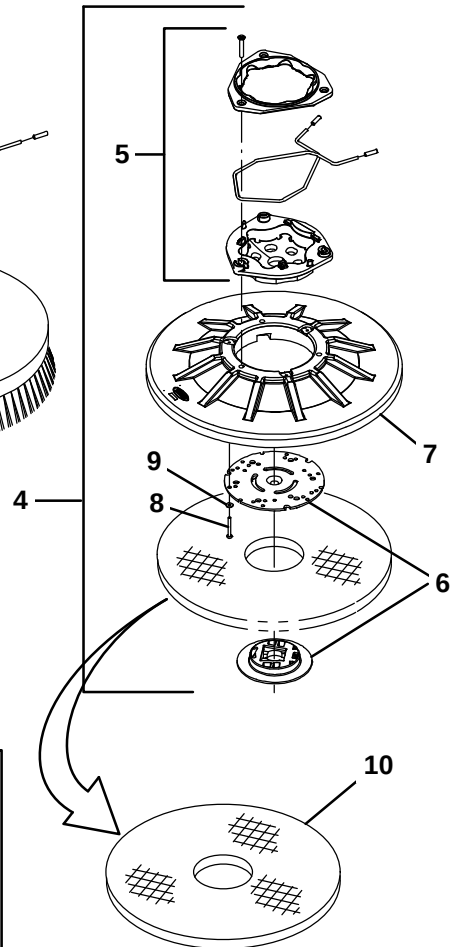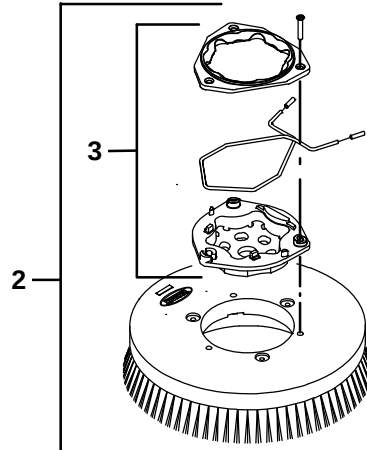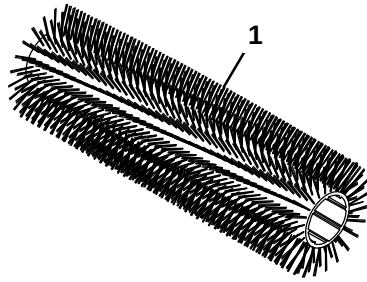

PREVIOUS BRUSH PARTS

Fig. 1 – Replacement Brushes, Scrub Head

Ref.	Part No.	Serial Number	Description	Qty.
1	1201572	(10000000–19999999)	Brush, Scb, 31l, 18sr, Polypropylene, Spiral	2
1	1201926	(10000000–19999999)	Brush, Scb, 31l, 18sr, Heavy Duty Polypropylene, Spiral	2
1	1201927	(10000000–19999999)	Brush, Scb, 31l, 18sr, Polyester, Spiral	2
1	1201928	(10000000–19999999)	Brush, Scb, 31l, 18sr, Super Abrasive, Spiral	2
▽	2	1220235	(10000000–19999999) Brush Assy, Disk, Scrub, 16.0D, Nylon	2
▲	3	9014662	(10000000–19999999) Brush Kit, Hub Assy, Drive, Ci [Hdpe In]	1
▽	2	1220241	(10000000–19999999) Brush Assy, Disk, Scrub, 16.0D, Polypropylene	2
▲	3	9014662	(10000000–19999999) Brush Kit, Hub Assy, Drive, Ci [Hdpe In]	1
▽	2	1221543	(10000000–19999999) Brush Assy, Disk, Scrub, 16.0D, Super Abrasive	2
▲	3	9014662	(10000000–19999999) Brush Kit, Hub Assy, Drive, Ci [Hdpe In]	1
▽	2	1220236	(10000000–19999999) Brush Assy, Disk, Scrub, 16.0D, Heavy Duty Polypropylene	2
▲	3	9014662	(10000000–19999999) Brush Kit, Hub Assy, Drive, Ci [Hdpe In]	1
▽	4	1220244	(10000000–19999999) Driver Assy, Pad, 16.0D	2
▲	5	9014666	(10000000–19999999) Brush Kit, Hub Assy, Drive, Ci [Uhmw]	1
▲	6	370095	(10000000–19999999) Device, Centering, Clip On, Ti [Gf Pp]	1
▲	7	397976	(10000000–19999999) Disk, Driver, Pad, W/Face, 16.0D	1
▲	8	09198	(10000000–19999999) Screw, Pan, Phl, M4 X 0.70 X 35, Ss	3
▲	9	41579	(10000000–19999999) Washer, Flat, 08, Ss	3
10	63248-1	(10000000–19999999)	Pad, Stripping, 16.0d, Brown[1pick=1pad]	2
10	63248-2	(10000000–19999999)	Pad, Scrubbing, 16.0d, Blu [1pick=1pad]	2
10	63248-3	(10000000–19999999)	Pad, Buff, 16.0d, Red [1pick=1pad]	2
10	63248-4	(10000000–19999999)	Pad, Polish, 16.0d, White [1pick=1pad]	2
10	370092	(10000000–19999999)	Pad, Stripping, 16.0d[Hi Prod, Black, 1pick=1pad]	2
10	1051027	(10000000–19999999)	Pad, Surf Prep, 16.0d [Maroon, 1pick=1pad]	2

Previous Brush Parts

Ref.	Part No.	Serial Number	Description	Qty.
11	1017368	(10000000–19999999)	Hub, Drive, Brush, Disk, 3hole 5.8bc	1
12	14838	(10000000–19999999)	Spring, Wir, 0.16d, Brush Retaining	1
13	24299	(10000000–19999999)	Bracket, Retainer, Spring	1
14	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	1
15	32746	(10000000–19999999)	Screw, Pan, Phl, M6 X 1.00 X 35, Ss	2
16	15539	(10000000–19999999)	Hub, Drive, Brush, Disk, 3hole 5.8bc[6t]	1
17	14838	(10000000–19999999)	Spring, Wir, 0.16d, Brush Retaining	1
18	24299	(10000000–19999999)	Bracket, Retainer, Spring	1
19	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	1
20	32746	(10000000–19999999)	Screw, Pan, Phl, M6 X 1.00 X 35, Ss	1
	30241	(10000000–19999999)	Brush Assy, Disk, Scb, 16.0d, Polypropylene (Replaced by 1220241)	2
	1042500	(10000000–19999999)	Brush Assy, Disk, Scb, 16.0d, Polypropylene Stiff (Replaced by 1220236)	2
	1042499	(10000000–19999999)	Brush Assy, Disk, Scb, 16.0d, Nylon (Replaced by 1220235)	2
	1042504	(10000000–19999999)	Brush Assy, Disk, Scb, 16.0d, Super Abrasive (Replaced by 1221543)	2
	397916	(10000000–19999999)	Driver Assy, Pad, 16. (Replaced by 1220244)	2

Fig. 2 – Replacement Brushes, Side Brush

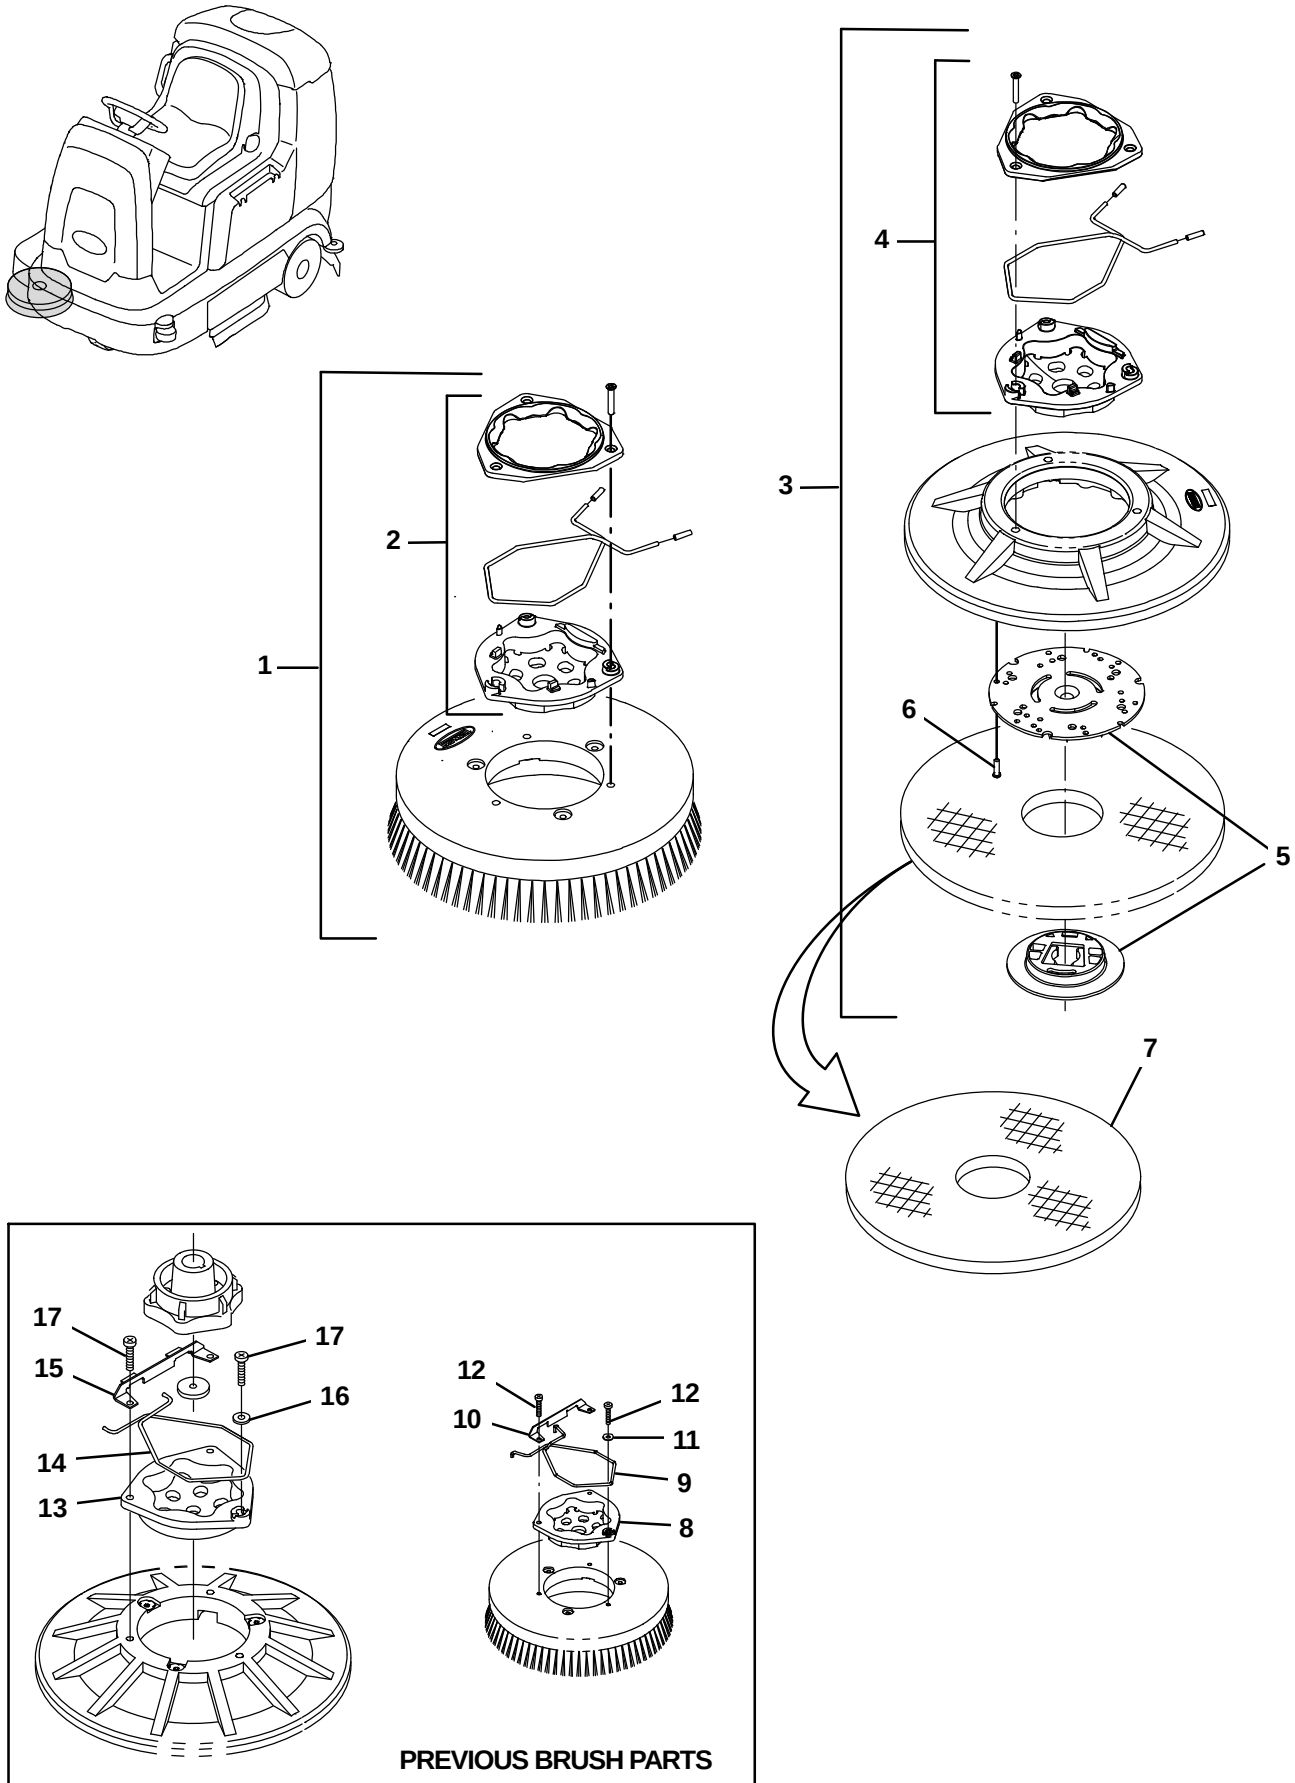


Fig. 2 – Replacement Brushes, Side Brush

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1220230	(10000000–19999999)	Brush Assy, disk, Scb, 13.0D, Nylon	2
▲	2	9014662	(10000000–19999999)	Brush Kit, Hub Assy, Drive, Cl	1
▽	1	1220231	(10000000–19999999)	Brush Assy, disk, Scb, 13.0D, Polypropylene Stiff	2
▲	2	9014662	(10000000–19999999)	Brush Kit, Hub Assy, Drive, Cl	1
▽	1	1220232	(10000000–19999999)	Brush Assy, disk, Scb, 13.0d, Super Abrasive	2
▲	2	9014662	(10000000–19999999)	Brush Kit, Hub Assy, Drive, Cl	1
▽	3	1220243	(10000000–19999999)	Driver Assy, Pad, 13.0D	1
▲	4	9014664	(10000000–19999999)	Brush Kit, Hub Assy, Drive, Cl	1
▲	5	370095	(10000000–19999999)	Device, Centering, Clip On, TI [Gf Pp]	1
▲	6	360943	(10000000–19999999)	Screw, Pan, Phl, 10–14 X 0.75, F/Plstc	3
	7	89046	(10000000–19999999)	Pad, Stripping, 13.0d, Brown[1pick=1pad]	2
	7	89047	(10000000–19999999)	Pad, Scrubbing, 13.0d, Blue	2
	7	89048	(10000000–19999999)	Pad, Buff, 13.0d, Red [1pick=1pad]	2
	7	89049	(10000000–19999999)	Pad, Polish, 13.0d, White [1pick=1pad]	2
	7	1051024	(10000000–19999999)	Pad, Surf Prep, 13.0d [Mar, 1pick=1pad]	2
	Ref.	Part No.	Serial Number	Description	Qty.
	8	1017368	(10000000–19999999)	Hub, Drive, Brush, Disk, 3hole 5.8bc	1
	9	14838	(10000000–19999999)	Spring, Wir, 0.16d, Brush Retaining	1
	10	24299	(10000000–19999999)	Bracket, Retainer, Spring	1
	11	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	1
	12	32746	(10000000–19999999)	Screw, Pan, Phl, M6 X 1.00 X 35, Ss	3
	13	1017368	(10000000–19999999)	Hub, Drive, Brush, Disk, 3hole 5.8bc	1
	14	1017957	(10000000–19999999)	Spring, Retaining, Brush	1
	15	24299	(10000000–19999999)	Bracket, Retainer, Spring	1
	16	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	1
	17	32746	(10000000–19999999)	Screw, Pan, Phl, M6 X 1.00 X 35, Ss	3
		1042492	(10000000–19999999)	Brush Assy, Disk, Scb, 13.0d, Nylon (Scrubbing) (Replaced by 1220230)	1
		1042494	(10000000–19999999)	Brush Assy, Disk, Scb, 13.0d, Polypropylene Stiff (Scrubbing) (Replaced by 1220231)	1
		1042496	(10000000–19999999)	Brush Assy, Disk, Scb, 13.0d, Super Abrasive (Scrubbing) (Replaced by 1220232)	1
		379013	(10000000–19999999)	Driver Assy, Pad, 13.0d (Replaced by 1220243)	2

Fig. 3 – Main Frame and Wheels Group

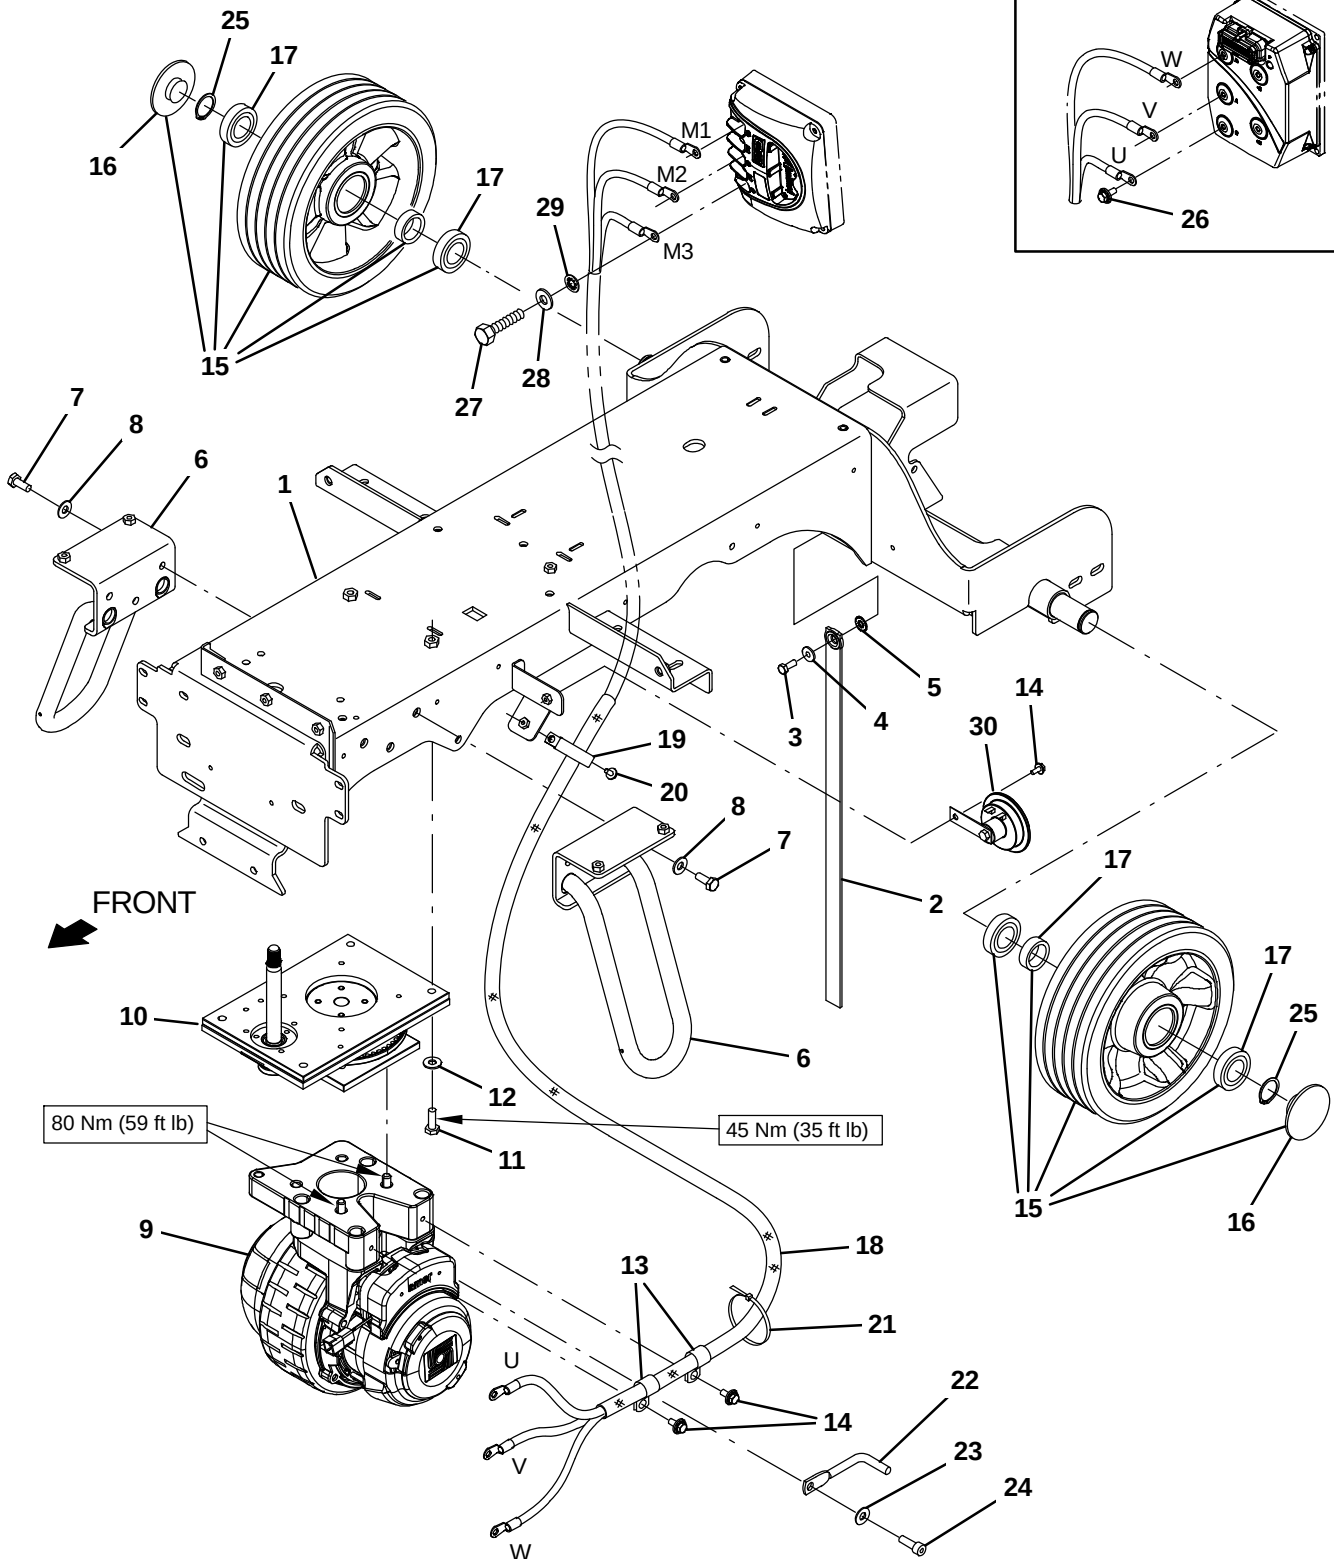


Fig. 3 – Main Frame and Wheels Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200025	(10000000–19999999)	Frame Wldt [T12]	1
2	71579	(10000000–19999999)	Strap, Static, W/Grommet, .19 1.1w 25.0l	1
3	09011	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	1
4	41141	(10000000–19999999)	Washer, Lock, Int–Ext, 0.31	1
5	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	1
6	1200298	(10000000–19999999)	Stabilizer Wldt [Cassoday]	2
7	12317	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 30, Ss	6
8	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	6
9	1200150	(10000000–10956761)	Wheel, Drive, Ac (Replaced by 1255933)	1
9	1246662	(10956762–11025471)	Wheel, Drive, Ac (See Breakdown) (Replaced by 1255933)	1
9	1255933	(11025472–19999999)	Wheel, Drive, Ac (See Breakdown)	1
10	1200203	(10000000–11017501)	Steer–Control Assy, Wheel Drive (See Breakdown) (Replaced by 1256309)	1
10	1256309	(11017502–19999999)	Steer–Control Assy, Wheel Drive (See Breakdown)	1
11	09028	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 25, Ss	4
12	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	4
13	69234	(10000000–19999999)	Clamp, Cable, Stl, 1.00d X 0.75w, 1hole	2
14	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	3
▽ 15	1060626	(10000000–19999999)	Tire Assy, Solid, 300mm X 100mm, Ure	2
▲ 16	9011872	(10000000–19999999)	Cap, Hub, Wheel [For 1060626]	1
▲ 17	24899	(10000000–19999999)	Bearing, Ball 1.48B 2.38B 0.67W	2
18	82831	(10000000–19999999)	Sleeve, Nyl, 1.63ID 35.0l	1
19	09570	(10000000–19999999)	Clamp, Cable, Stl, 0.9x1.8x0.62w, 1hole	1
20	1034731	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	1
21	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	3
22	1207171	(10000000–19999999)	Rod, Sppt	1
23	33924	(10000000–19999999)	Washer, Flat, M10, Ss	1
24	41358	(10000000–19999999)	Screw, Soc, M10X1.50X35, 12.9	1
25	1059019	(10000000–19999999)	Ring, Retaining, Ext, 1.375od	2
26	1034731	(10000000–10863997)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	3
27	87308	(10863998–19999999)	Screw, Hex, M6 X 1.00 x 12, 8.8	3
28	32483	(10863998–19999999)	Washer, Flat, 0.25, Sae	3
29	32982	(10863998–19999999)	Washer, Lock, Int, 0.25	3
30	1057780	(10000000–19999999)	Horn, 36vdc, 110dba	1

Fig. 4 – Front Bumper and Side Door Group

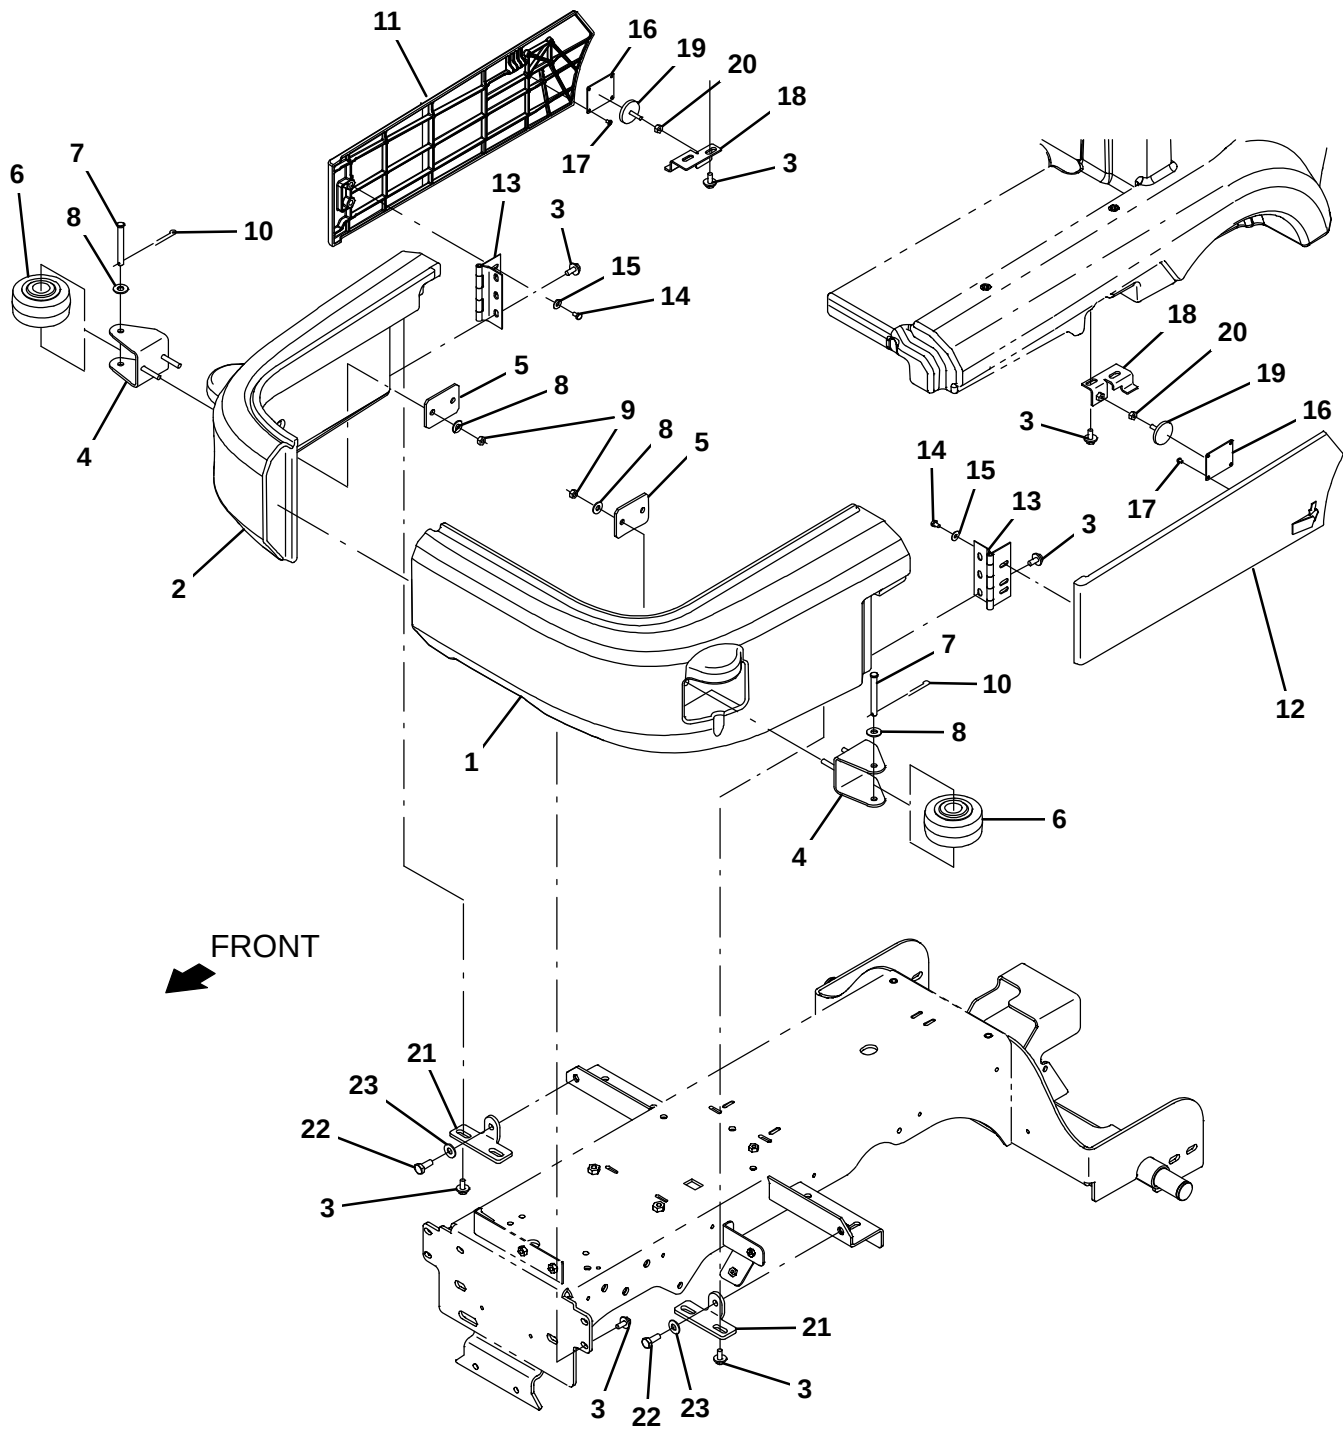


Fig. 4 – Front Bumper and Side Door Group

Ref.	Part No.	Serial Number	Description	Qty.
1	9010924	(10000000–19999999)	Bumper, Lh, Afmkt [T12]	1
2	9010925	(10000000–19999999)	Bumper, Rh, Afmkt [T12]	1
3	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	15
4	1200869	(10000000–19999999)	Channel Wldt, Rlr	2
5	1200870	(10000000–19999999)	Plate, Backing, Roller	2
6	1054100	(10000000–19999999)	Wheel, 04.0d 2.56w 0.41b	2
7	57598	(10000000–19999999)	Pin, Clevis, 0.37d X 3.25l	2
8	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	6
9	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	4
10	44906	(10000000–19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	2
11	1202289	(10000000–19999999)	Panel, Door, Rh	1
12	1202392	(10000000–19999999)	Panel, Door, Lh	1
13	1202349	(10000000–19999999)	Hinge, Brush Door, Bent	2
14	06941	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 10, 8.8	4
15	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	4
16	1202941	(10000000–19999999)	Plate, Latch	2
17	1203025	(10000000–19999999)	Screw, Pan, Phl, 08–16 X 0.25, F/Plstc	8
18	1200984	(10000000–19999999)	Bracket Wldt, Latch, Lh	2
19	1202779	(10000000–19999999)	Magnet, Latch, Brush Door	2
20	32520	(10000000–19999999)	Nut, Hex, Jam, .25–20	2
21	1200460	(10000000–19999999)	Bracket, Bumper, Right	2
22	09028	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 25, Ss	2
23	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	2

Fig. 5 – Seat Support Group

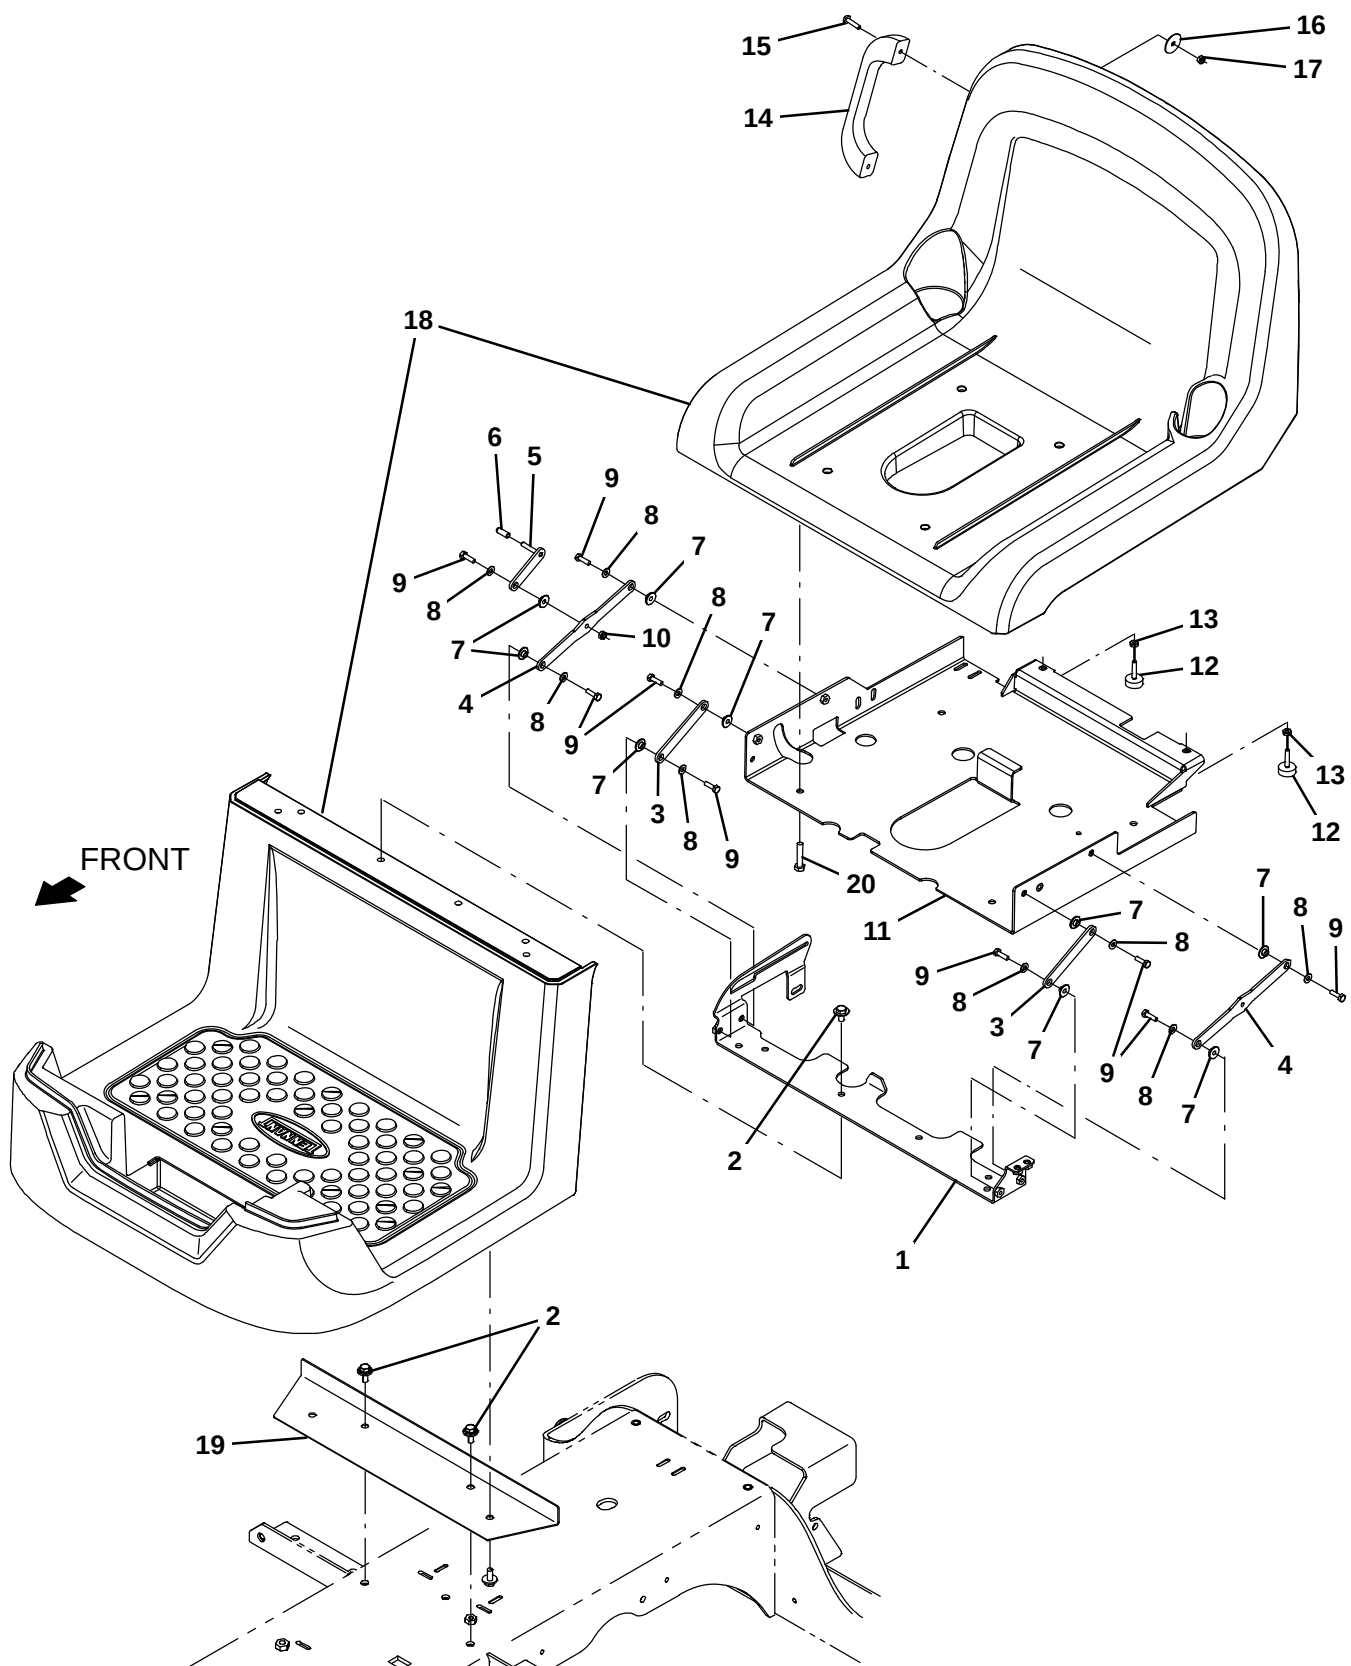


Fig. 5 – Seat Support Group

Ref.	Part No.	Serial Number	Description	Qty.
1	9011057	(10000000–19999999)	Plate Wldt, Mtg, W/Label, Aftmkt, Na	1
1	9011058	(10000000–19999999)	Plate Wldt, Mtg, W/Label, Aftmkt, JP	1
2	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	10
3	1200827	(10000000–19999999)	Link, Oprtr Station	2
4	1200828	(10000000–19999999)	Link, Oprtr Station	2
5	1201103	(10000000–19999999)	Link Wldt, Oprtr Station	1
6	1202957	(10000000–19999999)	Grip, Handle, .25d .90l Yel	1
7	1202156	(10000000–19999999)	Sleeve, Flange	9
8	19066	(10000000–19999999)	Washer, Flat, 0.25b 0.56d .05, Pl, 10	10
9	08716	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 20, Ss	9
10	08708	(10000000–19999999)	Nut, Hex, Lock, M6 X 1.00, NI	1
11	1200210	(10000000–19999999)	Channel Wldt, Seat	1
12	20802	(10000000–19999999)	Bumper, Rbr, 1.0d 0.38th .25–20	2
13	32520	(10000000–19999999)	Nut, Hex, Jam, .25–20	2
14	381962	(10000000–19999999)	Handle, Container	1
15	382726	(10000000–19999999)	Screw, Pan, Phl, M6 X 1.00 X 25, 4.8	2
16	41178	(10000000–19999999)	Washer, Flat, 0.25, Fendr	2
17	08712	(10000000–19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2
18	9009632	(10000000–19999999)	Part Kit, Station, Oprtn, Plstc [2Pc=1Kit]	1
19	1200612	(10000000–19999999)	Angle, Support	1
20	09026	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 40, Ss	4

Fig. 6 – Seat Group, Standard

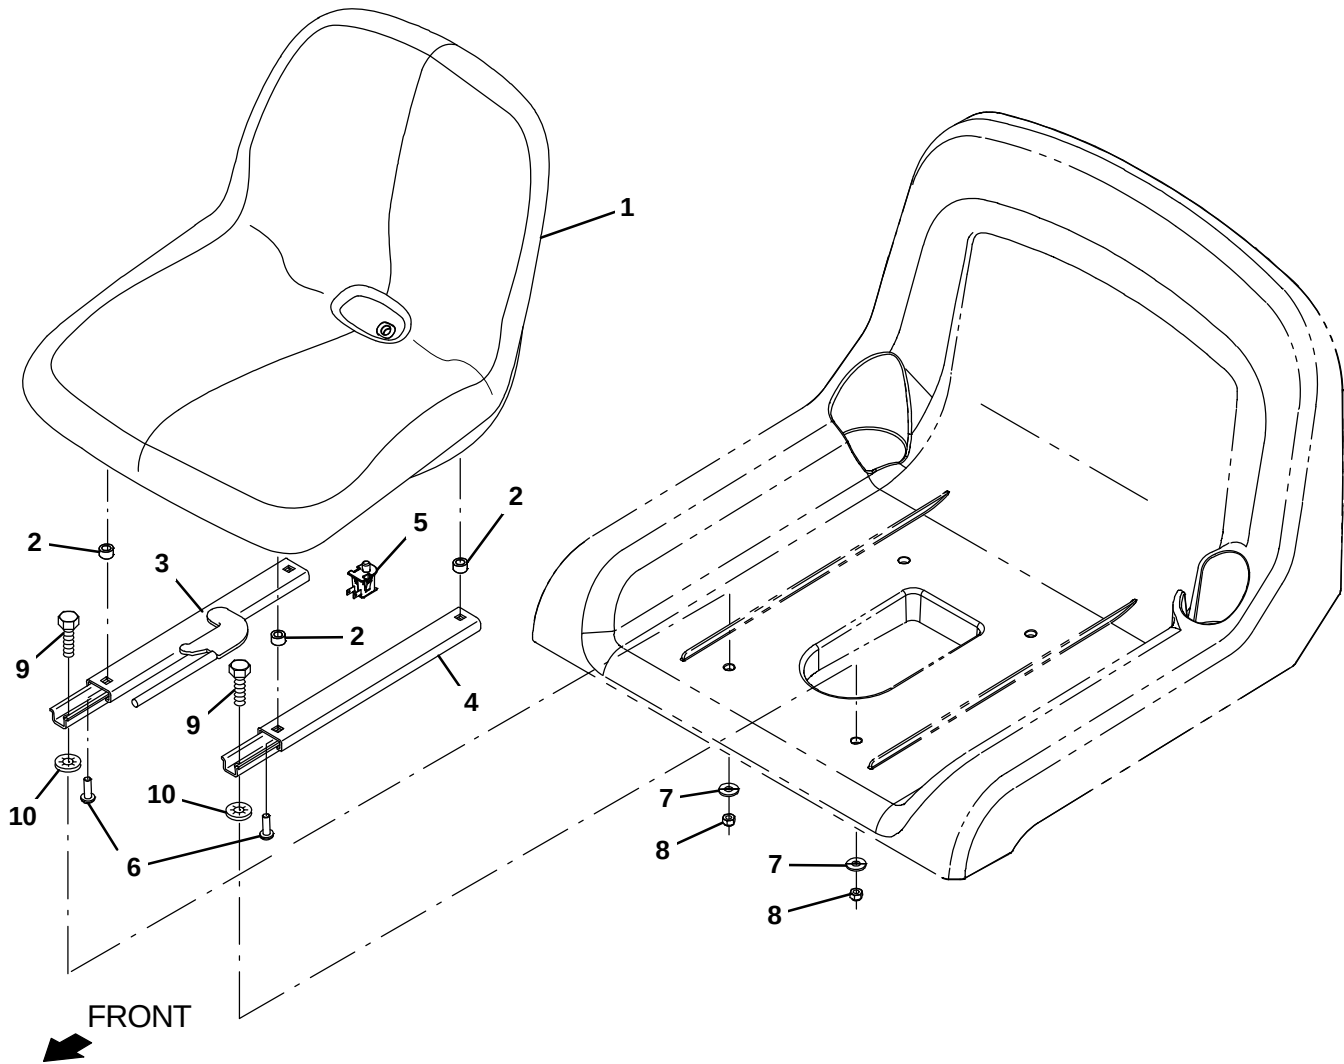


Fig. 6 – Seat Group, Standard

Ref.	Part No.	Serial Number	Description	Qty.
1	1201894	(10000000–19999999)	Seat, Std [Milsco]	1
2	1051052	(10000000–19999999)	Spacer, Rnd, .38b .88d .38l	4
3	1077071	(10000000–19999999)	Track, Locking, 12.5L, No Stud W/Handle	1
4	1077067	(10000000–19999999)	Track, N-Lkg, Seat, 12.5L, No Stud	1
5	1048955	(10000000–19999999)	Switch, Seat, No [Delta 6440–04]	1
6	1035038	(10000000–19999999)	Screw, Hex, .31–18 X 1.38, Ss, NI	4
7	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	4
8	41437	(10000000–19999999)	Nut, Hex, Lock, .31–18, NI, Ss	4
9	76955	(10000000–19999999)	Track, N-Lkg, Seat, 12.5L, No Stud	4
10	1077073	(10000000–19999999)	Nut, Push, Bolt Retension, Stl, 5/16 Thrd	4

Fig. 7 – Seat Kit, Deluxe

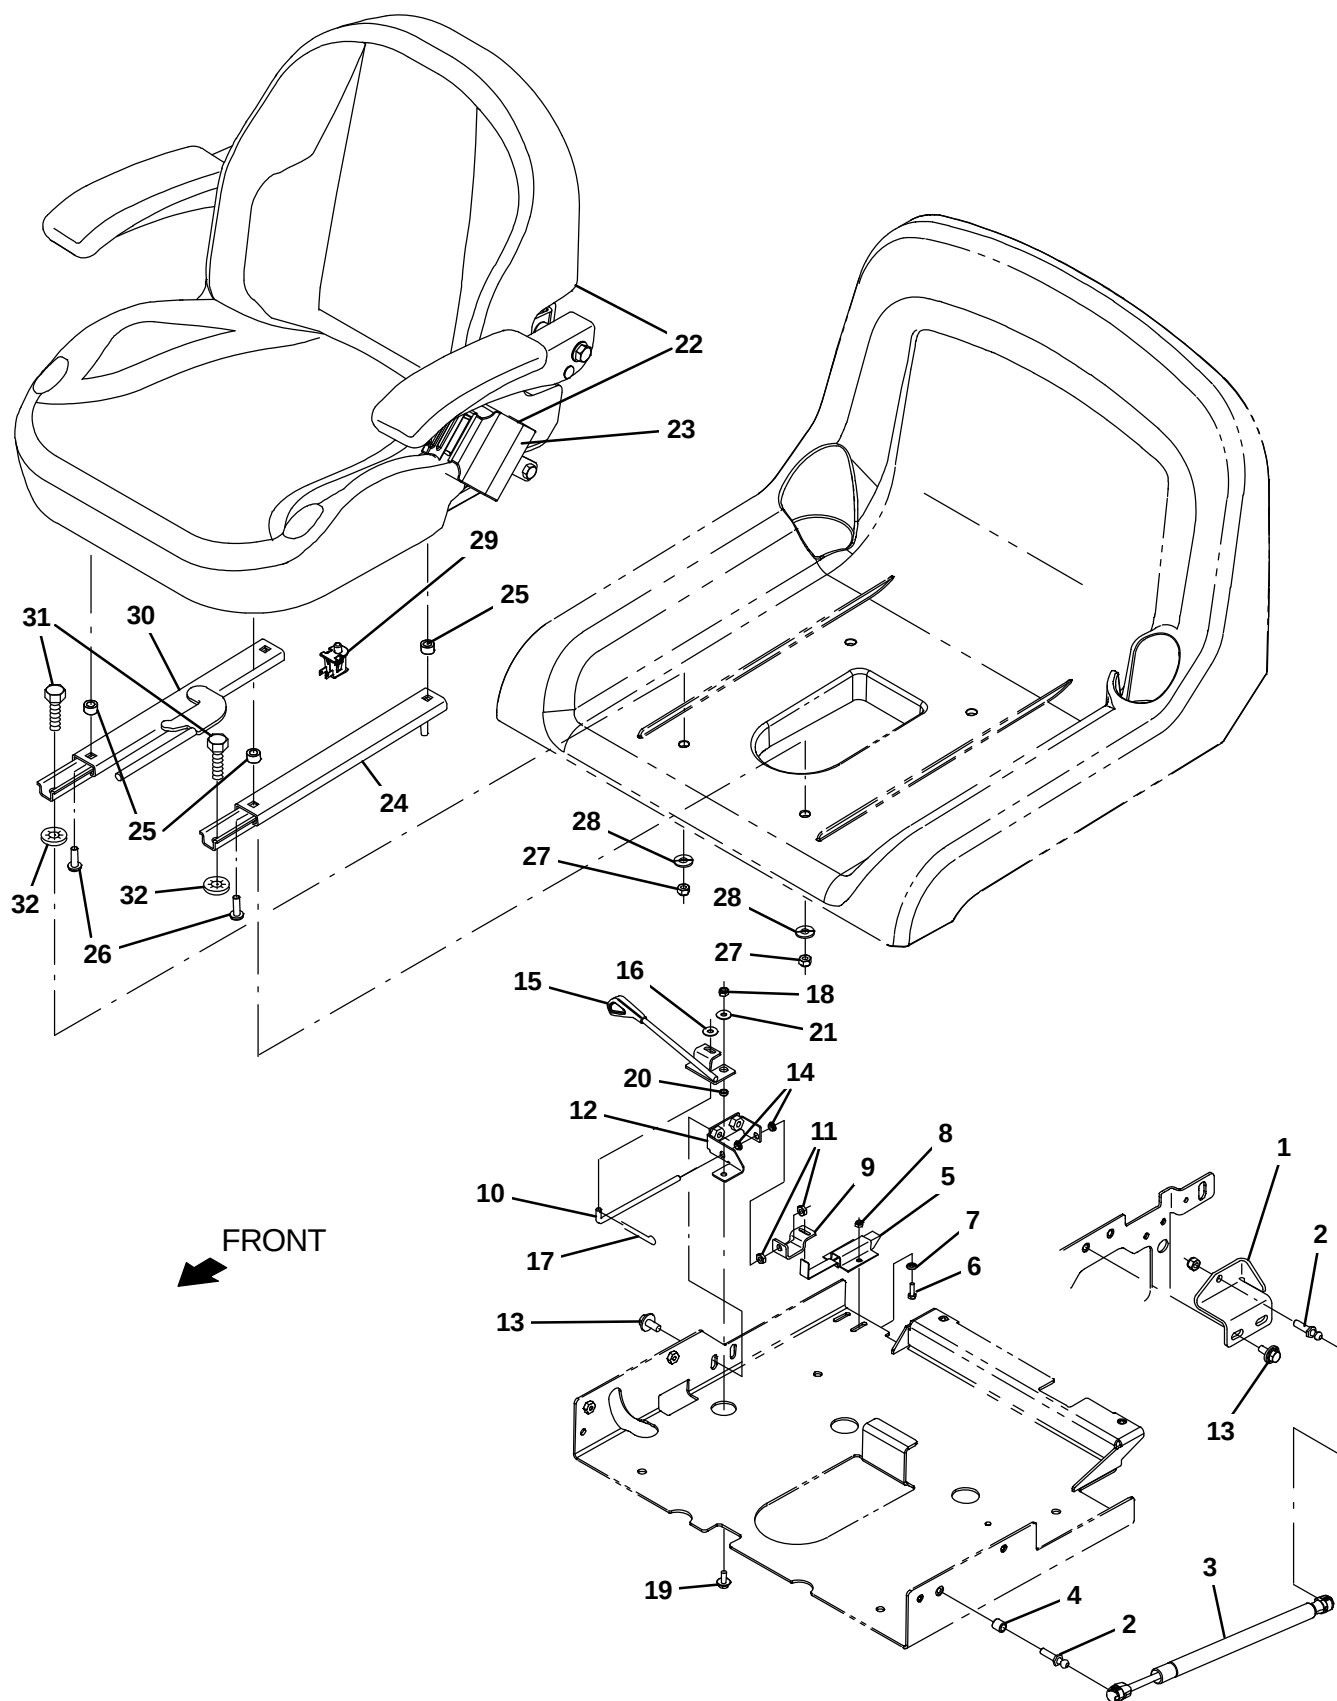


Fig. 7 – Seat Kit, Deluxe

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009836	(10000000–19999999)	Seat Kit, Deluxe, Ci [T12]	1
▲	1	1202800	(10000000–19999999)	Bracket, Mtg, Ball Stud	1
▲	2	1012878	(10000000–19999999)	Stud, Ball, .39d .31–18	2
▲	3	1260773	(10000000–19999999)	Gas spring, 30lb, 8.0strk	1
▲	4	222460	(10000000–19999999)	Sleeve, P/M, 0.32b 0.50d 0.5l [430ss]	1
▲	5	1025736	(10000000–19999999)	Latch	1
▲	6	24199	(10000000–19999999)	Screw, Hex, M5 X 0.80 X 16, Ss	2
▲	7	140011	(10000000–19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	2
▲	8	09739	(10000000–19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
▲	9	1200999	(10000000–19999999)	Angle, Latch	1
▲	10	1203958	(10000000–19999999)	Handle, Latch	1
▲	11	32520	(10000000–19999999)	Nut, Hex, Jam, .25–20	2
▲	12	1203946	(10000000–19999999)	Bracket Wldt, Latch	1
▲	13	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	4
▲	14	80921	(10000000–19999999)	Bushing, Snap-In, 0.25b 0.31d 0.08th Nyl	2
▲	15	1205295	(10000000–19999999)	Handle Assy, Latch, Seat	1
▲	16	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	2
▲	17	08085	(10000000–19999999)	Pin, Cotter, Hair, 0.31d .058 Wir	1
▲	18	08712	(10000000–19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	1
▲	19	1034731	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	1
▲	20	1205764	(10000000–19999999)	Sleeve, P/M, 0.25b 0.38d 0.1l [430ss]	1
▲	21	29570	(10000000–19999999)	Washer, Flat, 0.28b 1.00d .06, Stl	1
▲▽	22	1201428	(10000000–19999999)	Seat, Dlx, W/ Armrests & Seatbelt	1
▲▲	23	1248442	(10000000–19999999)	Seatbelt, Orange, Retractable, Afmkt	1
▲	24	1077067	(10000000–19999999)	Track, N-Lkg, Seat, 12.5L, No Stud	1
▲	25	1051052	(10000000–19999999)	Spacer, Rnd, .38b .88d .38l	4
▲	26	1035038	(10000000–19999999)	Screw, Hex, .31–18 X 1.38, Ss, NI	4
▲	27	41437	(10000000–19999999)	Nut, Hex, Lock, .31–18, NI, Ss	4
▲	28	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	4
▲	29	1048955	(10000000–19999999)	Switch, Seat, No [Delta 6440–04]	4
▲	30	1077071	(10000000–19999999)	Track, Locking, 12.5L, No Stud W/Handle	1
▲	31	76955	(10000000–19999999)	Screw, Hex, .31–18 X 1.00, G5	4
▲	32	1077073	(10000000–19999999)	Nut, Push, Bolt Retension, Stl, 5/16 Thrd	4

Fig. 8 – Steering and Instrument Panel Group, T12

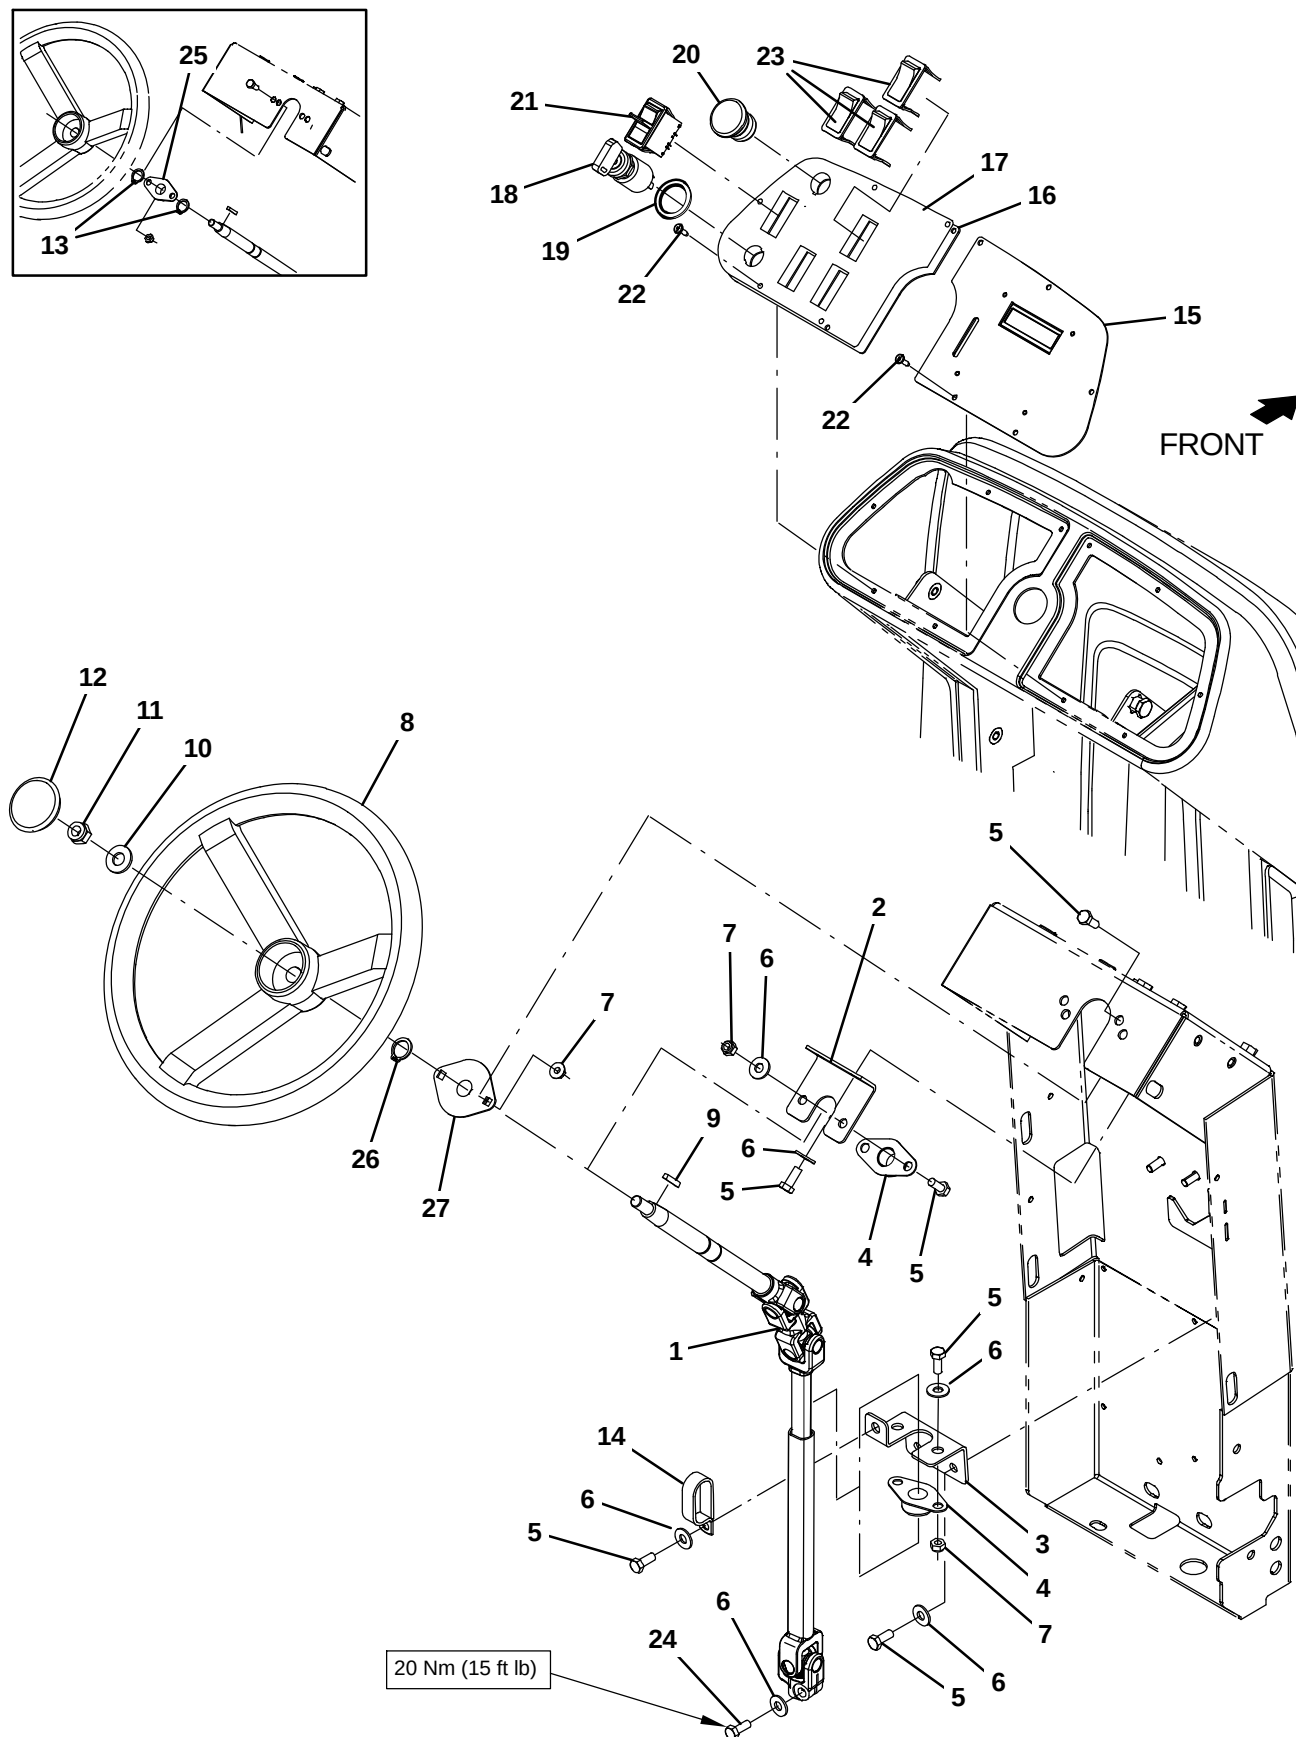


Fig. 8 – Steering and Instrument Panel Group, T12

Ref.	Part No.	Serial Number	Description	Qty.
1	1202600	(10000000–19999999)	Shaft Assy, Steering, Basic	1
2	1201253	(10000000–19999999)	Bracket, Mtg, Brg	1
3	1205753	(10000000–19999999)	Bracket Wldt, Sppt, Brg	1
4	223065	(10000000–19999999)	Bearing, Flng, 2hole, 0.75b [Nyl]	2
5	16931	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, 8.8	5
6	32491	(10000000–19999999)	Washer, Flat, 0.31, Std	8
7	08709	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI	6
8	1036490	(10000000–19999999)	Wheel, Steering, 14.0d, Taper Bore	1
9	00912	(10000000–19999999)	Key, Sq, 0.19 X 0.19, 1.00l	1
10	08711	(10000000–19999999)	Nut, Hex, Lock, M12 X 1.75, NI	1
11	32493	(10000000–19999999)	Washer, Flat, 0.50, Std	1
12	1038966	(10000000–19999999)	Cap, Wheel, Steering	1
13	26428	(10000000–10638330)	Ring, Retaining, Ext, 0.75d, Hd	2
14	09570	(10000000–19999999)	Clamp, Cable, Stl, 0.9x1.8x0.62w, 1hole	1
15	9013277	(10000000–19999999)	Panel kit, Cntrl, Replmt [T12]	1
16	1201180	(10000000–10962735)	Panel, Console, Lh	1
16	1238865	(10962736–19999999)	Panel, Console, Lh	1
17	1204177	(10000000–10962735)	Label, Opertnl, Console, Lh	1
17	1238872	(10962736–19999999)	Label, Opertnl, Console, Lh	1
▽ 18	361076	(10000000–19999999)	Switch, Ignition [Merit Gmbh]	1
▲	361144	(10000000–19999999)	Key, ignition, Sgl	1
19	82226	(10000000–19999999)	Washer, Flat, 0.91b 1.38d .06, Stl, Pl	1
20	1011735	(10000000–19999999)	Switch, Safety, Shutoff	1
21	1058679	(10000000–19999999)	Switch, Rocker, Dpdt, On / None / On	1
22	140825	(10000000–19999999)	Screw, Pan, Phl, 06 X 0.50, Fmg/Ab, Blk	10
23	398501	(10000000–19999999)	Plug, Hole, Rt, Rocker Switch, .87 X 1.7	3
24	39277	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, 8.8	1
25	223065	(10000000–10638330)	Bearing, Flng, 2hole, 0.75b [Nyl]	1
26	26428	(10638331–19999999)	Ring, Retaining, Ext, 0.75D, Hd	1
27	1057554	(10638331–19999999)	Bearing, Flng, 2hole, 0.75b	1

Fig. 9 – Steering and Instrument Panel Group, T12XP

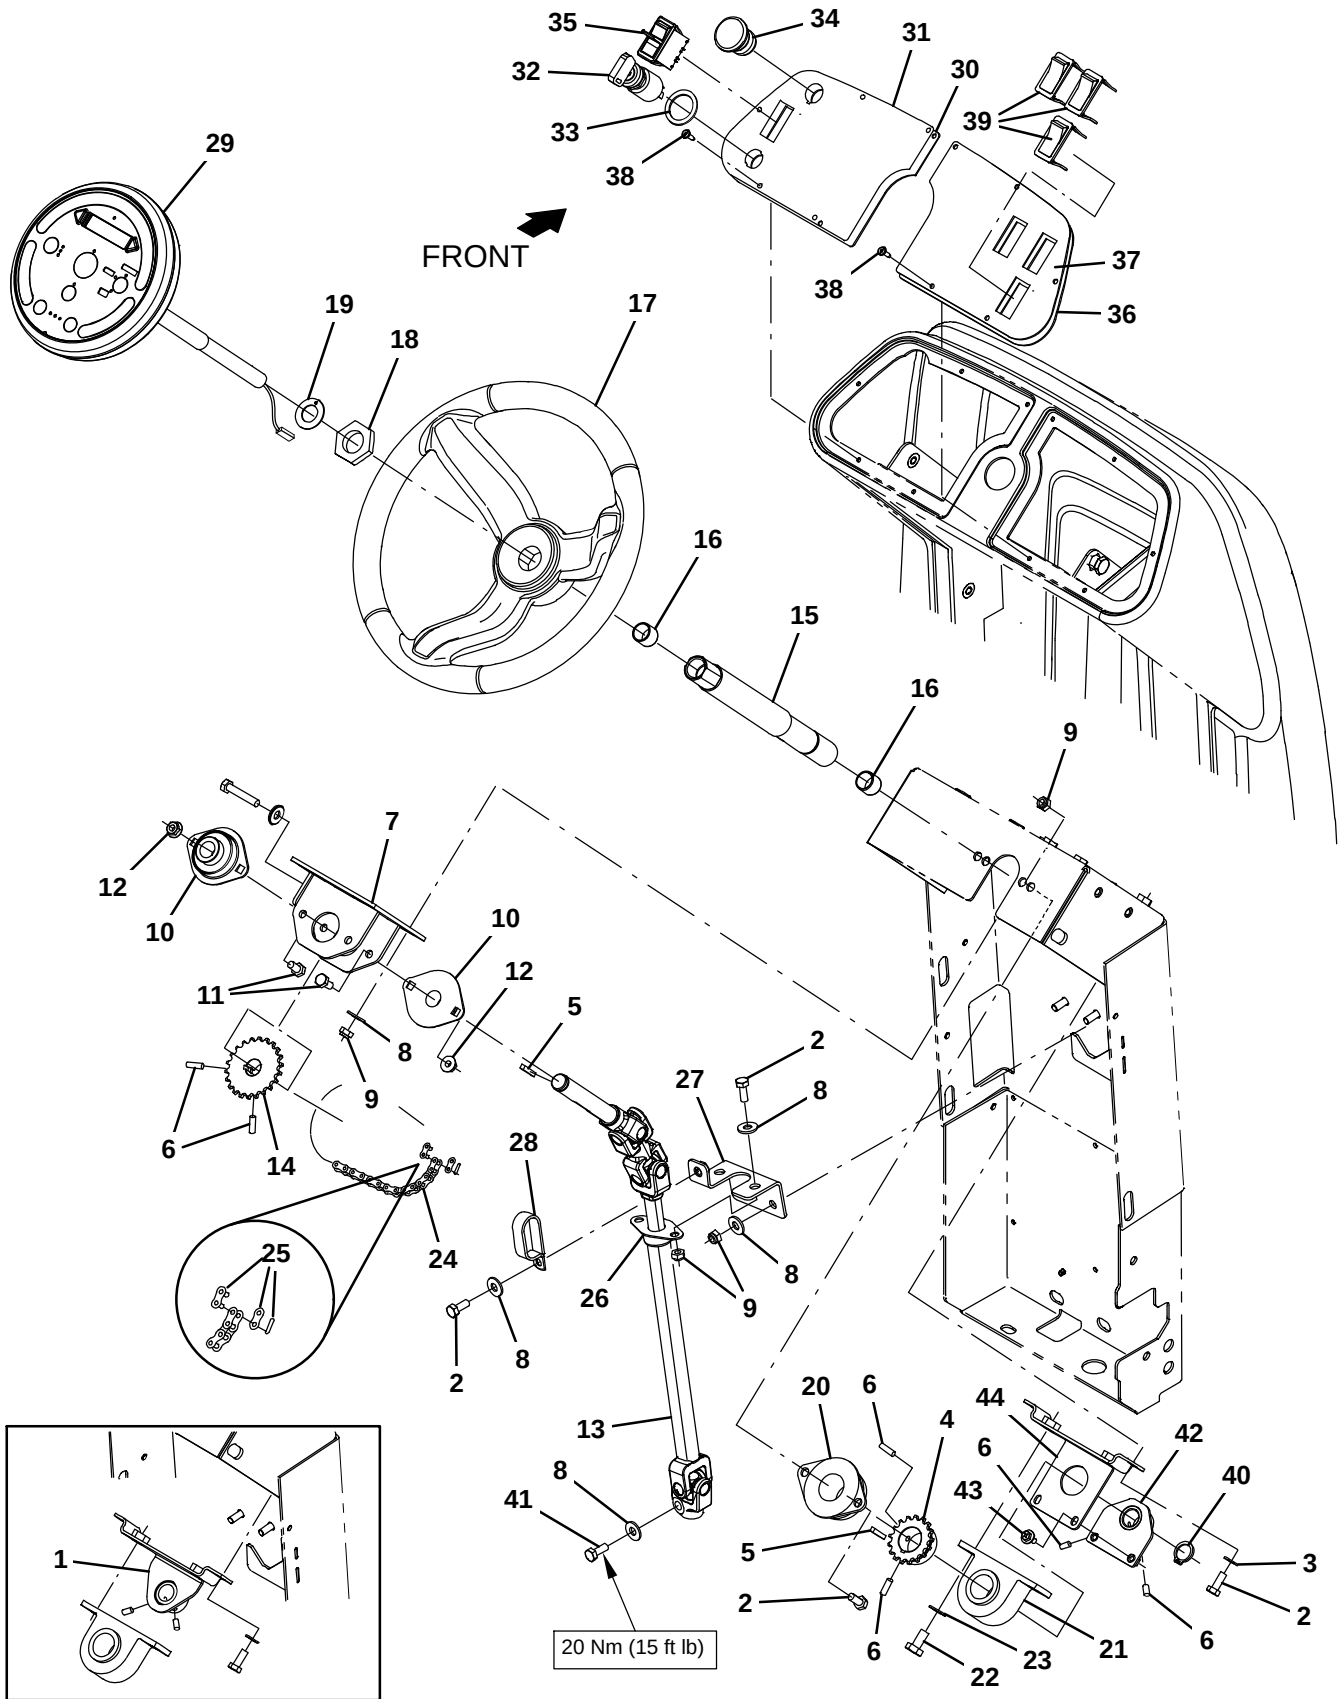


Fig. 9 – Steering and Instrument Panel Group, T12XP

Ref.	Part No.	Serial Number	Description	Qty.	
1	1200263	(10000000–10713299)	Bracket Wldt, Brg	1	
2	16931	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, 8.8	7	
3	32490	(10000000–19999999)	Washer, Flat, 0.25, Std	2	
4	9010942	(10000000–19999999)	Sprocket Kit, 1.12b, Afmkt [T12]	1	
5	00912	(10000000–19999999)	Key, Sq, 0.19 X 0.19, 1.00l	2	
6	09162	(10000000–19999999)	Screw, Set, M6 X 1.00 X 8, NI	6	
7	1057572	(10000000–19999999)	Plate Wldt, Sppt, Brg	1	
8	32491	(10000000–19999999)	Washer, Flat, 0.31, Std	10	
9	08709	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI	10	
10	1057554	(10000000–19999999)	Bearing, Flng, 2hole, 0.75b	2	
11	16735	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 16, 8.8	4	
12	07791	(10000000–19999999)	Nut, Hex, Flng, M8 X 1.25	4	
13	1202601	(10000000–19999999)	Shaft Assy, Steering [T12]	1	
14	9010943	(10000000–19999999)	Sprocket Kit, 0.75b, Afmkt [T12]	1	
15	1201150	(10000000–10713299)	Tube, Column, Steering	1	
15	1221846	(10713300–19999999)	Tube, Column, Steering	1	
16	1057785	(10000000–19999999)	Bearing, Journal, 0.75b 0.88d 0.75l	2	
17	1056412	(10000000–19999999)	Wheel, Steering, 14.4d	1	
18	1059073	(10000000–19999999)	Nut, Hex, Jam, 1.12–12	1	
19	04846	(10000000–19999999)	Washer, Thrust, 0.79b 1.42d 0.06[Garlok]	1	
20	1057043	(10000000–19999999)	Bearing, Flng, 2hole, 1.25b	1	
21	1054654	(10000000–19999999)	Bearing, Pillowblock, 1.12b	1	
22	06961	(10000000–19999999)	Screw, Hex, M10 X 1.5	2	
23	32485	(10000000–19999999)	Washer, Flat, 0.38, Sae	2	
24	1053977	(10000000–19999999)	Chain, Rlr, 35 X 35 Pitches	1	
25	14799	(10000000–19999999)	Link, Chain, Rlr, 35	1	
26	223065	(10000000–19999999)	Bearing, Flng, 2hole, 0.75b [Nyl]	1	
27	1205753	(10000000–19999999)	Bracket Wldt, Sppt, Brg	1	
28	09570	(10000000–19999999)	Clamp, Cable, Stl, 0.9x1.8x0.62w, 1hole	1	
29	9013157	(10000000–10713299)	Panel Assy, Steering Poc, Ci [T12]	1	
29	9010934	(10713300–19999999)	Panel, Pod, W/Instr Afmkt [T12]	1	
30	1201534	(10000000–10962735)	Panel, Console, Lh	1	
30	1238864	(10962736–19999999)	Panel, Console, Lh	1	
31	1204170	(10000000–10962735)	Label, Opertnl, Console, Lh	1	
31	1238867	(10962736–19999999)	Label, Opertnl, Console, Lh	1	
▽	32	361076	(10000000–19999999)	Switch, Ignition [Merit Gmbh]	1
▲		361144	(10000000–19999999)	Key, ignition, Sgl	1
	33	82226	(10000000–19999999)	Washer, Flat, 0.91b 1.38d .06, Stl, Pl	1
	34	1011735	(10000000–19999999)	Switch, Safety, Shutoff	1
	35	1058679	(10000000–19999999)	Switch, Rocker, Dpdt, On / None / On	1
	36	1201535	(10000000–19999999)	Panel, Console, Rh	1
	37	1204176	(10000000–19999999)	Label, Opertnl, Console, Rh	1
	38	140825	(10000000–19999999)	Screw, Pan, Phl, 06 X 0.50, Fmg/Ab, Blk	10
	39	398501	(10000000–19999999)	Plug, Hole, Rt, Rocker Switch, .87 X 1.7	3
	40	70651	(10000000–19999999)	Ring, Retaining, Ext, 1.12d	1
	41	39277	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, 8.8	1
	42	1208625	(10713300–19999999)	Plate Wldt, Brg	1
	43	1034731	(10713300–19999999)	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2
	44	1208622	(10713300–19999999)	Bracket Wldt, Brg	1

Fig. 10 – Front Cover and Directional Pedal Group

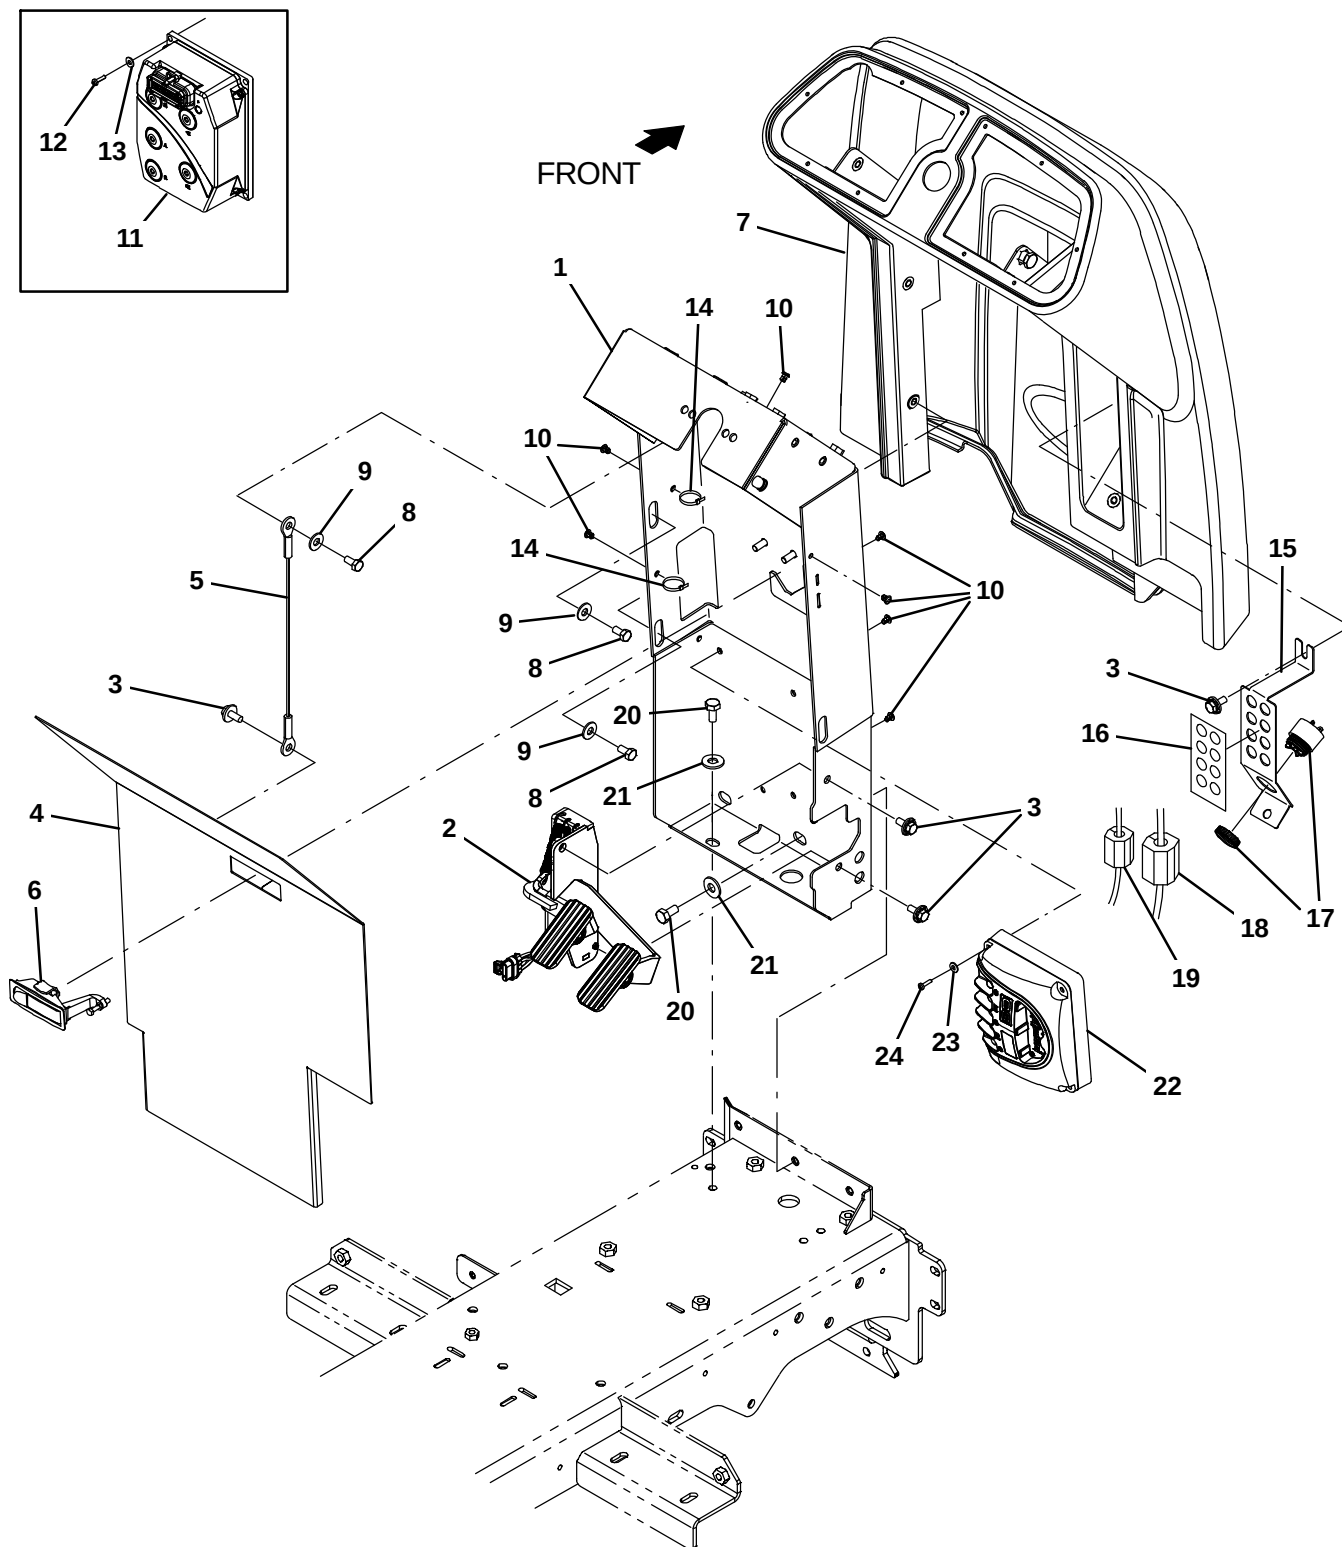


Fig. 10 – Front Cover and Directional Pedal Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200146	(10000000–10863997)	Channel Wldt, Steering, Pntd	1
1	1218569	(10863998–19999999)	Channel Wldt, Steering, Pntd	1
2	1200253	(10000000–19999999)	Pedal Assy, Accelerator, Brake (See Breakdowns)	1
3	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	5
4	9010930	(10000000–19999999)	Panel, Access, Front, Afmkt [T12]	1
4	9011168	(10000000–19999999)	Panel, Access, Front, Afmkt [Jp]	1
5	19676	(10000000–19999999)	Cable, Glv .09d 013.0l .38eye /.38eye	1
6	398806	(10000000–19999999)	Latch	1
7	9010928	(10000000–19999999)	Shroud, Front, Afmkt [T12]	1
8	15675	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 16, Ss	5
9	32491	(10000000–19999999)	Washer, Flat, 0.31, Std	5
10	1202868	(10000000–19999999)	Clip, Tie, 0.25d, Plstc	7
11	1202308	(10000000–10863997)	Controller, 36vdc, 200a [Ac Propel]	1
12	24265	(10000000–10863997)	Screw, Pan, Phl, M4 X 0.70 X 16, Ss	4
13	01683	(10000000–10863997)	Washer, Flat, 10, Ss	4
14	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	7
15	1201212	(10000000–19999999)	Bracket, Ele, Cb [T12]	1
16	1201864	(10000000–19999999)	Label, Circuitbreaker	1
17	1052726	(10000000–19999999)	Alarm, 9–48vdc, 95 Db(A) [Ec–H20]	1
18	1052120	(10000000–19999999)	Inductor, 25Mmid [218 Imp At 25Mhz] (Australia Only)	1
19	1052123	(10000000–19999999)	Inductor, 18Mmid [156 Imp At 25Mhz] (Australia Only)	1
20	39283	(10000000–19999999)	Screw, Hex, M10x 1.50 x 25, 8.8	4
21	32492	(10000000–19999999)	Washer, Flat, 0.38, Std	4
22	1218104	(10863998–19999999)	Controller, Drive [T12]	1
23	19066	(10863998–19999999)	Washer, Flat, 0.25B 0.56D, .05, Pl, 10	4
24	06939	(10863998–19999999)	Screw, Pan, Phl, M5X0.80 X 45, 4.8	4

Fig. 11 – Scrub Head Lift Group

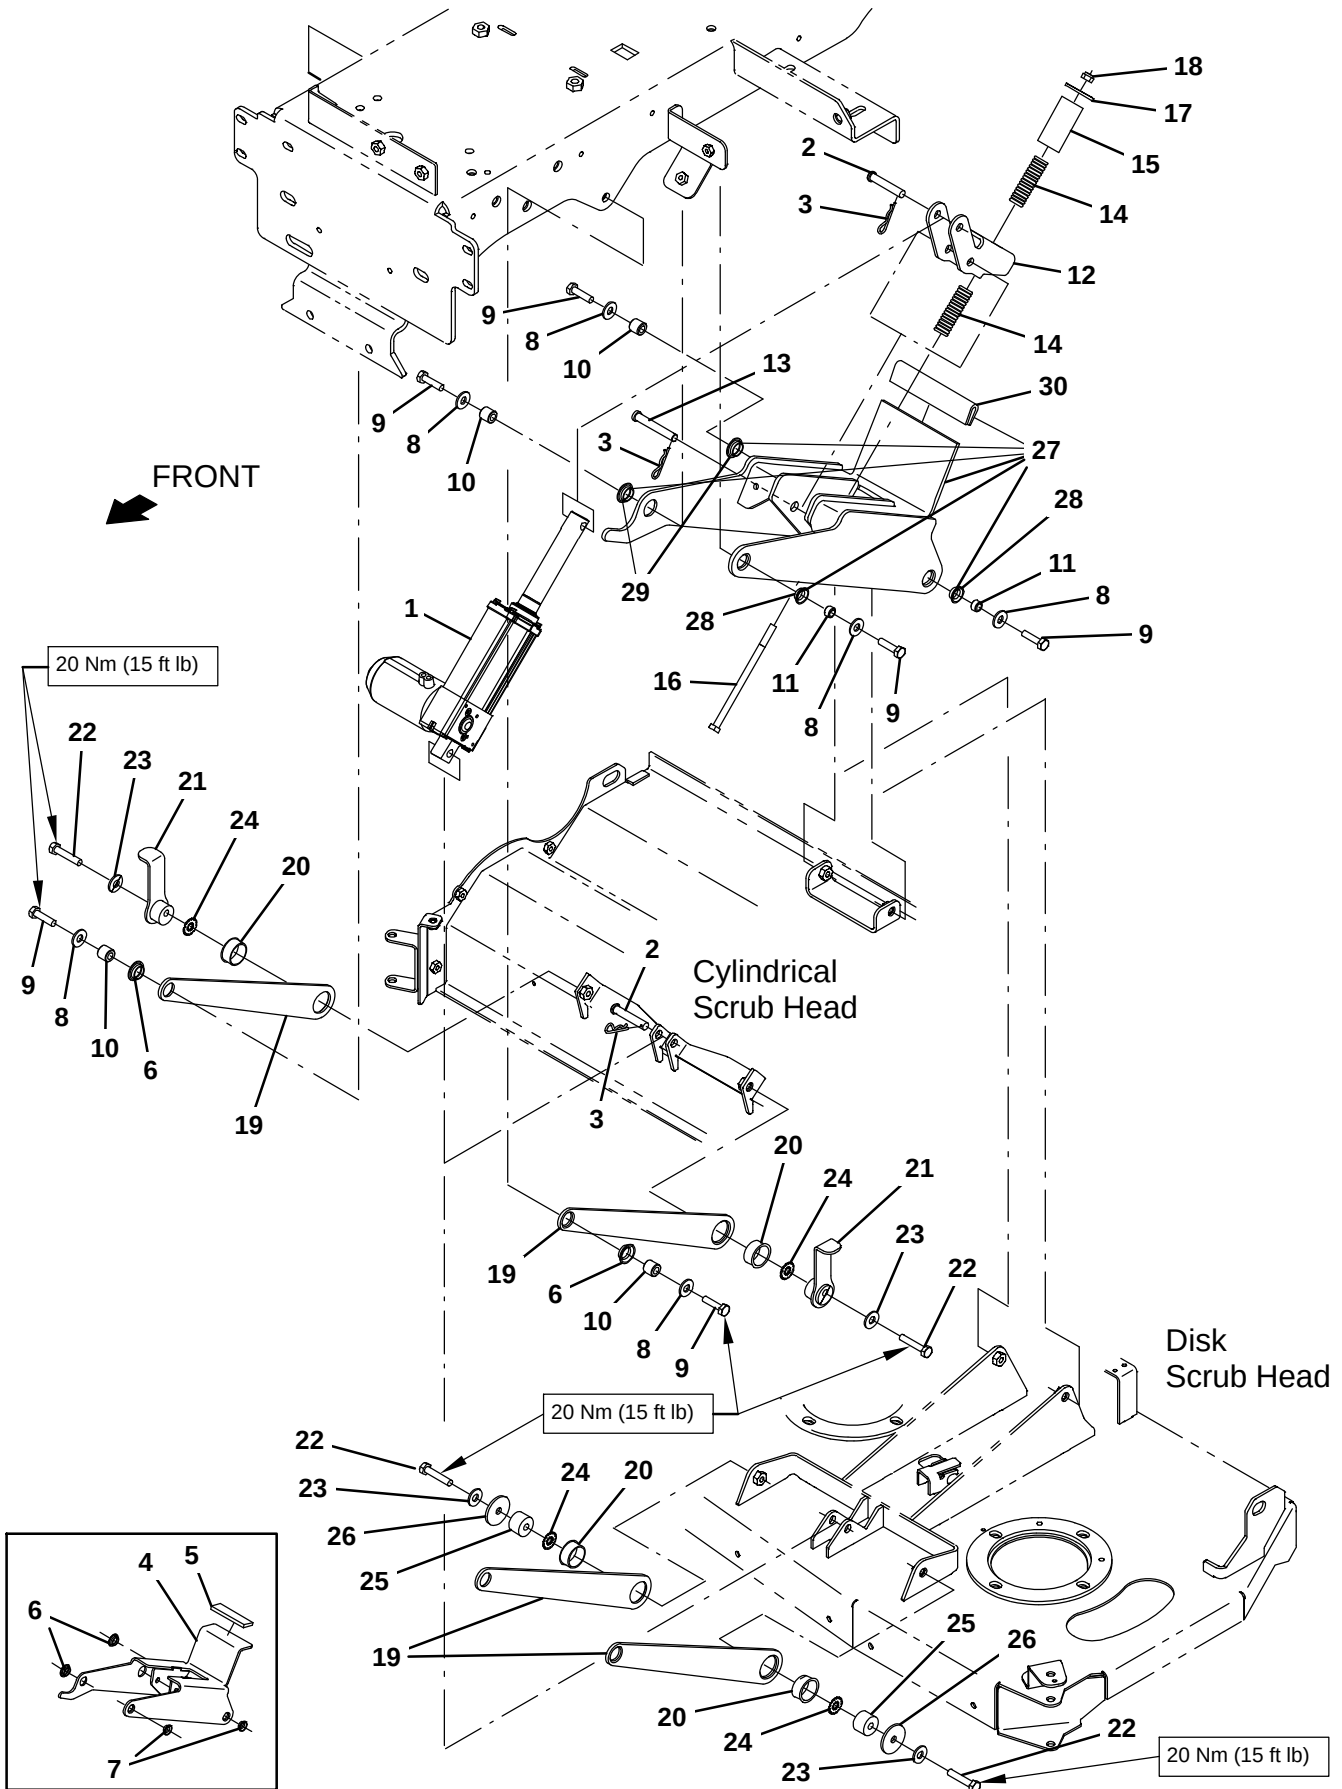


Fig. 11 – Scrub Head Lift Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200774	(10000000-19999999)	Actuator, 36vdc, 3.9strk, 450lb	1
2	29584	(10000000-19999999)	Pin, Clevis, 0.37d X 2.00l	2
3	44906	(10000000-19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	3
4	1200735	(10000000-10728113)	Arm Wldt, Pivot (Replcd by 9013613)	1
5	1200440	(10000000-10728113)	Pad, Stop, Rbr (Replcd by 9013613)	1
6	04843	(10000000-10728113)	Bushing, Flng, 0.63b 0.72d 0.25l	4
7	1054662	(10000000-10728113)	Bushing, Flng, 0.50b 0.59d 0.25l	2
8	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	6
9	09011	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	6
10	80409	(10000000-19999999)	Sleeve, P/M, 0.34b 0.63d 0.6l, Bnz	4
11	222516	(10000000-19999999)	Sleeve, P/M, 0.32b 0.50d 0.3l [430ss]	2
12	1200764	(10000000-19999999)	Bracket, Pivot, Spring	1
13	365180	(10000000-19999999)	Pin, Clevis, 0.38d X 2.50l	1
14	1203336	(10000000-19999999)	Spring, Cmpr, .73od 2.5l	2
15	1204185	(10000000-19999999)	Tube, Bumper	1
16	1201996	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 140, Ss	1
17	379829	(10000000-19999999)	Washer, Flat, 0.34b 1.50d .12, Stl, Pl	1
18	08713	(10000000-19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	1
19	1201033	(10000000-19999999)	Link, Head Scb	2
20	367313	(10000000-19999999)	Bushing, Flng, 1.00b 1.13d 0.50l	2
21	1201080	(10000000-19999999)	Pivot Wldt	2
22	09026	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 40, Ss	2
23	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
24	41141	(10000000-19999999)	Washer, Lock, Int-Ext, 0.31	2
25	1201354	(10000000-19999999)	Pivot, Lift	2
26	379829	(10000000-19999999)	Washer, Flat, 0.34b 1.50d .12, Stl, Pl	2
▽ 27	9013613	(10728114-19999999)	Arm Kit, Lift, Scb [T12]	1
▲ 28	1054662	(10728114-19999999)	Bushing, Flng, 0.50B 0.59D 0.25L	2
▲ 29	04843	(10728114-19999999)	Bushing, Flng, 0.63B 0.72D 0.25L	2
▲ 30	1020168	(10728114-19999999)	Molding, Afmkt, Trim , Pvc, .08 .11, 01Ft	1

FRONT

Fig. 12 – Scrub Head and Drive Motor Group, Disk

	Ref.	Part No.	Serial Number	Description	Qty.
▽ ▲	1	1258968	(10000000-19999999)	Head Wldt, Scrbr, Disc	1
	2	1200168	(10000000-11056554)	Motor, Ele, 36vdc 0315rpm	2
		9009577	(10000000-11056554)	Brush Kit, Motor	2
	3	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	8
	4	09011	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	8
	5	377364	(10000000-19999999)	Hub, Drive, Brush, Disk, 0.75b [6t]	2
	6	00928	(10000000-19999999)	Key, Sq, 0.25 X 0.25, 1.00l	2
	7	09010	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 25, Ss	2
	8	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
	9	41186	(10000000-19999999)	Washer, Flat, Belleville, .31	2
	10	1201053	(10000000-19999999)	Skirt, Rbr, Front, Disc	1
	11	1201190	(10000000-19999999)	Strip, Retainer, Front	1
	12	1201127	(10000000-19999999)	Skirt, Rbr, Rear, Disc	1
	13	1201185	(10000000-19999999)	Strip, Skirt, Rear, Disc	1
	14	01684	(10000000-19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	11
	15	09007	(10000000-19999999)	Screw, Hex, M6 X 1.00 X 25, Ss	9
	16	08708	(10000000-19999999)	Nut, Hex, Lock, M6 X 1.00, NI	9
	17	1201215	(10000000-19999999)	Tube, Distribution, Disc	1
	18	1075240	(10000000-19999999)	Valve, Water, Solenoid, 36vdc Bm12/Bm12	1
	19	223198	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 10, Fmg	6
	20	391365	(10000000-19999999)	Fitting, Plstc, E90, Bm10/Bm10	1
	21	1015026	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.62id, 03ft, Clr	1
	22	63810	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	4
	23	54333	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.31-0.88d, .31w	1
	24	1016354	(10000000-19999999)	Clamp, Cable, Ss, 0.50d X 0.50w [Insul]	2
	25	630371	(10000000-19999999)	Fitting, Plstc, E90, Bm10/Pm08	1
	26	1205975	(10000000-19999999)	Pin, Clevis, 0.37d X 5.00l	2
	27	08236	(10000000-19999999)	Pin, Cotter, .156 X 1.25	2
▽	28	1053341	(11056555-19999999)	Motor, Ele, 36vdc 0360rpm 1.00hp Gear	2
▲		1066573	(11056555-19999999)	Brush Kit, Motor	1
▲		9013931	(11056555-19999999)	Bearing, Motor, Ele	1
▲		9013933	(11056555-19999999)	Bearing, Motor, Ele	1

Fig. 13 – Scrub Head Frame Group, Cylindrical

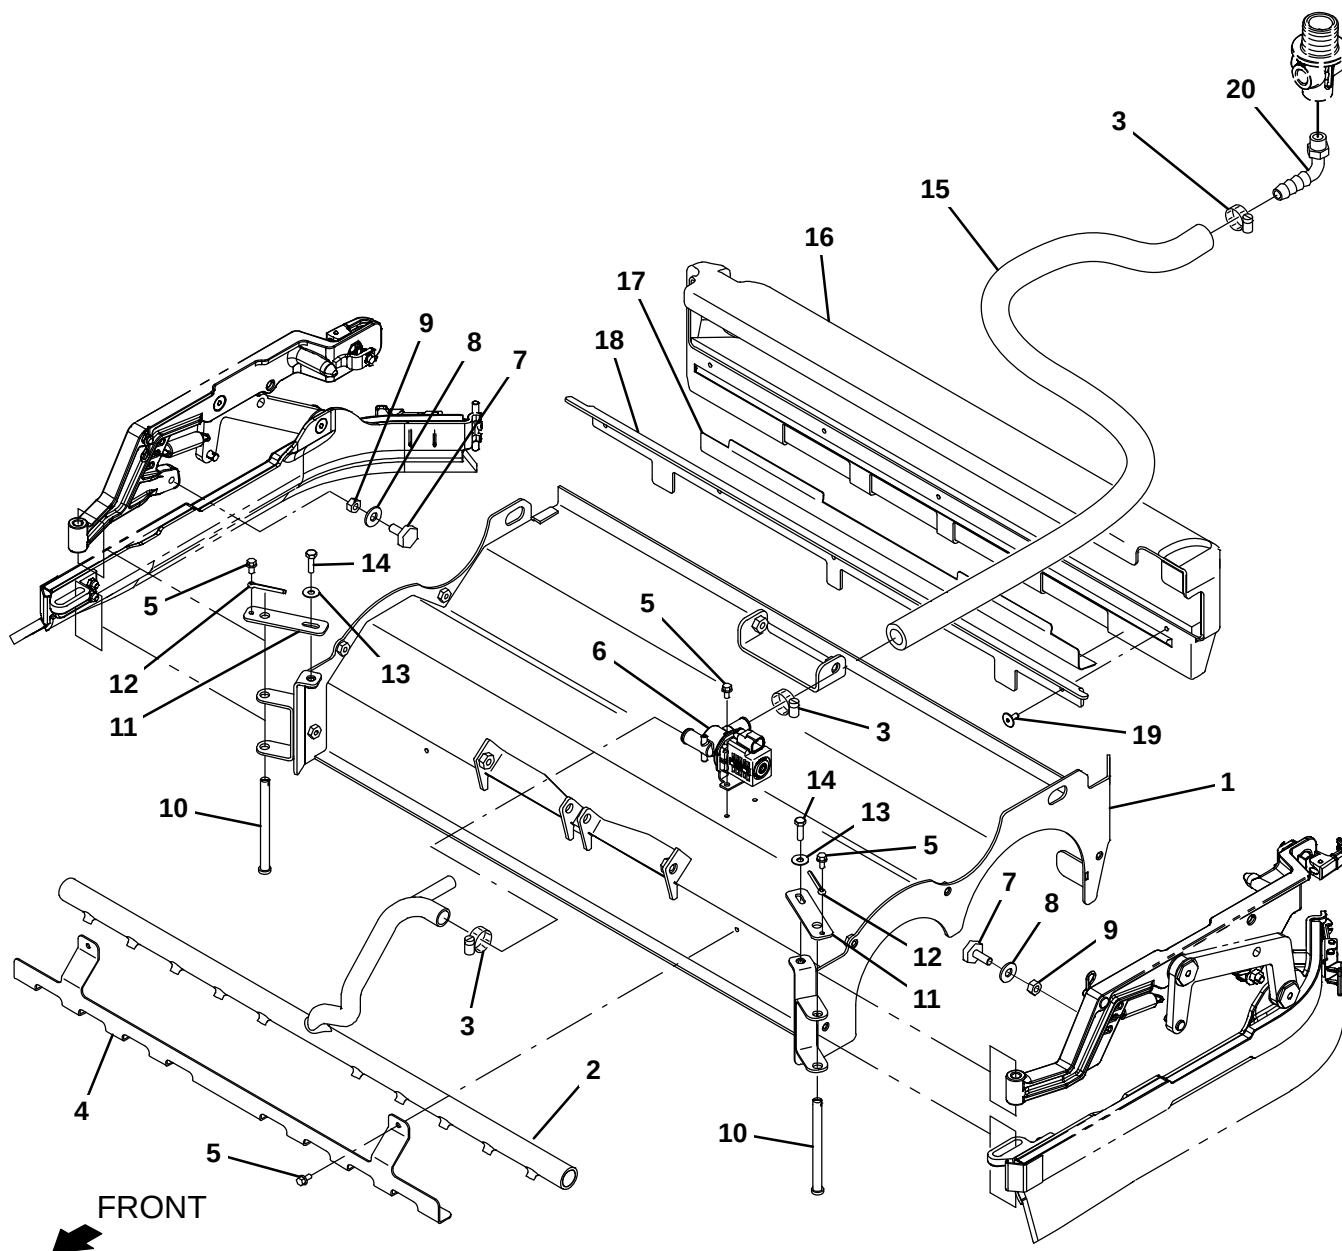


Fig. 13 – Scrub Head Frame Group, Cylindrical

Ref.	Part No.	Serial Number	Description	Qty.	
1	1200292	(10000000-19999999)	Head Wldt, Scb, Cyl	1	
2	1200012	(10000000-19999999)	Tube, Distribution, T12	1	
3	63810	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	3	
4	1201447	(10000000-19999999)	Bracket, Scrbr, Watertube	1	
5	223198	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 10, Fmg	6	
6	1075240	(10000000-19999999)	Valve, Water, Solenoid, 36vdc Bm12/Bm12	1	
7	1204335	(10000000-19999999)	Bumper, Rbr, 1.0 Hex	2	
8	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2	
9	07786	(10000000-19999999)	Nut, Hex, Std, M8 X 1	2	
10	1205975	(10000000-19999999)	Pin, Clevis, 0.37d X 5.00l	2	
11	1202301	(10000000-19999999)	Bracket, Retainer, Pin	2	
12	08236	(10000000-19999999)	Pin, Cotter, .156 X 1.25	2	
13	01684	(10000000-19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	2	
14	08716	(10000000-19999999)	Screw, Hex, M6 X 1.00 X 20, Ss	2	
15	1015026	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.62id, 03ft, Clr	1	
▽	16	9010927	(10000000-19999999)	Debris Tray, Cyl, Afmkt [T12]	1
▲	17	1201574	(10000000-19999999)	Angle, Stl, Perforated .03 1.4 1.4 22l	1
▲	18	1201126	(10000000-19999999)	Lip, Tray, Debris	1
▲	19	32548	(10000000-19999999)	Rivet, Blind, .188d X 0.45 X .62d, Alm	5
	20	630371	(10000000-19999999)	Fitting, Plstc, E90, Bm10/Pm08	1

Fig. 14 – Scrub Head Drive Motor Group, Cylindrical

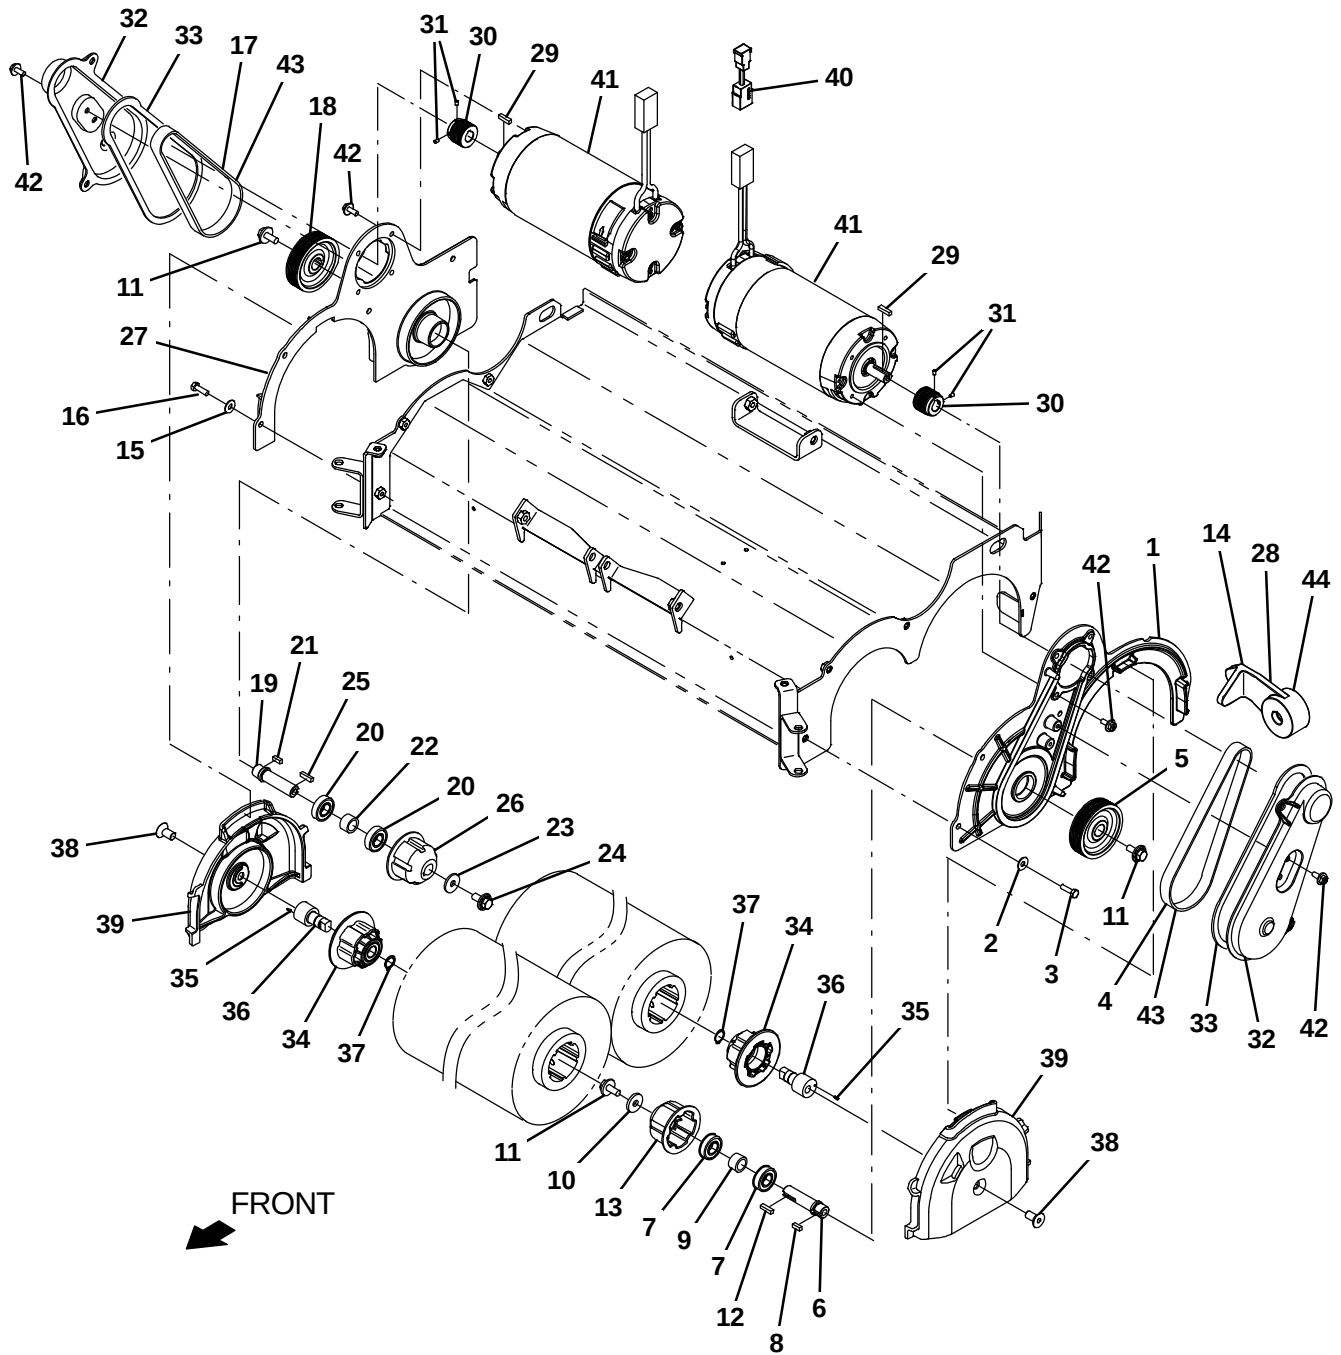


Fig. 14 – Scrub Head Drive Motor Group, Cylindrical

Ref.	Part No.	Serial Number	Description	Qty.
▽		9010939	(10000000–19999999) Side Panel Assy, Cyl, Lh, Afmkt [T12]	1
▲	1	1200900	(10000000–19999999) Plate, Side, Scrubhead, Lh	1
▲	2	01684	(10000000–19999999) Washer, Flat, 0.27b 0.69d .05, Ss	4
▲	3	08716	(10000000–19999999) Screw, Hex, M6 X 1.00 X 20, Ss	4
▲	4	1200334	(10000000–19999999) Belt, Drive	1
▲	5	1200215	(10000000–19999999) Sheave, 07grv, 2.96pd 0.63b [Pj]	1
▲	6	1200281	(10000000–19999999) Shaft, Drive	1
▲	7	41360	(10000000–19999999) Bearing, Ball, 0.59b 1.26d 0.35w[2seal]	2
▲	8	00961	(10000000–19999999) Key, Sq, 0.19 X 0.19, 0.50l	1
▲	9	1002077	(10000000–19999999) Tube, 0.59id 0.81od 00.5l	1
▲	10	41186	(10000000–19999999) Washer, Flat, Belleville, .31	1
▲	11	1020341	(10000000–19999999) Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
▲	12	00911	(10000000–19999999) Key, Sq, 0.19 X 0.19, 0.75l	1
▲	13	378805	(10000000–19999999) Plug, Drive, Brush, Mach	1
▲	14	1203758	(10000000–19999999) Tool, Installation, Belt	1
▽		9010940	(10000000–19999999) Side Panel Assy, Cyl, Rh, Afmkt [T12]	1
▲	15	01684	(10000000–19999999) Washer, Flat, 0.27b 0.69d .05, Ss	4
▲	16	08716	(10000000–19999999) Screw, Hex, M6 X 1.00 X 20, Ss	4
▲	17	1200334	(10000000–19999999) Belt, Drive	1
▲	18	1200215	(10000000–19999999) Sheave, 07grv, 2.96pd 0.63b [Pj]	1
▲	19	1200281	(10000000–19999999) Shaft, Drive	1
▲	20	41360	(10000000–19999999) Bearing, Ball, 0.59b 1.26d 0.35w[2seal]	2
▲	21	00961	(10000000–19999999) Key, Sq, 0.19 X 0.19, 0.50l	1
▲	22	1002077	(10000000–19999999) Tube, 0.59id 0.81od 00.5l	1
▲	23	41186	(10000000–19999999) Washer, Flat, Belleville, .31	1
▲	24	1020341	(10000000–19999999) Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
▲	25	00911	(10000000–19999999) Key, Sq, 0.19 X 0.19, 0.75l	1
▲	26	378805	(10000000–19999999) Plug, Drive, Brush, Mach	1
▲	27	1200898	(10000000–19999999) Plate, Side, Scrubhead, Rh	1
▲	28	1203758	(10000000–19999999) Tool, Installation, Belt	1
	29	1014328	(10000000–19999999) Key, Sq, 05mm X 05mm, 25mml	2
	30	1054581	(10000000–19999999) Sheave, 07grv, 1.22pd 0.55b [Pj]	2
	31	222818	(10000000–19999999) Screw, Set, Soc, 08–32 X 0.25, NI	4
	32	1200283	(10000000–19999999) Cover, Belt	2
	33	1201341	(10000000–19999999) Gasket, Cover, Belt	1
▽		222752	(10000000–19999999) Plug Assy, Idler, Brush	2
▲	34	1057629	(10000000–19999999) Plug, Idler, Brush [Sgl Brg]	1
▲	35	222184	(10000000–19999999) Pin, Roll, .094d X 0.25l, .094/.097	1
▲	36	222177	(10000000–19999999) Shaft, Plug, Idler	1
▲	37	01516	(10000000–19999999) Ring, Retaining, Ext, 0.59d, Basic	1
	38	390996	(10000000–19999999) Screw, Flt, Soc, M10 X 1.50 X 20,10.9,NI	2
	39	1200309	(10000000–19999999) Door, Brush	2
	40	1059170	(10000000–19999999) Harness, Wire, Adapter [Deutsch, Dtp]	1
	41	1053342	(10000000–19999999) Motor, Ele, 36vdc 1750rpm 1.00hp 22.0a (See Breakdown)	2
	42	1034731	(10000000–19999999) Screw, Hex, M6 X 1.00 X 16, Ss, Sems	12
▽		9010935	(10000000–19999999) Belt, Cyl Head, W/Too;l, Afmkt	1
▲	43	1200334	(10000000–19999999) Belt, Drive	2
▲	44	1203758	(10000000–19999999) Tool, Installation, Belt	1

Fig. 15 – Scrub Head Side Squeegee Group, Right Hand

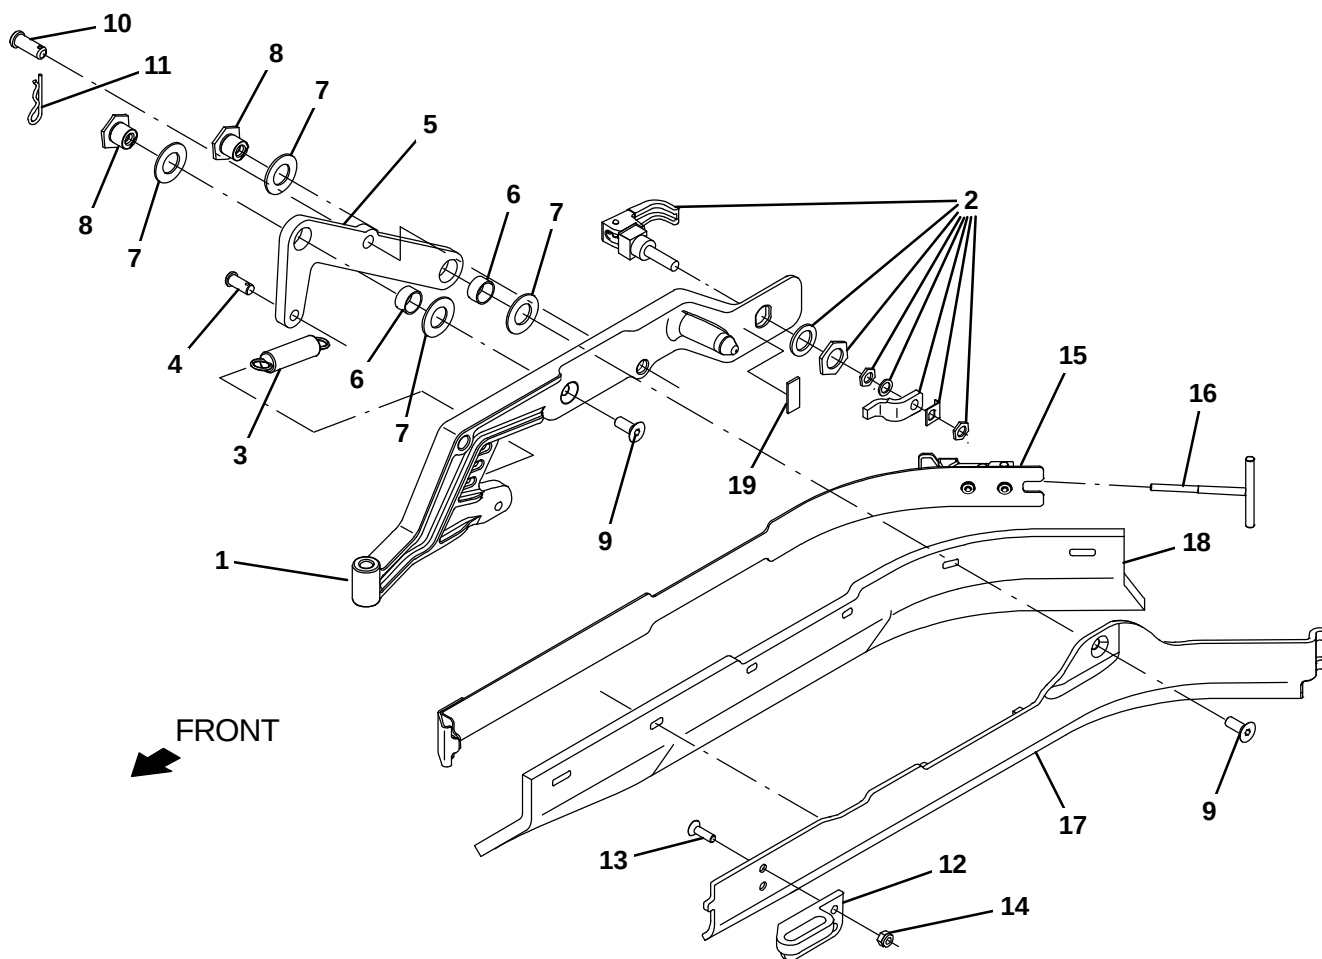


Fig. 15 – Scrub Head Side Squeegee Group, Right Hand

Ref.	Part No.	Serial Number	Description	Qty.
1	1202243	(10000000-19999999)	Door, Casting, Squeegee, Rh	1
2	1065134	(10000000-19999999)	Latch, Cmpr, Yel Grip	1
3	363469	(10000000-19999999)	Spring, Extn, 0.75od 0.10wir 03.0l	1
4	46800	(10000000-19999999)	Pin, Clevis, 0.31D X 0.75L	1
5	1202100	(10000000-19999999)	Bellcrank, Lift, Sqge [T12]	1
6	71607	(10000000-19999999)	Bushing, Sleeve, 0.63b 0.72d 0.38l	2
7	64425	(10000000-19999999)	Washer, Thrust, 0.61b 1.25d .06, Fgl	4
8	1200525	(10000000-19999999)	Nut, T, M8 X 1.25	2
9	79246	(10000000-19999999)	Screw, Flt, Soc, M8 X 1.25 X 20, 18-8,Ss	2
10	09088	(10000000-19999999)	Pin, Clevis, 0.37d X 1.00l	1
11	44906	(10000000-19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	1
12	1243722	(10000000-19999999)	Block, Sqge, Guide, Rh	1
13	1016421	(10000000-19999999)	Screw, Flt, M6 X 1.0 X 20, Ss	2
14	08708	(10000000-19999999)	Nut, Hex, Lock, M6 X 1.00, NI	2
15	1201453	(10000000-19999999)	Strap Wldt, Sqge	1
16	1054312	(10000000-19999999)	Hook Wldt, Latch	1
17	1200221	(10000000-19999999)	Frame, Sqge, Side, Rh	1
18	1200430	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Linatex (Standard)	1
18	1202159	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Urethane (Option)	1
18	1202160	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Gum (Option)	1
19	1243007	(10000000-19999999)	Gasket, Cushion, Side Squeegee Door	1

Fig. 16 – Scrub Head Side Squeegee Group, Left Hand

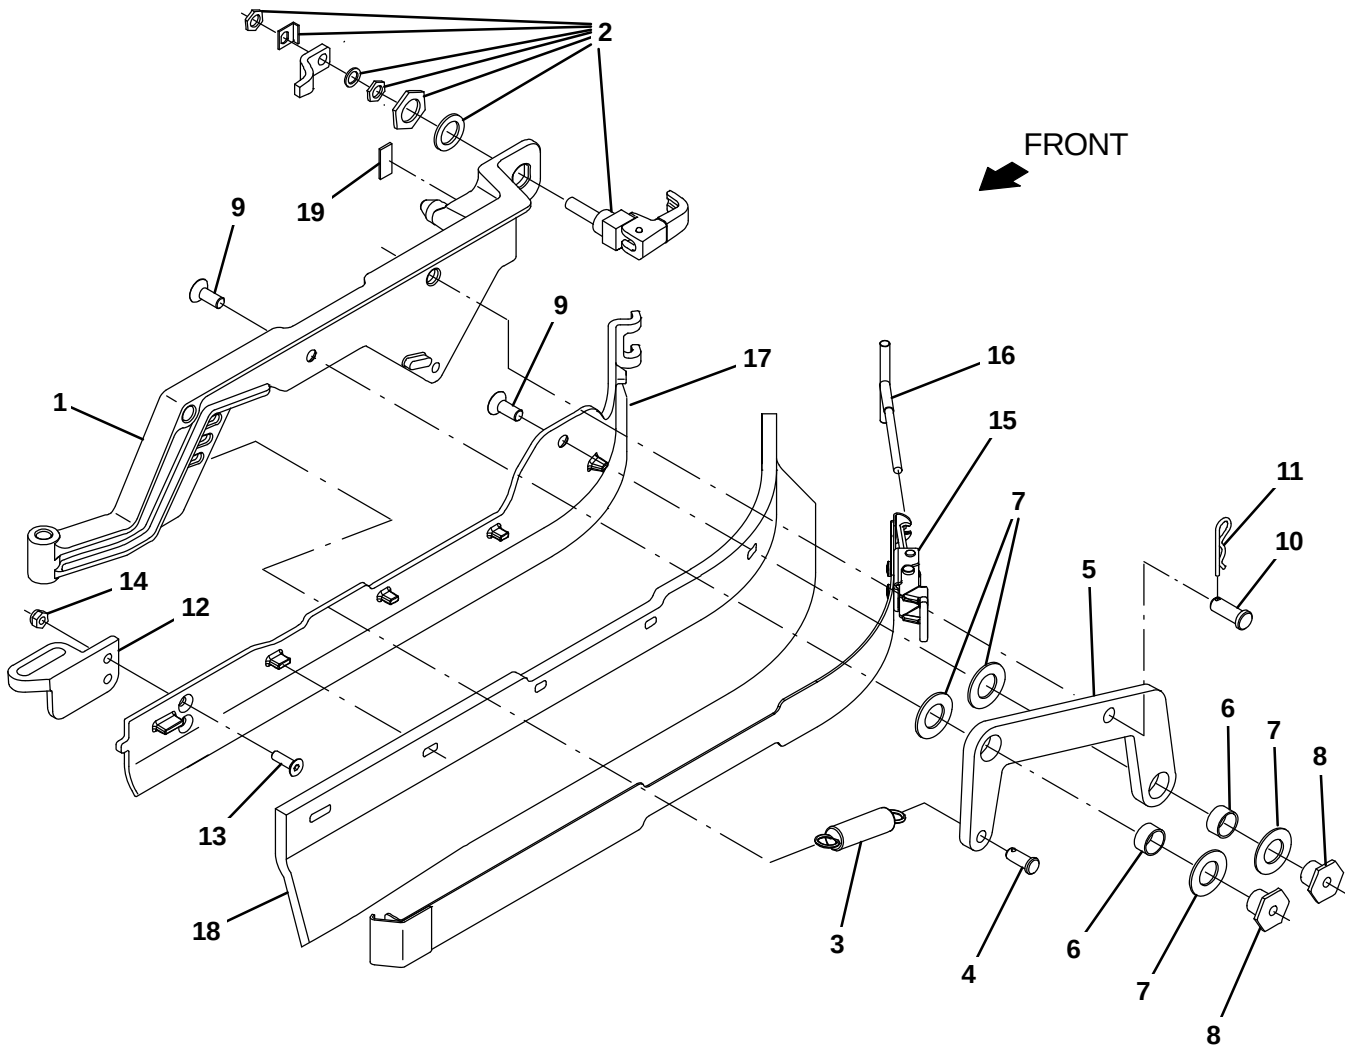


Fig. 16 – Scrub Head Side Squeegee Group, Left Hand

Ref.	Part No.	Serial Number	Description	Qty.
1	1202221	(10000000-19999999)	Door, Casting, Squeegee, Lh	1
2	1065134	(10000000-19999999)	Latch, Cmpr, Yel Grip	1
3	363469	(10000000-19999999)	Spring, Extn, 0.75od 0.10wir 03.0l	1
4	46800	(10000000-19999999)	Pin, Clevis, 0.31D X 0.75L	1
5	1200213	(10000000-19999999)	Bellcrank, Lift, Sqge [T12]	1
6	71607	(10000000-19999999)	Bushing, Sleeve, 0.63b 0.72d 0.38l	2
7	64425	(10000000-19999999)	Washer, Thrust, 0.61b 1.25d .06, Fgl	4
8	1200525	(10000000-19999999)	Nut, T, M8 X 1.25	2
9	79246	(10000000-19999999)	Screw, Flt, Soc, M8 X 1.25 X 20, 18-8,Ss	2
10	09088	(10000000-19999999)	Pin, Clevis, 0.37d X 1.00l	1
11	44906	(10000000-19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	1
12	1243718	(10000000-19999999)	Block, Guide, Sqge	1
13	1016421	(10000000-19999999)	Screw, Flt, M6 X 1.0 X 20, Ss	2
14	08708	(10000000-19999999)	Nut, Hex, Lock, M6 X 1.00, NI	2
15	1201453	(10000000-19999999)	Strap Wldt, Sqge	1
16	1054312	(10000000-19999999)	Hook Wldt, Latch	1
17	1200011	(10000000-19999999)	Frame, Sqge, Side, Lh	1
18	1200430	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Linatex (Standard)	1
18	1202159	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Urethane (Option)	1
18	1202160	(10000000-19999999)	Blade, Sqge, Side, 22.50l, Gum (Option)	1
19	1243007	(10000000-19999999)	Gasket, Cushion, Side Squeegee Door	1

Fig. 17 – Recovery Tank Group

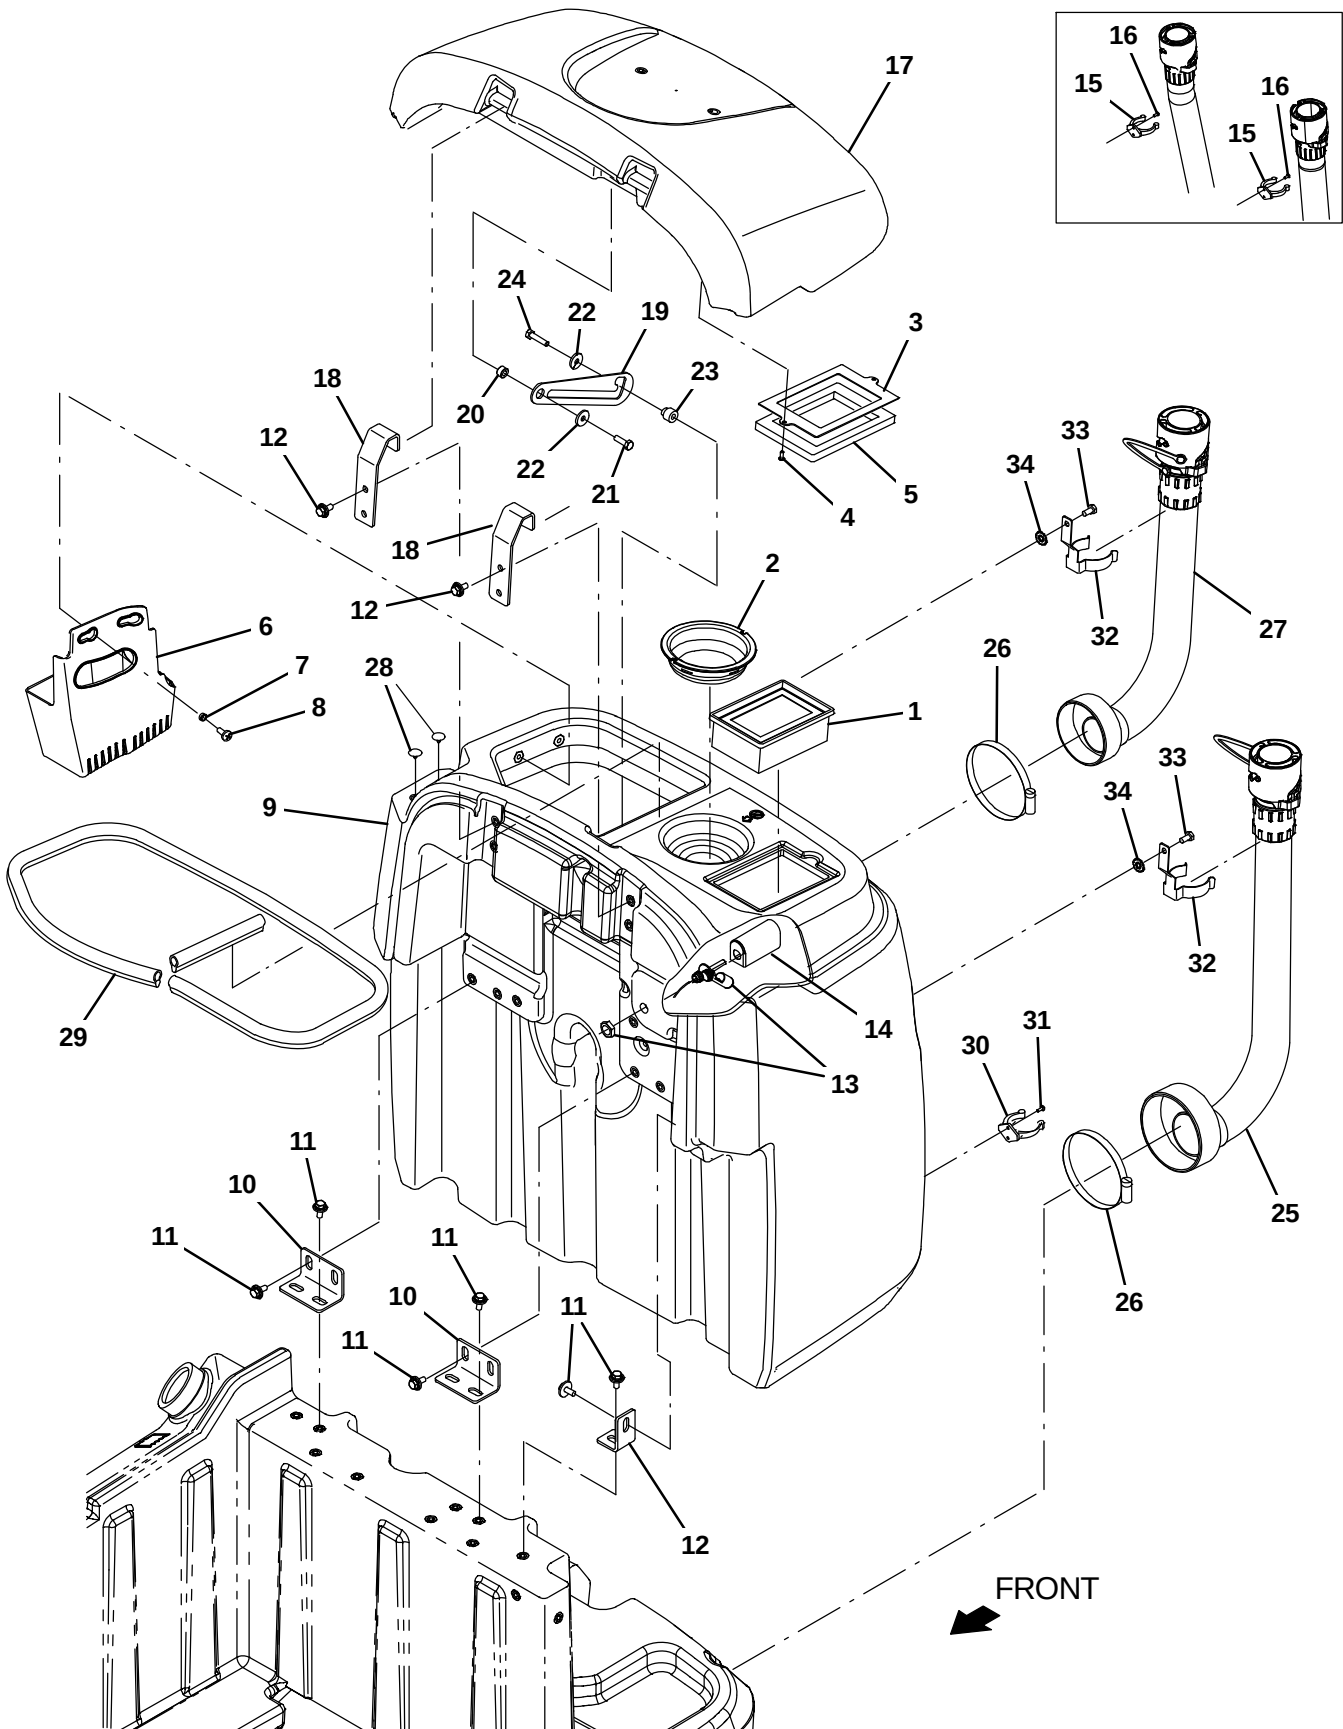


Fig. 17 – Recovery Tank Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1037821	(10000000–19999999)	Filter, Panl, Dust, 2.3 X 04.5 X 06.4	1
2	1026014	(10000000–19999999)	Screen, Vacuum	1
3	1201157	(10000000–19999999)	Plate, Mtg, Gasket	1
4	140825	(10000000–19999999)	Screw, Pan, Phl, 06 X 0.50, Fmg/Ab, Blk	2
5	1016392	(10000000–19999999)	Gasket, Ure, .50, 03.74w 05.31l, Adh	1
6	1201340	(10000000–19999999)	Tray, Debris	1
7	1066720	(10000000–19999999)	Sleeve, P/M, 0.32b 0.44d 0.2l [430ss]	2
8	09737	(10000000–19999999)	Screw, Pan, Phl, M8 X 1.25 X 20, 4.8	2
9	9010920	(10000000–19999999)	Recovery Tank, Afmkt [T12]	1
9	9011173	(10000000–19999999)	Recovery Tank, Afmkt, Jp [T12]	1
10	1200458	(10000000–19999999)	Bracket, Mtg, Tank	3
11	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	18
12	1054823	(10000000–19999999)	Angle, Mtg, Tank	1
13	385685	(10000000–19999999)	Sensor, Level, Liq, 14vdc 01a .62–11	1
14	1019285	(10000000–19999999)	Bracket, Protector, Float Switch	1
15	1200746	(10000000–10872535)	Clip, Hose, Plstc 1.88–2.12	2
16	49697	(10000000–10872535)	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	4
17	9010921	(10000000–19999999)	Cover, Recovery Tank, Afmkt [T12]	1
18	1200519	(10000000–19999999)	Bracket, Mtg, Cover	2
19	1057214	(10000000–19999999)	Plate, Arm, Prop	1
20	360460	(10000000–19999999)	Sleeve, P/M, 0.34b 0.63d 0.4l, Ss / Oil	1
21	12333	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, Ss, NI	1
22	1017218	(10000000–19999999)	Washer, Flat, 0.32b 1.00d .12, Ss	2
23	230735	(10000000–19999999)	Sleeve, P/M, Flng, 0.33b 0.75/0.50d 0.8l	1
24	59658	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 35, NI, Ss	1
25	9013951	(10000000–10872535)	Hose Kit, Mtg, Brkt T12 (819.0) (Solution Tank)	1
25	1216347	(10872536–19999999)	Hose Assy, Drain. 2.0ID x 32.2L, Blk (Solution Tank)	1
26	1201434	(10000000–19999999)	Clamp, Hose, Wormdrive, 4.63–5.50, 0.5w	2
27	9013950	(10000000–10872535)	Hose kit, Mtg, Brk, T12 (665.5) (Recovery Tank)	1
27	1216370	(10872536–19999999)	Hose Assy, Drain, 2.0ld X 26.2L, Blk (Recovery Tank)	1
28	1066063	(10000000–19999999)	Plug, Hole, Rnd, 0.25H 0.43L, Brb, Nyl	4
29	1066433	(10000000–19999999)	Seal, Afmkt, Bulb, Dual, 08ft [F/.30gap]	1
30	1200746	(10000000–19999999)	Clip, Hose, Plstc 1.88–2.12	1
31	49697	(10000000–19999999)	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	2
32	1213730	(10872536–19999999)	Bracket, Mtg, Hose	2
33	15675	(10872536–19999999)	Screw, Hex, M8 X 1.25 X 16, Ss	2
34	41141	(10872536–19999999)	Washer, Lock, Int–Ext, 0.31	2

Fig. 18 – Vacuum Fan Group

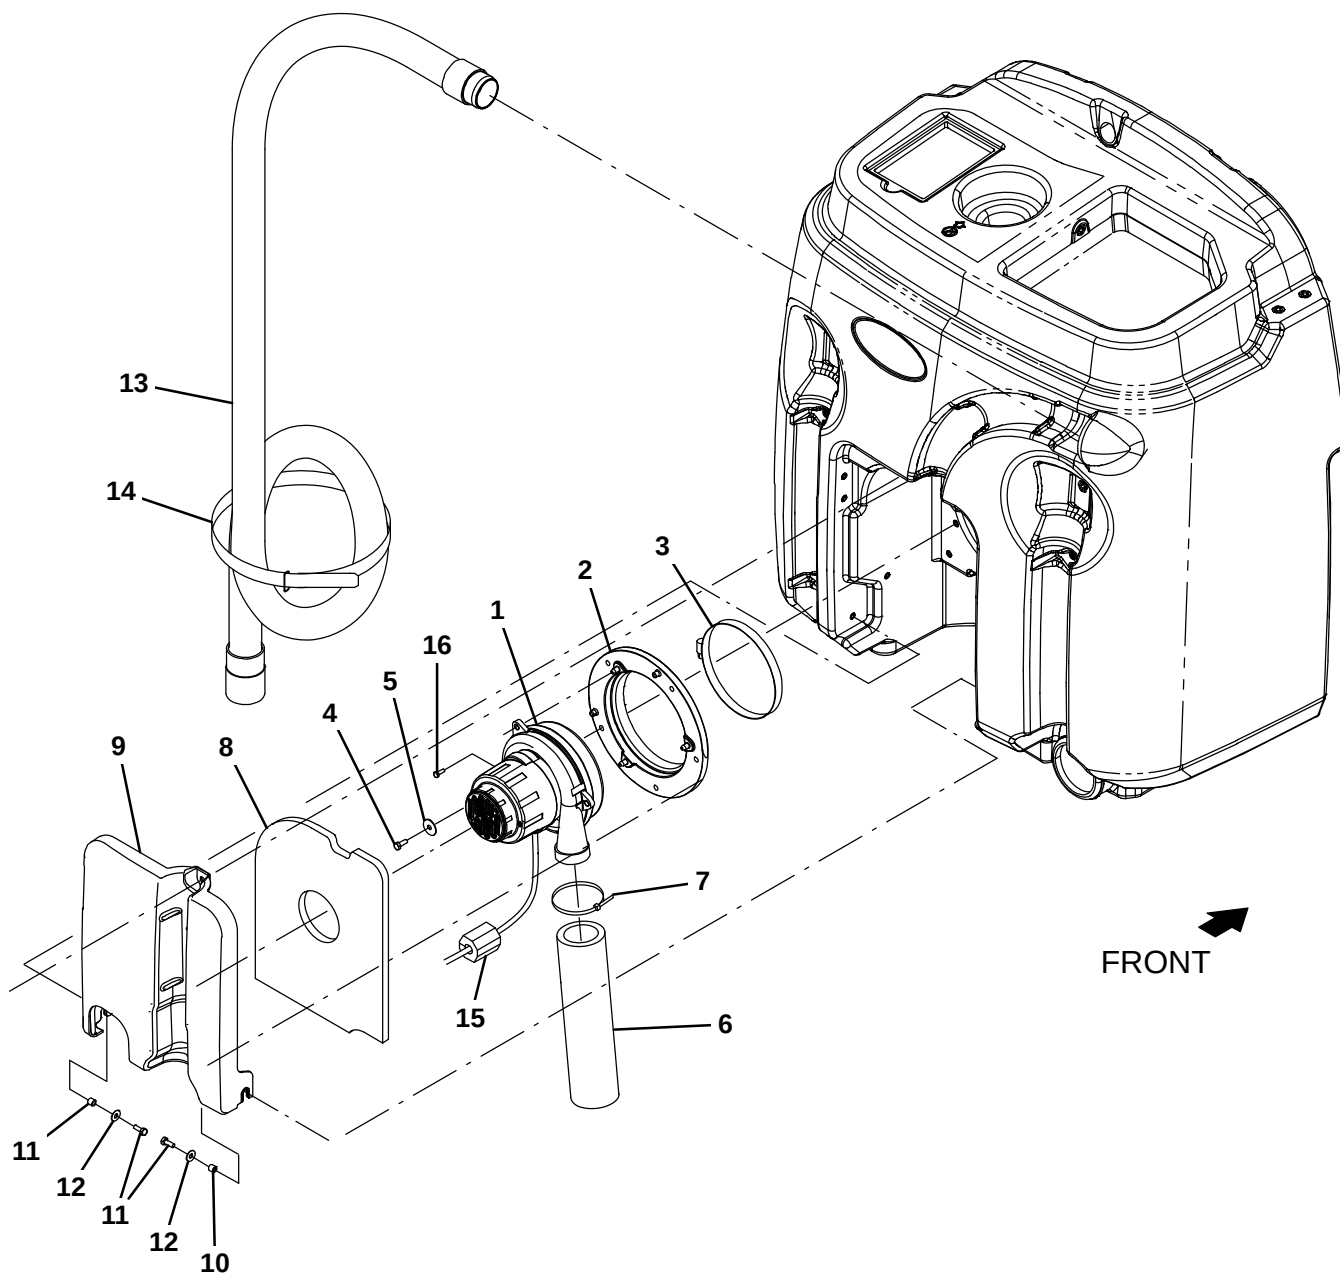


Fig. 18 – Vacuum Fan Group

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1200149	(10000000–19999999)	Fan, Vac, 6.6 Dia, Ametek	1
▲		1206774	(10000000–19999999)	Brush Kit, Motor, Fan	1
	2	1201267	(10000000–19999999)	Assy, Seal, Mtg, Vacfan	1
	3	49891	(10000000–19999999)	Clamp, Hose, Wormdrive, 5.56–6.50d, .56w	1
	4	08716	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 20, Ss	5
	5	29570	(10000000–19999999)	Washer, Flat, 0.28b 1.00d .06, Stl	5
	6	1203848	(10000000–19999999)	Muffler, Vacfan, 11.0 L	1
	7	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1
	8	1200369	(10000000–19999999)	Insulation, Acstc, 0.5, 10.4 X 13.0 C–0	1
	9	1200649	(10000000–19999999)	Cover, Fan, Vacuum	1
	10	140154	(10000000–19999999)	Sleeve, P/M, 0.25b 0.38d 0.3l, Pl	2
	11	15678	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 16, Ss	2
	12	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	2
	13	1201875	(10000000–19999999)	Hose, Vacuum, 1.75id X 68.6l, 2 Cuff	1
	14	1067964	(10000000–19999999)	Fastener, 25.0 [Hook & Loop]	1
	15	1052126	(10000000–19999999)	Inductor, 12.7Mmid [156 Imp At 25Mz] (Australia Only)	1
	16	16944	(10000000–19999999)	Screw, hex, m4 X 0.70 X 10, Fmg	1

Fig. 19 – Solution Tank Group

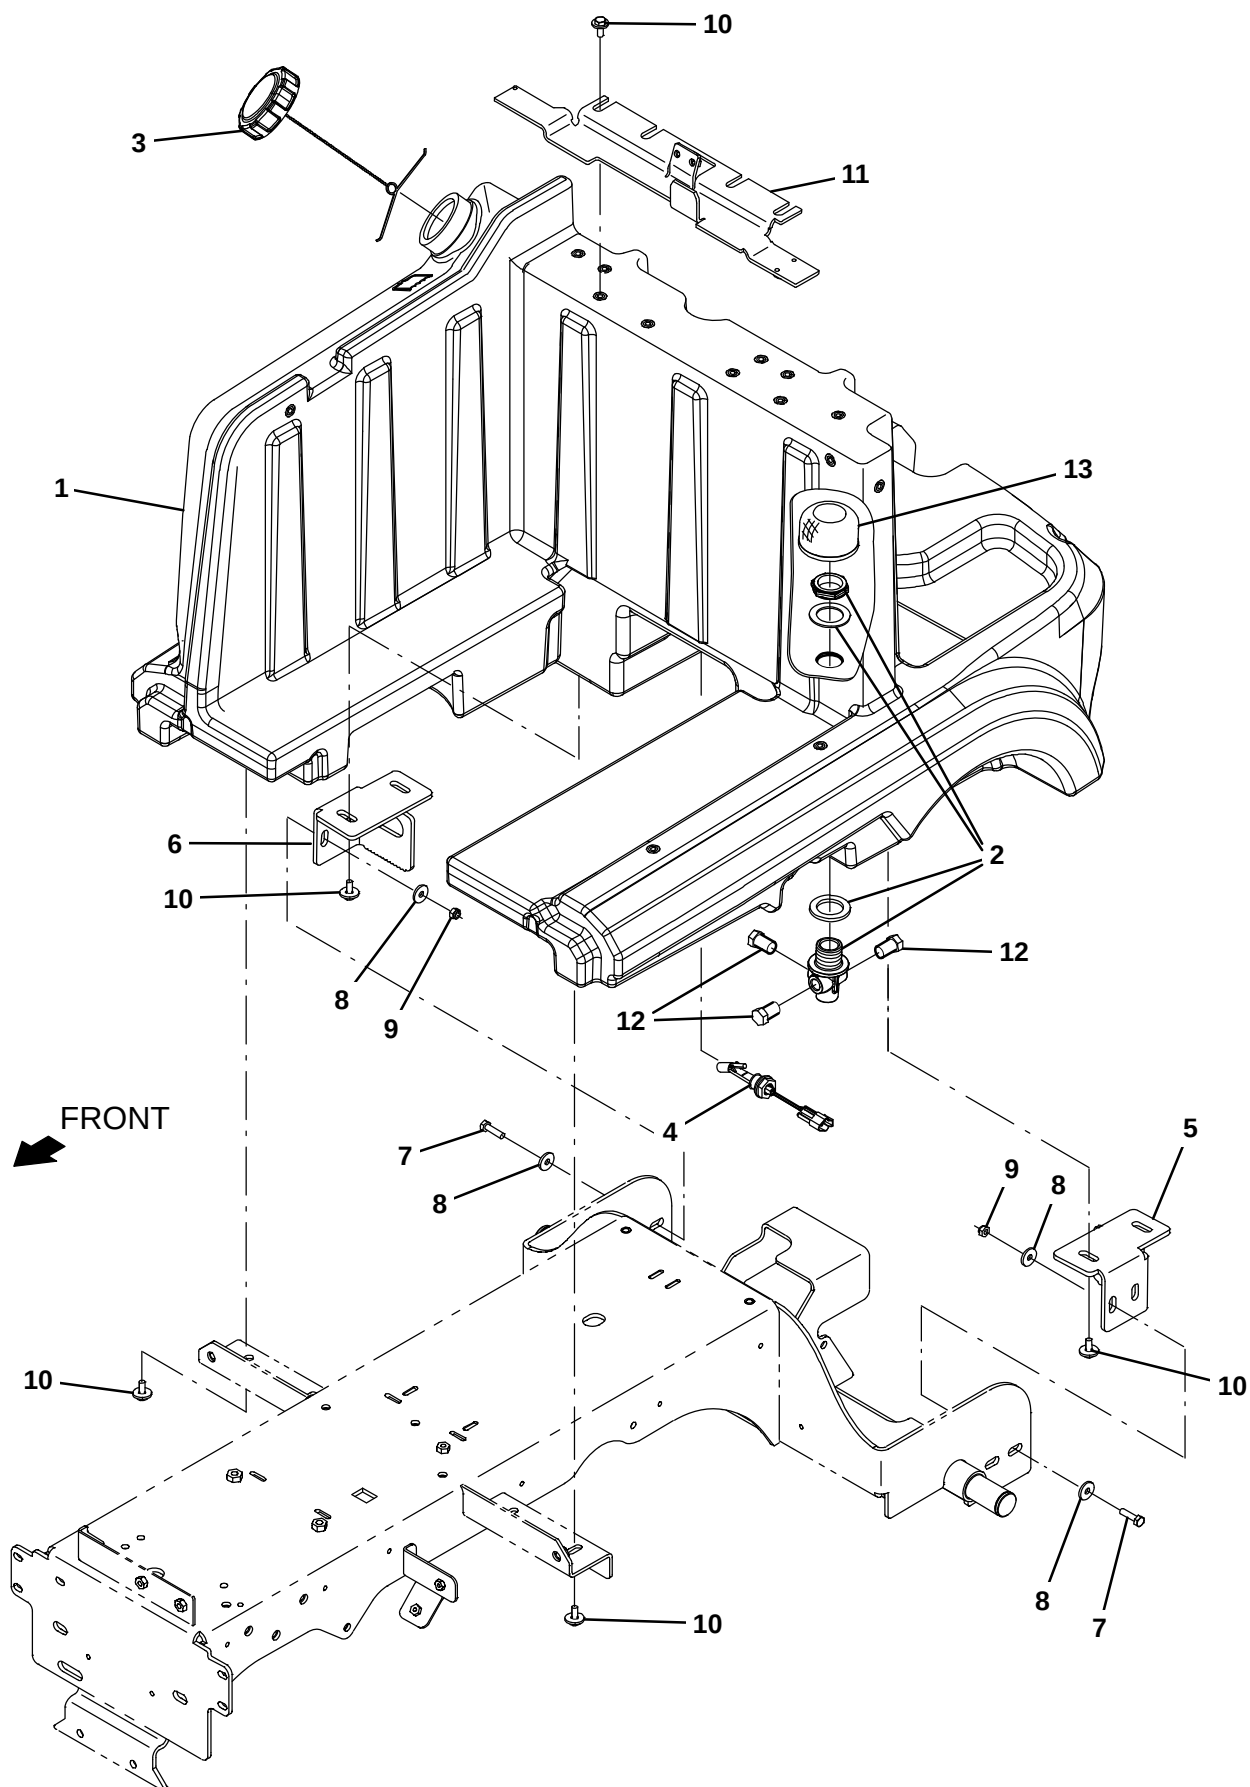


Fig. 19 – Solution Tank Group

Ref.	Part No.	Serial Number	Description	Qty.
1	9010919	(10000000–19999999)	Solution Tank, Afmkt [T12]	1
2	1059317	(10000000–19999999)	Fitting Assy, Soltn, Bh	1
3	1011885	(10000000–19999999)	Cap, Tank	1
4	1201588	(10000000–19999999)	Sensor, Level, Liq, 30watt, Spst	1
5	1201077	(10000000–19999999)	Bracket, Sppt, Tank, Lh	1
6	1201079	(10000000–19999999)	Bracket, Sppt, Tank, Rh	1
7	12317	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 30, Ss	4
8	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	8
9	08714	(10000000–19999999)	Nut, Hex, Lock, M10 X 1.5, NI, Ss	4
10	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	12
11	1205727	(10000000–19999999)	Bracket Wldt, Sppt, Seat	1
12	630146	(10000000–19999999)	Fitting, Plug, Pm06, Nyl	3
13	1027290	(10000000–19999999)	Filter, Soltn, 020Mesh, Pm12 3.1D 02.6L	1

Fig. 20 – Rear Squeegee Lift Group

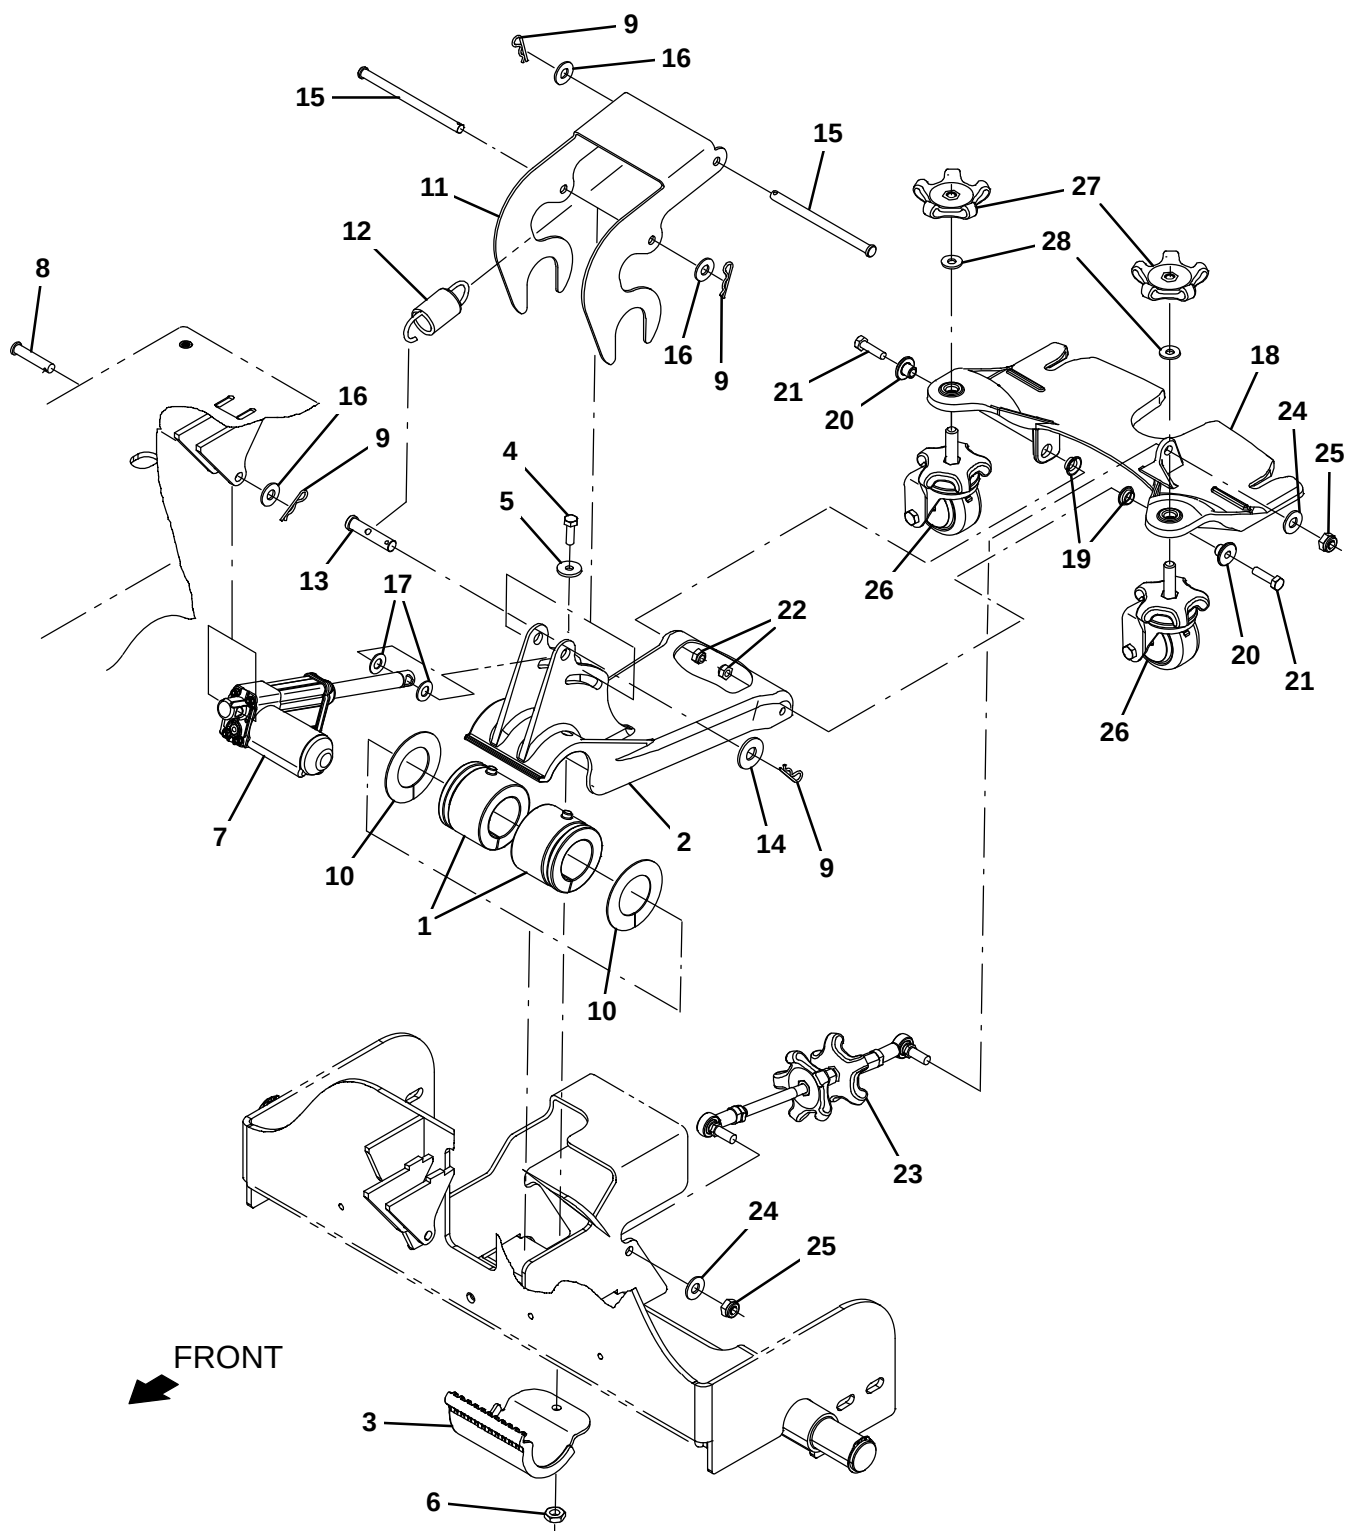


Fig. 20 – Rear Squeegee Lift Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1053815	(10000000–19999999)	Bushing, Flex, Ure	2
2	1053870	(10000000–19999999)	Arm, Lift, Sqge	1
3	1053814	(10000000–19999999)	Clamp, Pivot, Link	1
4	09010	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, Ss	1
5	1017218	(10000000–19999999)	Washer, Flat, 0.32b 1.00d .12, Ss	1
6	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	3
7	1201489	(10000000–19999999)	Actuator, 36vdc, 02.0strk, 0180lb	1
8	94877	(10000000–19999999)	Pin, Clevis, 10mmd X	1
9	44906	(10000000–19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	4
10	1059969	(10000000–19999999)	Washer, Thrust, 1.81b 2.93d .06w, Plstc	2
11	1059316	(10000000–19999999)	Link, Tensioner, Spring	1
12	1201370	(10000000–19999999)	Spring, Extn, 1.26od 0.162wir 03.3l	1
13	1059498	(10000000–19999999)	Pin, Clevis, 0.50d X 2.25l	1
14	32493	(10000000–19999999)	Washer, Flat, 0.50, Std	1
15	1059338	(10000000–19999999)	Pin, Clevis, 0.37d X 5.25l	2
16	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	5
17	1018151	(10000000–19999999)	Washer, Flat, 0.44b 0.88d .06, Nyl	2
18	1204957	(10000000–19999999)	Coupling, Sqge	1
19	1054662	(10000000–19999999)	Bushing, Flng, 0.50b 0.59d 0.25l	2
20	1059990	(10000000–19999999)	Sleeve, Flng, 0.32b 1.00/0.50d 0.6l, Ss	2
21	09011	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	2
22	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
23	9010937	(10000000–19999999)	Turnbuckle Replmt, Afmkt [T12]	1
24	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	2
25	08714	(10000000–19999999)	Nut, Hex, Lock, M10 X 1.5, NI, Ss	2
26	1205850	(10000000–19999999)	Caster Assy, Swivel	2
27	1055516	(10000000–19999999)	Knob Assy, Star, 3.21d 5ear M12	2
28	578430	(10000000–19999999)	Washer, Flat, 0.50d, PI [Spring-Disc]	2

Fig. 21 – Rear Squeegee Kit

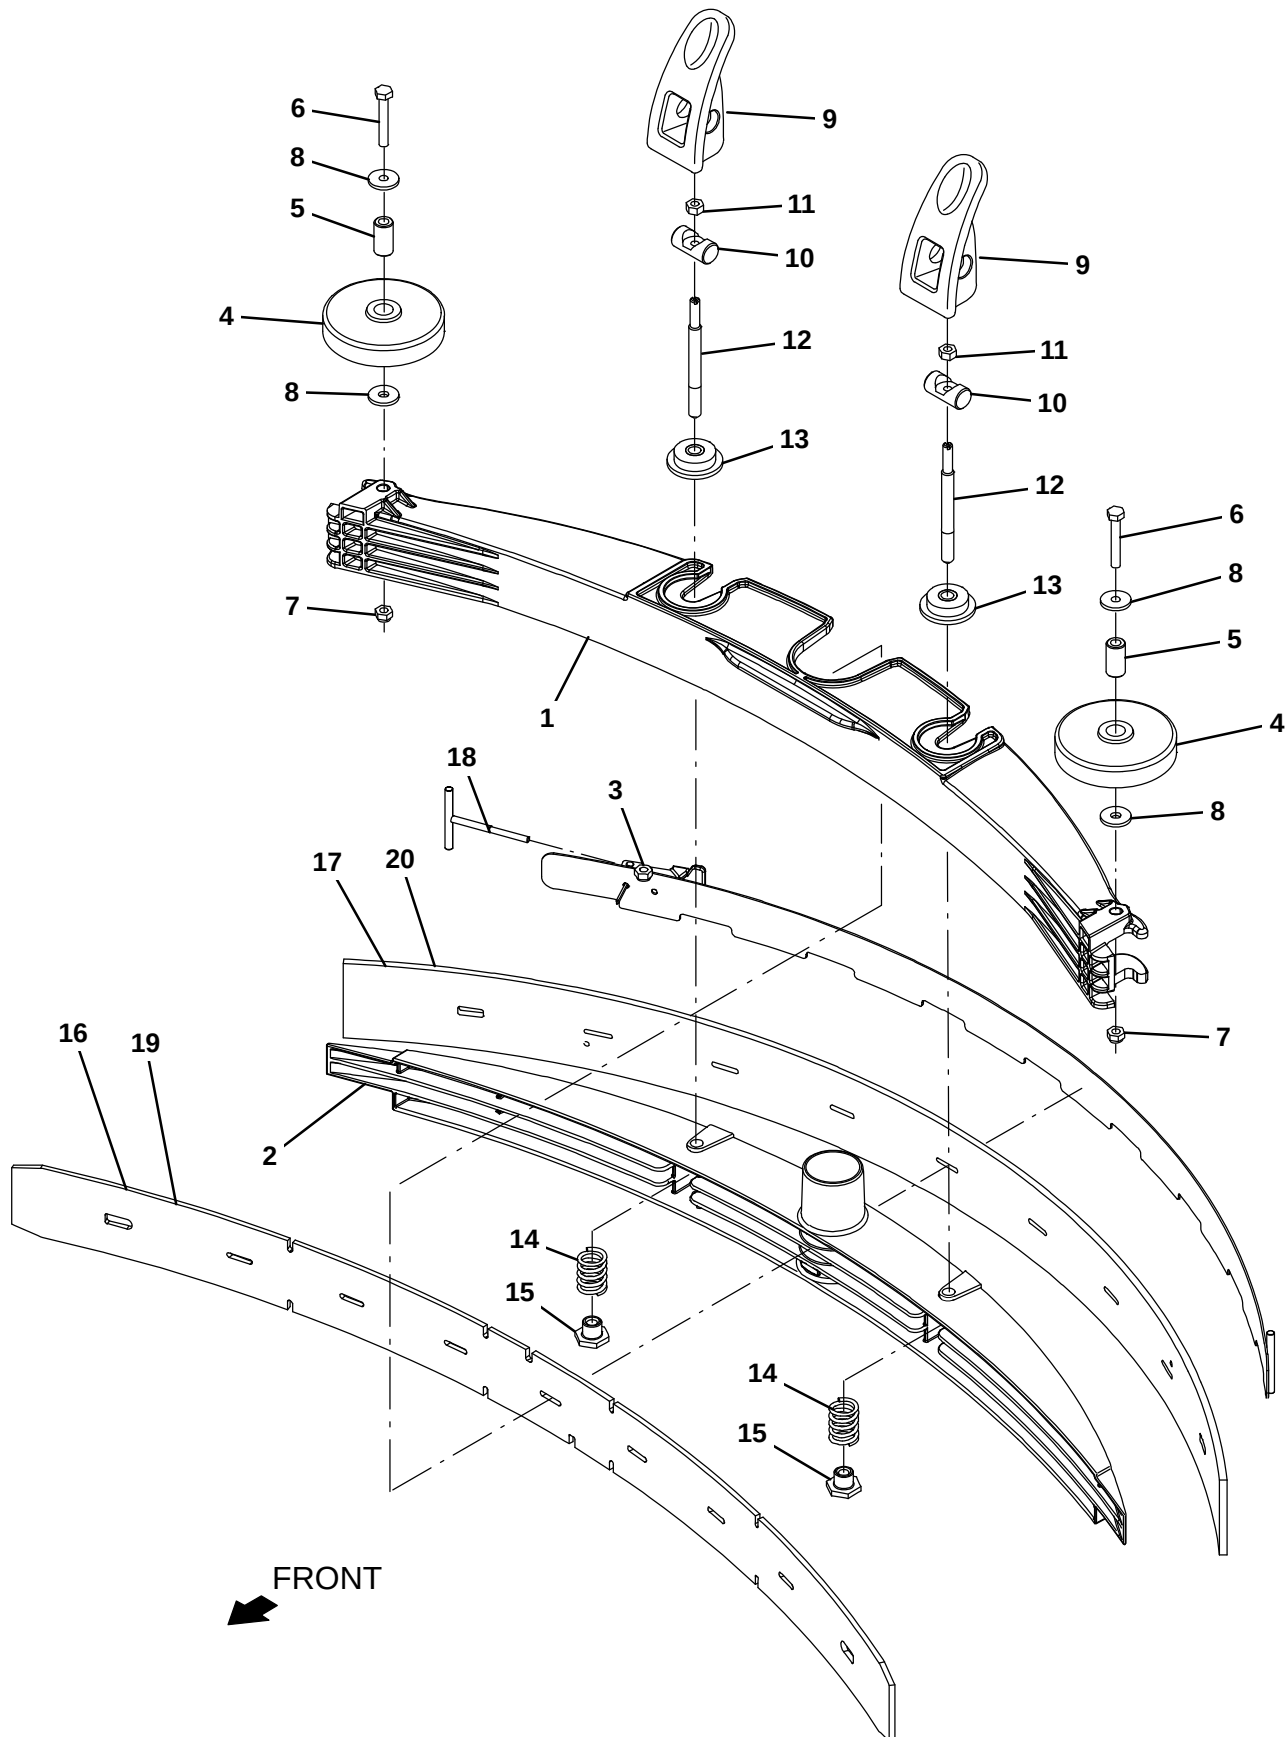


Fig. 21 – Rear Squeegee Kit

Ref.	Part No.	Serial Number	Description	Qty.
▽	9009817	(10000000–19999999)	Squeegee Kit, Rear, Ci [T12]	1
▲	1 1200219	(10000000–19999999)	Frame, Sqge, Outer	1
▲	2 1200218	(10000000–19999999)	Frame, Sqge, Inner	1
▲	3 1200466	(10000000–19999999)	Clamp Wldt, Retainer, Sqge	1
▲	4 363162	(10000000–19999999)	Wheel, 04.0d 0.89w 0.64b	2
▲	5 363301	(10000000–19999999)	Sleeve, P/M, 0.34b 0.63d 1.2l, Bnz	2
▲	6 49694	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 50, Ss	2
▲	7 08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
▲	8 1017218	(10000000–19999999)	Washer, Flat, 0.32b 1.00d .12, Ss	4
▲	9 1052532	(10000000–19999999)	Grip, Lock	2
▲	10 1055396	(10000000–19999999)	Pin, 0.63d, 02.0l [W/Cbore, M8 Screw]	2
▲	11 07786	(10000000–19999999)	Nut, Hex, Std, M8 X 1	2
▲	12 1057407	(10000000–19999999)	Rod, Thrld, 2end, M8x1.25/ M10x1.5 04.7l	2
▲	13 1055506	(10000000–19999999)	Ring, Mtg, Sqge, .38l	2
▲	14 1064770	(10000000–19999999)	Spring, Cmpr, 0.98od .13wir 01.3l, Ss	2
▲	15 391345	(10000000–19999999)	Nut, T, M10 X 1.50 X 0.62od X 0.5l	2
▲	16 1200383	(10000000–19999999)	Blade, Sqge, Front, 42.59l [Linard]	1
▲	17 1200384	(10000000–19999999)	Blade, Sqge, Rear, 44.96l Linatex	1
▲	18 1054312	(10000000–19999999)	Hook Wldt, Latch	
	19 1201825	(10000000–19999999)	Blade, Sqge, Front, 42.59L [Gum] (Option)	1
	19 1201823	(10000000–19999999)	Blade, Sqge, Front, 42.59l [Urethane] (Option)	1
	19 1212213	(10000000–19999999)	Blade, Sqge, Front, Tile, Tile, 42.59L [Linard} (Option)	1
	20 1201826	(10000000–19999999)	Blade, Sqge, Rear, 44.96l Gum (Option)	1
	20 1201824	(10000000–19999999)	Blade, Sqge, Rear, 44.96l Urethane (Option)	1

Fig. 22 – Electrical Circuit Board Group

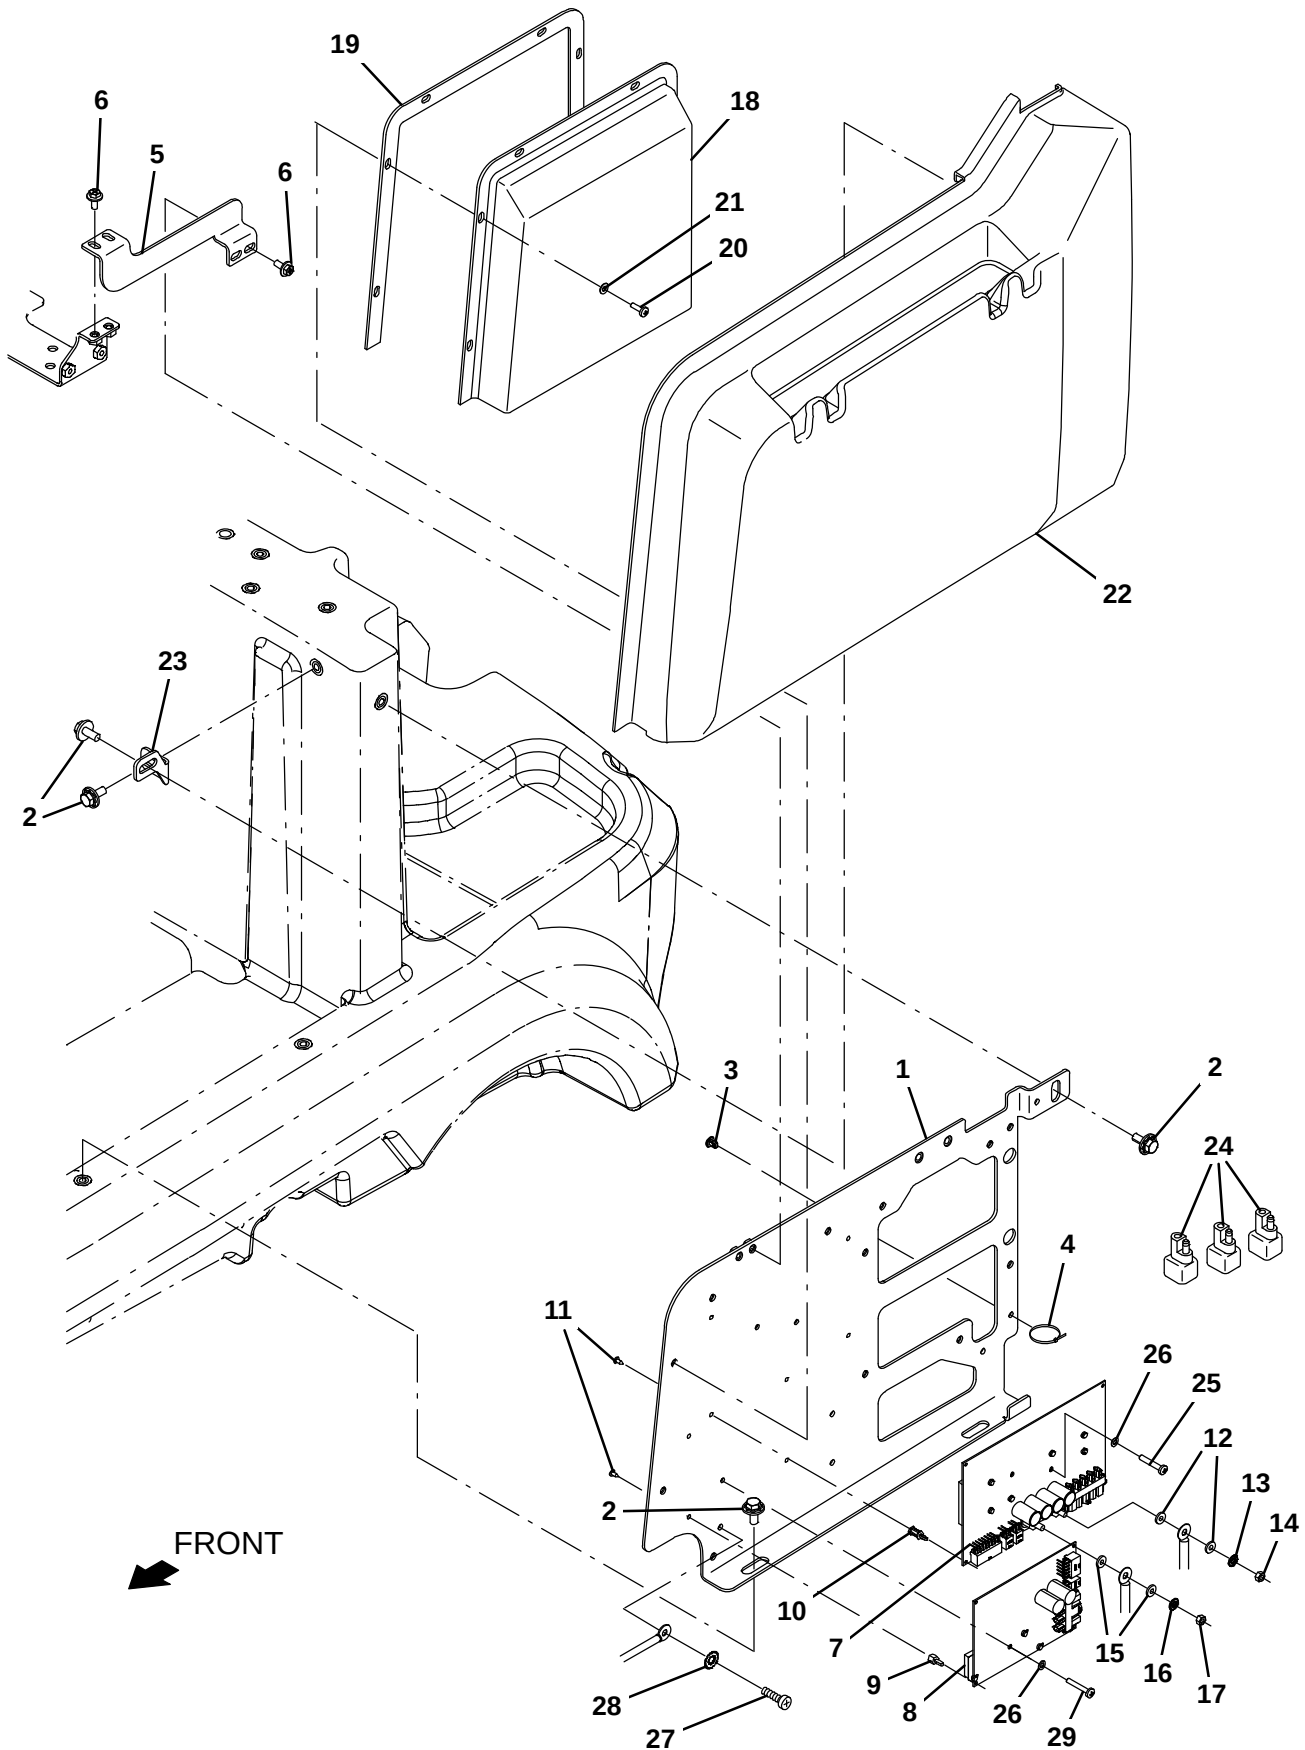


Fig. 22 – Electrical Circuit Board Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200918	(10000000–19999999)	Plate Wldt, Mtg, Electronic Component	1
2	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	5
3	1202868	(10000000–19999999)	Clip, Tie, 0.25d, Plstc	7
4	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	7
5	1203717	(10000000–19999999)	Bracket, Stiffener	1
6	1034731	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	4
7	9010931	(10000000–19999999)	Circuit Board Kit, Scrub, Afmkt [T12]	1
8	9010932	(10000000–19999999)	Circuit board Kit, H20_Sba, Afmkt [T12]	1
9	1016825	(10000000–19999999)	Support, Circuitboard	4
10	1202869	(10000000–19999999)	Support, Circuitboard [0.5"]	4
11	3701.6	(10000000–19999999)	Screw, Pan, Phl, 06–32 x 0.38, Shmtl, Ss	8
12	1202862	(10000000–19999999)	Washer, Flat, .21b .39d .04, Brs	2
13	07514	(10000000–19999999)	Washer, Lock, Int, 10, Ss	1
14	1202864	(10000000–19999999)	Nut, Hex, Std, M5 X 0.80, Brs	1
15	1061918	(10000000–19999999)	Washer, Flat, 0.25b 0.47d .06, Brs	2
16	07515	(10000000–19999999)	Washer, Lock, Int, 0.25, Ss	1
17	1061910	(10000000–19999999)	Nut, Hex, Std, M6 X 1.00, Brs	1
18	1200792	(10000000–19999999)	Cover, Box, Circuitboard	1
19	1201210	(10000000–19999999)	Gasket, Cover, Circuitboard	1
20	06934	(10000000–19999999)	Screw, Pan, Phl, M5 X 0.80 X 20, 4.8	6
21	140011	(10000000–19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	6
22	9010922	(10000000–19999999)	Side Cover, Std, Afmkt [T12]	1
23	1201024	(10000000–19999999)	Bracket, Mtg, Panel	1
24	222290	(10000000–19999999)	Diode, Ele, Plug	3
25	06929	(10000000–19999999)	Screw, Pan, Phl, M4 X 0.70 X 25, 4.8	2
26	1202860	(10000000–19999999)	Washer, Flat, 0.17b 0.31d .03, Nyl	3
27	24199	(10000000–19999999)	Screw, Hex, M5 X 0.80 X 16, Ss	1
28	41140	(10000000–19999999)	Washer, Lock, Int–Ext, 0.25	1
29	24265	(10000000–19999999)	Screw, Pan, Phl, M4 X 0.70 X 16, Ss	1

Fig. 23 – Electrical Contactor and Wires Group

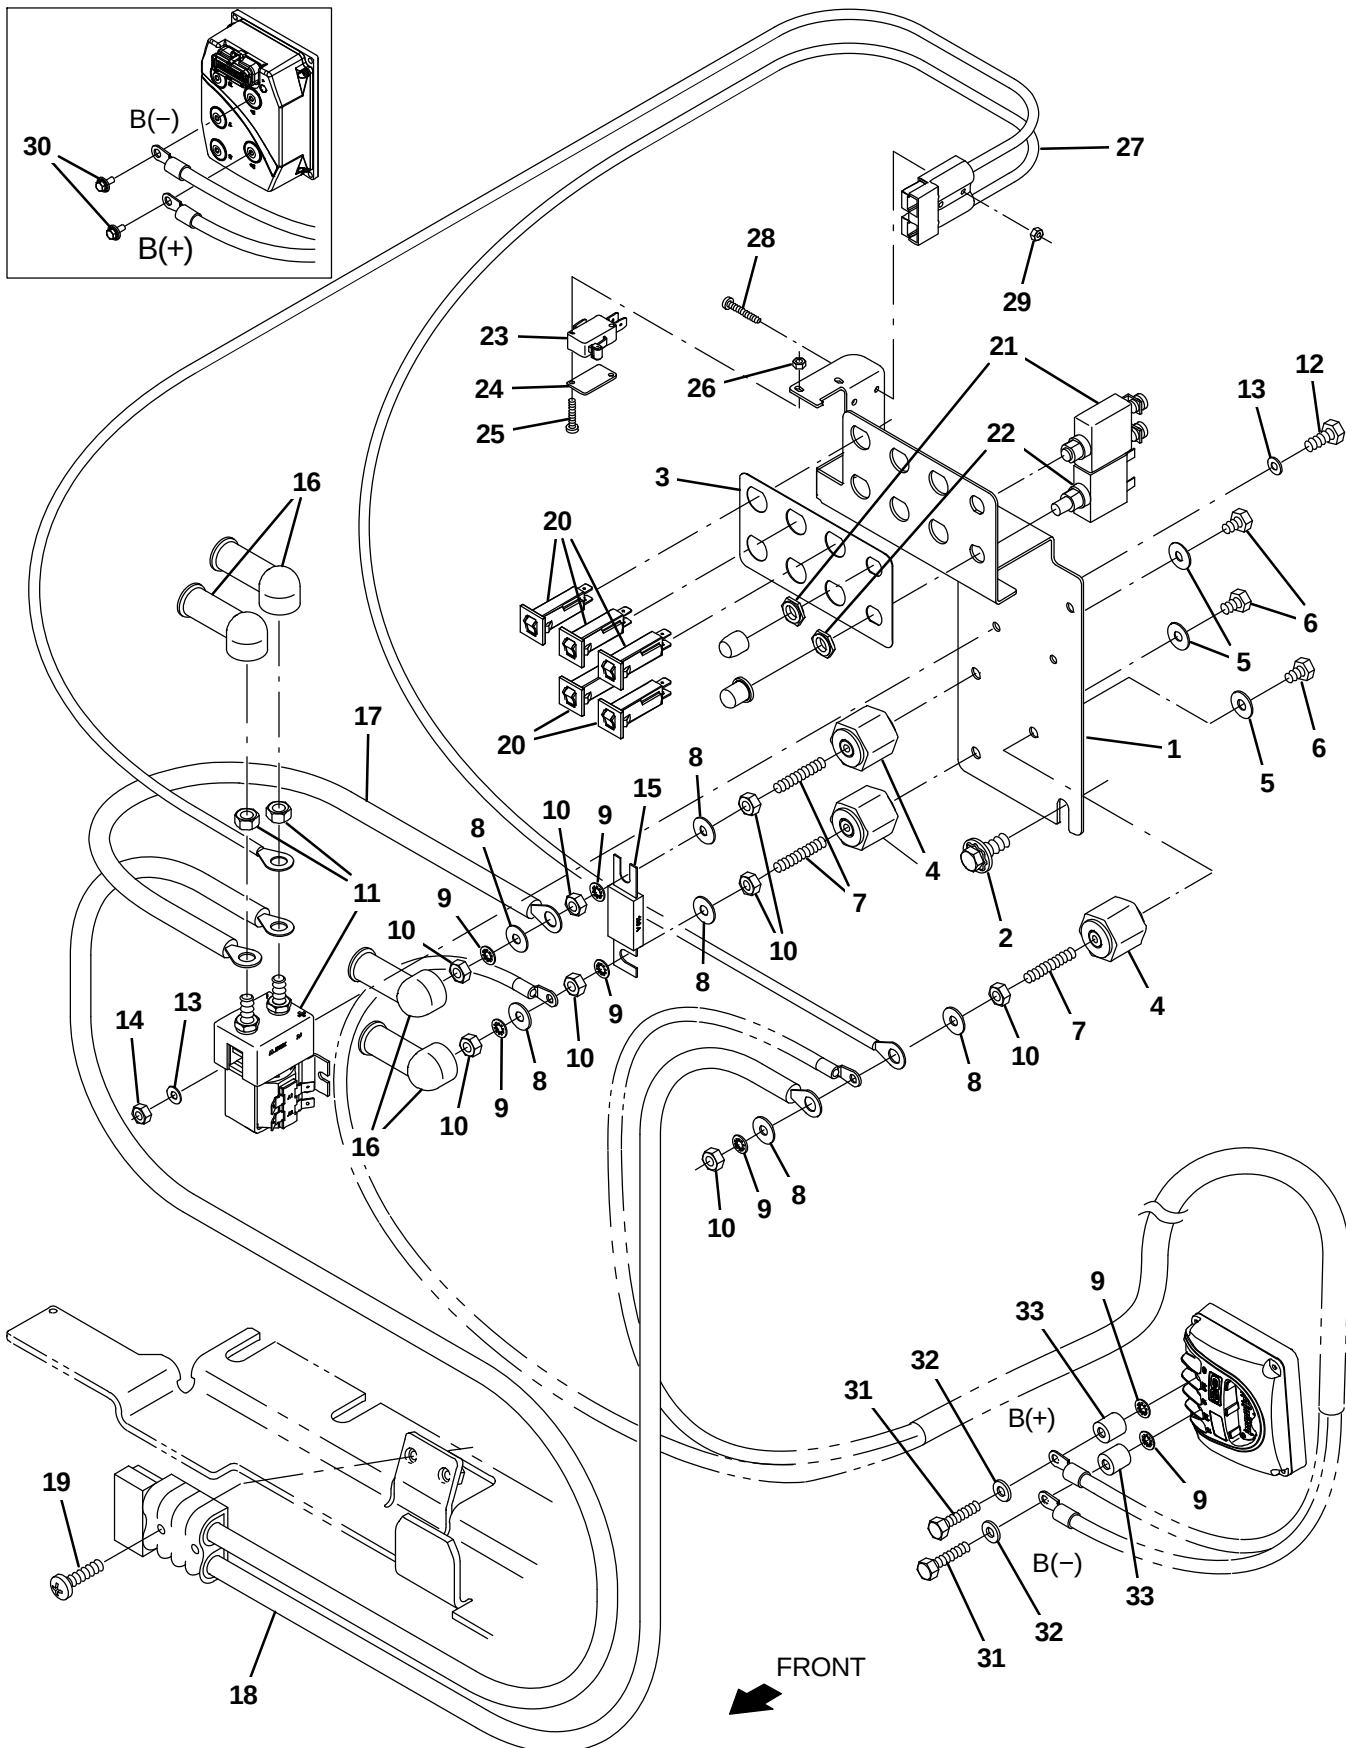


Fig. 23 – Electrical Contactor and Wires Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1246191	(10000000-19999999)	Plate, Electrical	1
2	1020341	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
3	1200913	(10000000-19999999)	Label, Circuitbreaker	1
4	76062	(10000000-19999999)	Stand-Off, Wir, 0.25, Insulator, Panel	3
5	01684	(10000000-19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	3
6	58670	(10000000-19999999)	Screw, Hex, .25-20 X 0.50, NI	3
7	41702	(10000000-19999999)	Rod, Thrd, Full, .25-20 01.5l	3
8	32490	(10000000-19999999)	Washer, Flat, 0.25, Std	6
9	32982	(10000000-19999999)	Washer, Lock, Int, 0.25	7
10	01690	(10000000-19999999)	Nut, Hex, Std, .25-20	8
11	397609	(10000000-19999999)	Contactor, 36vdc, No	1
12	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	2
13	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	4
14	09739	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
15	87318	(10000000-19999999)	Fuse, 080a, 0.88 2.4l, 125volt, Slow-Blow	1
16	1016314	(10000000-19999999)	Boot, 90deg .50id 1.00id 2.50l, Red	4
17	1069894	(10000000-19999999)	Cable, 06ga 5.5l Brown .25ring /.312ring	1
18	1069897	(10000000-19999999)	Cable, Battery, 4ga, .25ring /.312ring	1
19	33944	(10000000-19999999)	Screw, Pan, Phl, M6 X 1.00 X 35, 4.8	2
20	1064184	(10000000-19999999)	Circuitbreaker, 02.5a, Resetable	5
21	383724	(10000000-19999999)	Circuitbreaker, 25.0a, Resetable	1
22	1206757	(10000000-19999999)	Circuitbreaker, 60.0a, resetable	1
23	600437	(10000000-19999999)	Switch, Snap, 15a, Rlr	1
24	601359	(10000000-19999999)	Plate, Backing, Switch	1
25	06922	(10000000-19999999)	Screw, Pan, Phl, M3 X 0.50 X 20, 4.8	2
26	01754	(10000000-19999999)	Nut, Hex, Std, M3 X 0	2
27	1059169	(10000000-19999999)	Cable Assy, 10ga .25ring /.31ring, 050a	1
28	25005	(10000000-19999999)	Screw, Pan, Phl, 06-32 X 1.00, G1	2
29	75939	(10000000-19999999)	Nut, Hex, Lock, #06-32, NI	2
30	1034731	(10000000-10863997)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	2
31	06946	(10863998-19999999)	Screw, Hex, M6 X 1.00 X 35, 8.8	2
32	32483	(10863998-19999999)	Washer, Flat, 0.25, Sae	2
33	1206722	(10863998-19999999)	Sleeve, P/M, 0.25B 0.38D 0.8L	2

Fig. 24 – Battery Group, 240Ah


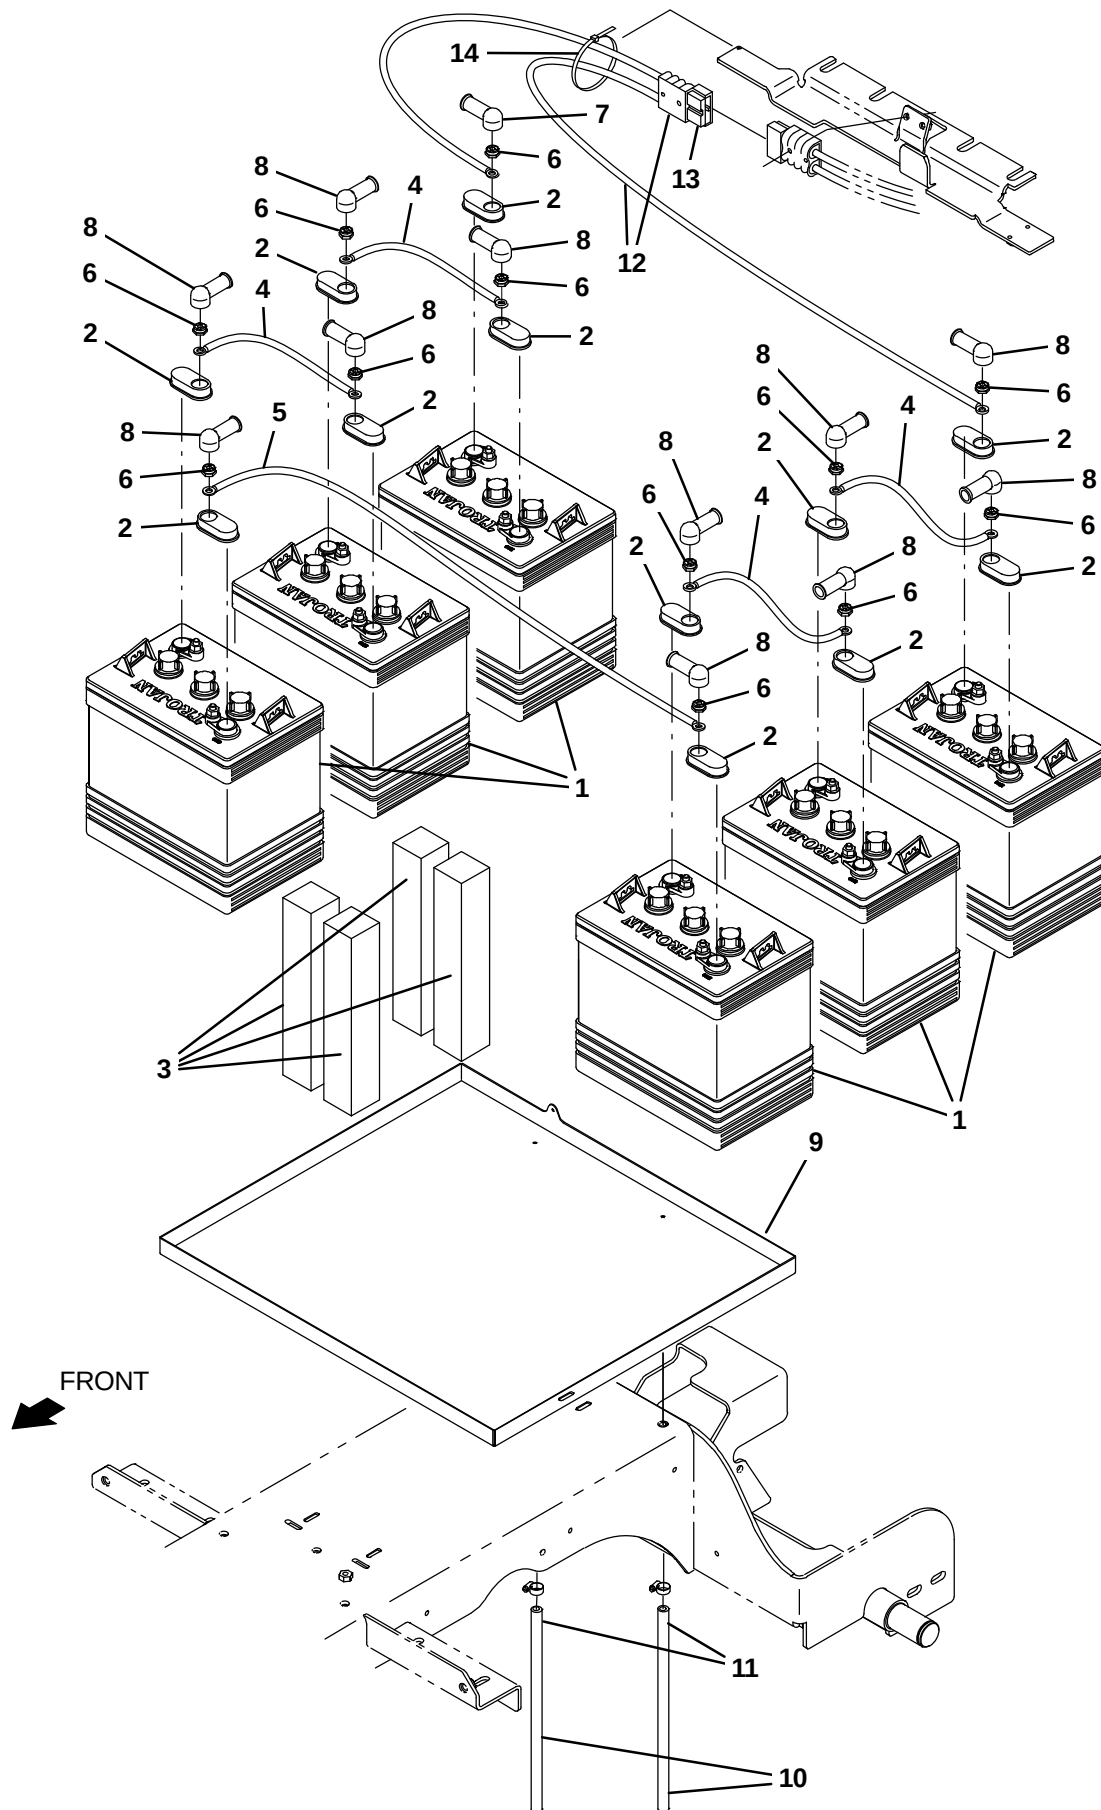


Fig. 24 – Battery Group, 240Ah

Ref.	Part No.	Serial Number	Description	Qty.
1	222280	(10000000–19999999)	Battery, Wet, 06vdc 0240ah	6
2	1041030	(10000000–19999999)	Cap, Battery	12
3	83415	(10000000–19999999)	Spacer, Battery, Foam, 2.00 X 2.0 X 11.0	4
4	223355	(10000000–19999999)	Cable, 04ga 08.0l Blk .34ring /.34ring	4
5	223356	(10000000–19999999)	Cable, 04ga 12.0l Blk .34ring /.34ring	1
6	87435	(10000000–19999999)	Nut, Hex, Flexlock, .31–18	12
7	1016314	(10000000–19999999)	Boot, 90deg .50id 1.00id 2.50l, Red	1
8	611221	(10000000–19999999)	Boot, Terminal, Battery, 25.4mm, Blk	11
9	1201303	(10000000–19999999)	Tray Wldt, Battery	1
10	1006401	(10000000–19999999)	Hose, Afmkt, Pvc, Brd, 0.50id, 03ft, Clr	1
11	54333	(10000000–19999999)	Clamp, Hose, Wormdrive, 0.31–0.88d, .31w	2
▽ 12	223361	(10000000–19999999)	Cable Assy, 04ga .34ring /.34ring, 175a	1
▲ 13	22892	(10000000–19999999)	Connector, Anderson, 175a, Gray	1
14	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1

Fig. 25 – Electrical Schematic Group (S/N 10000000–10863997)

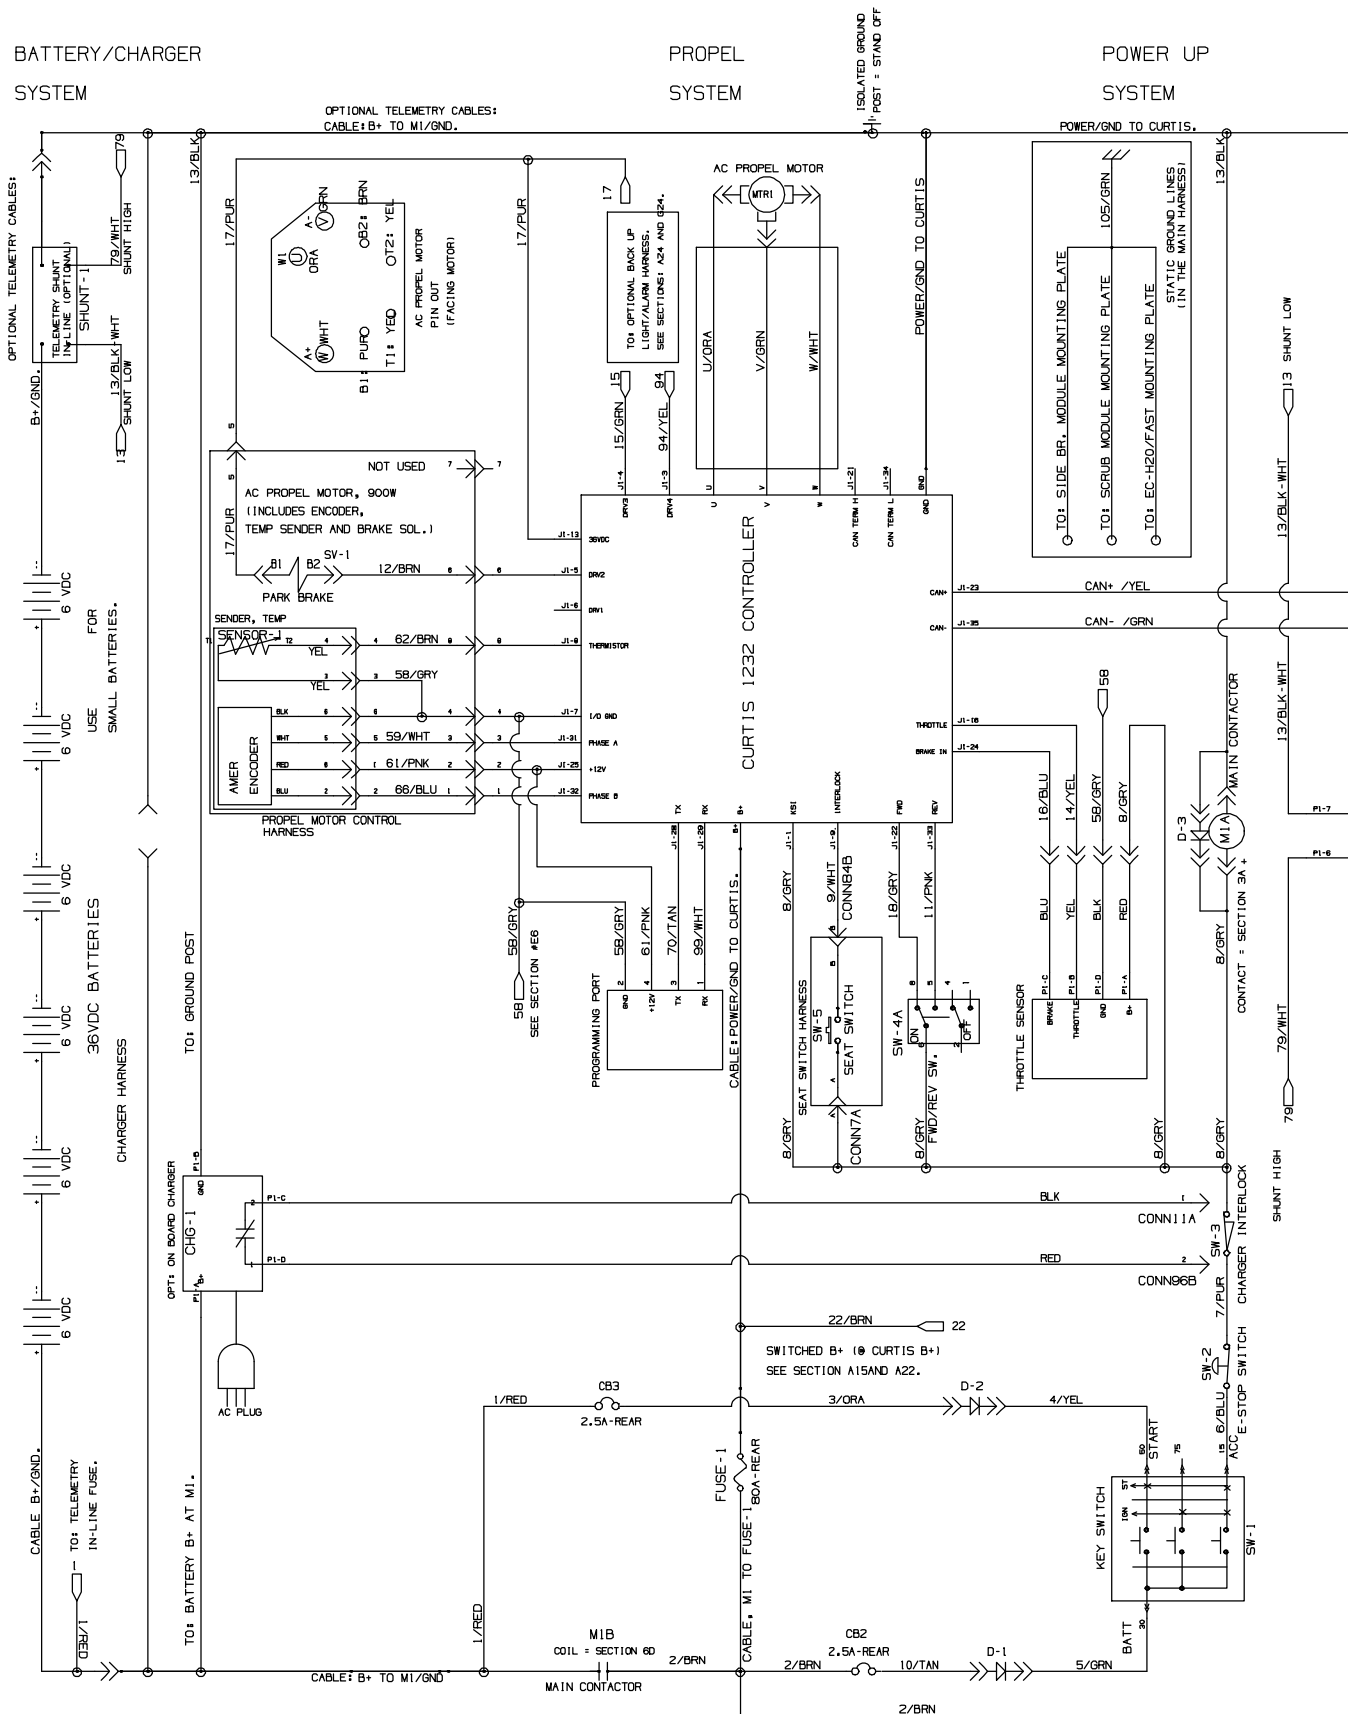


1071333-356358

Fig. 25 – Electrical Schematic Group (S/N 10000000–10863997)

SCRUB
MODULE


WATER PICK UP
MODULE

USER INTERFACE
MODULE

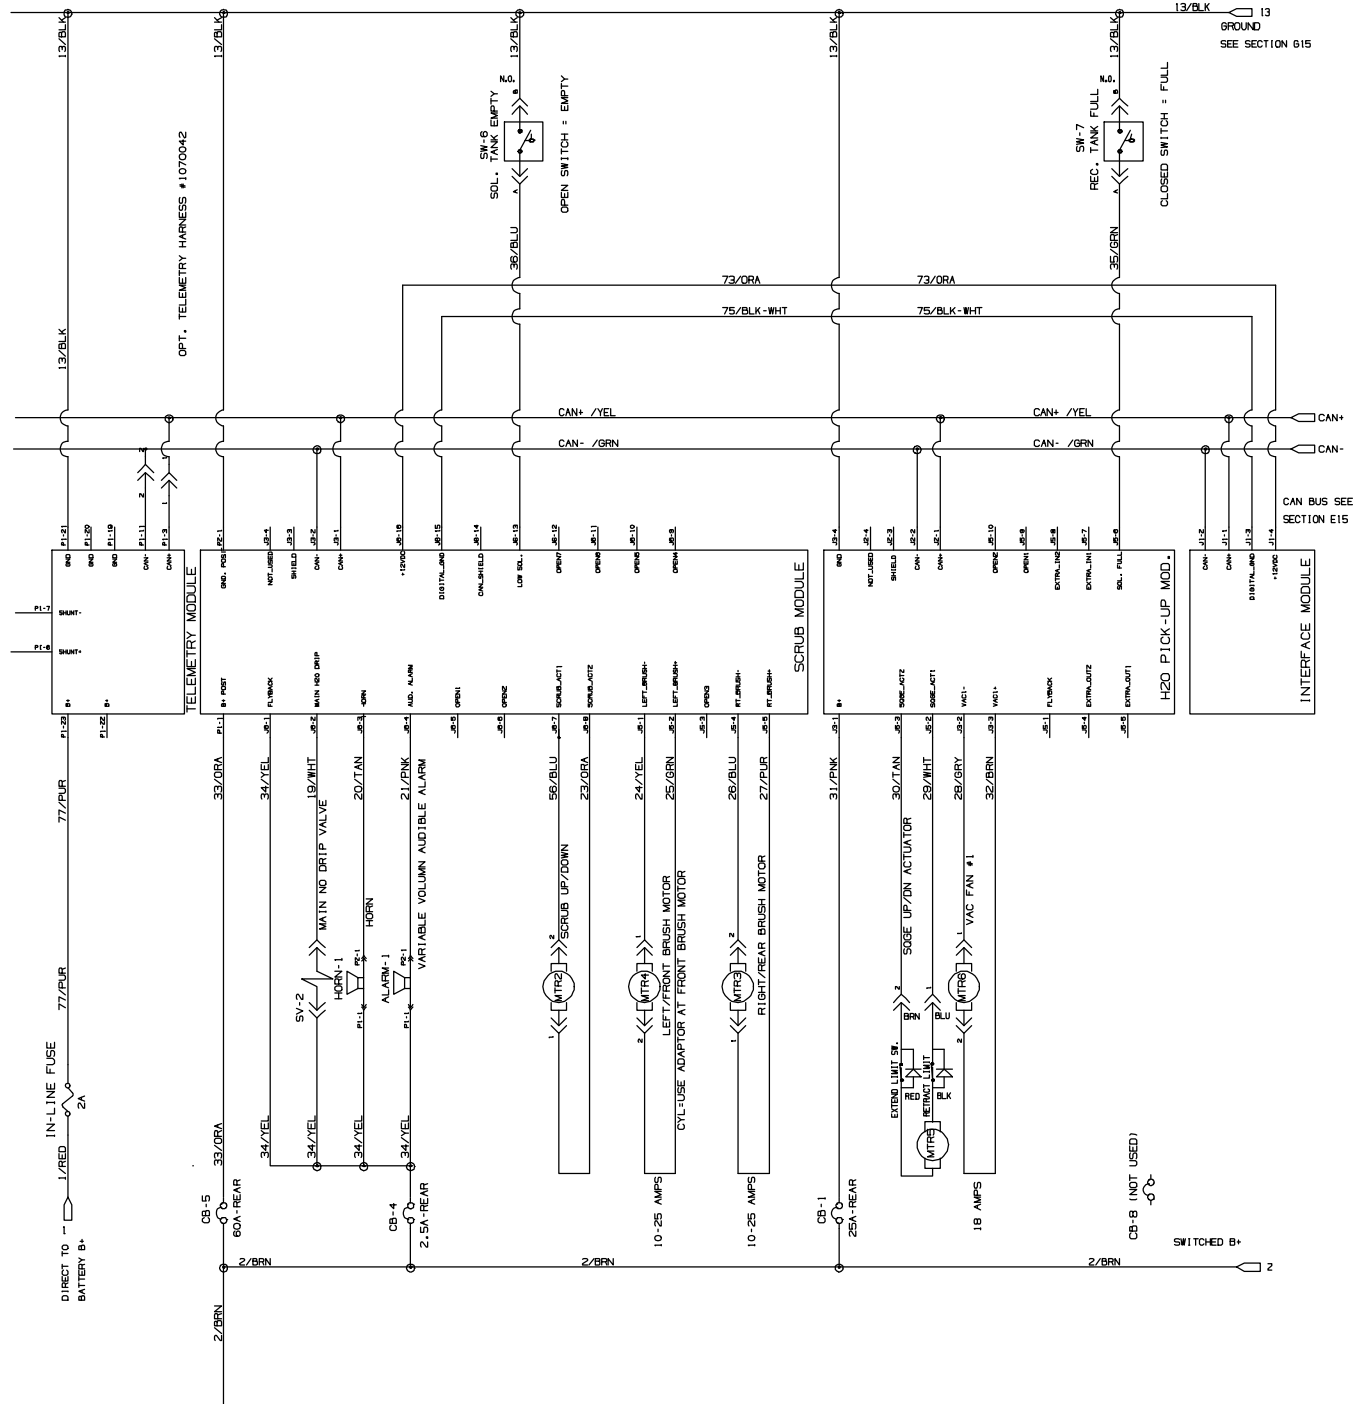

1071333-356358

Fig. 25 – Electrical Schematic Group (S/N 10000000–10863997)

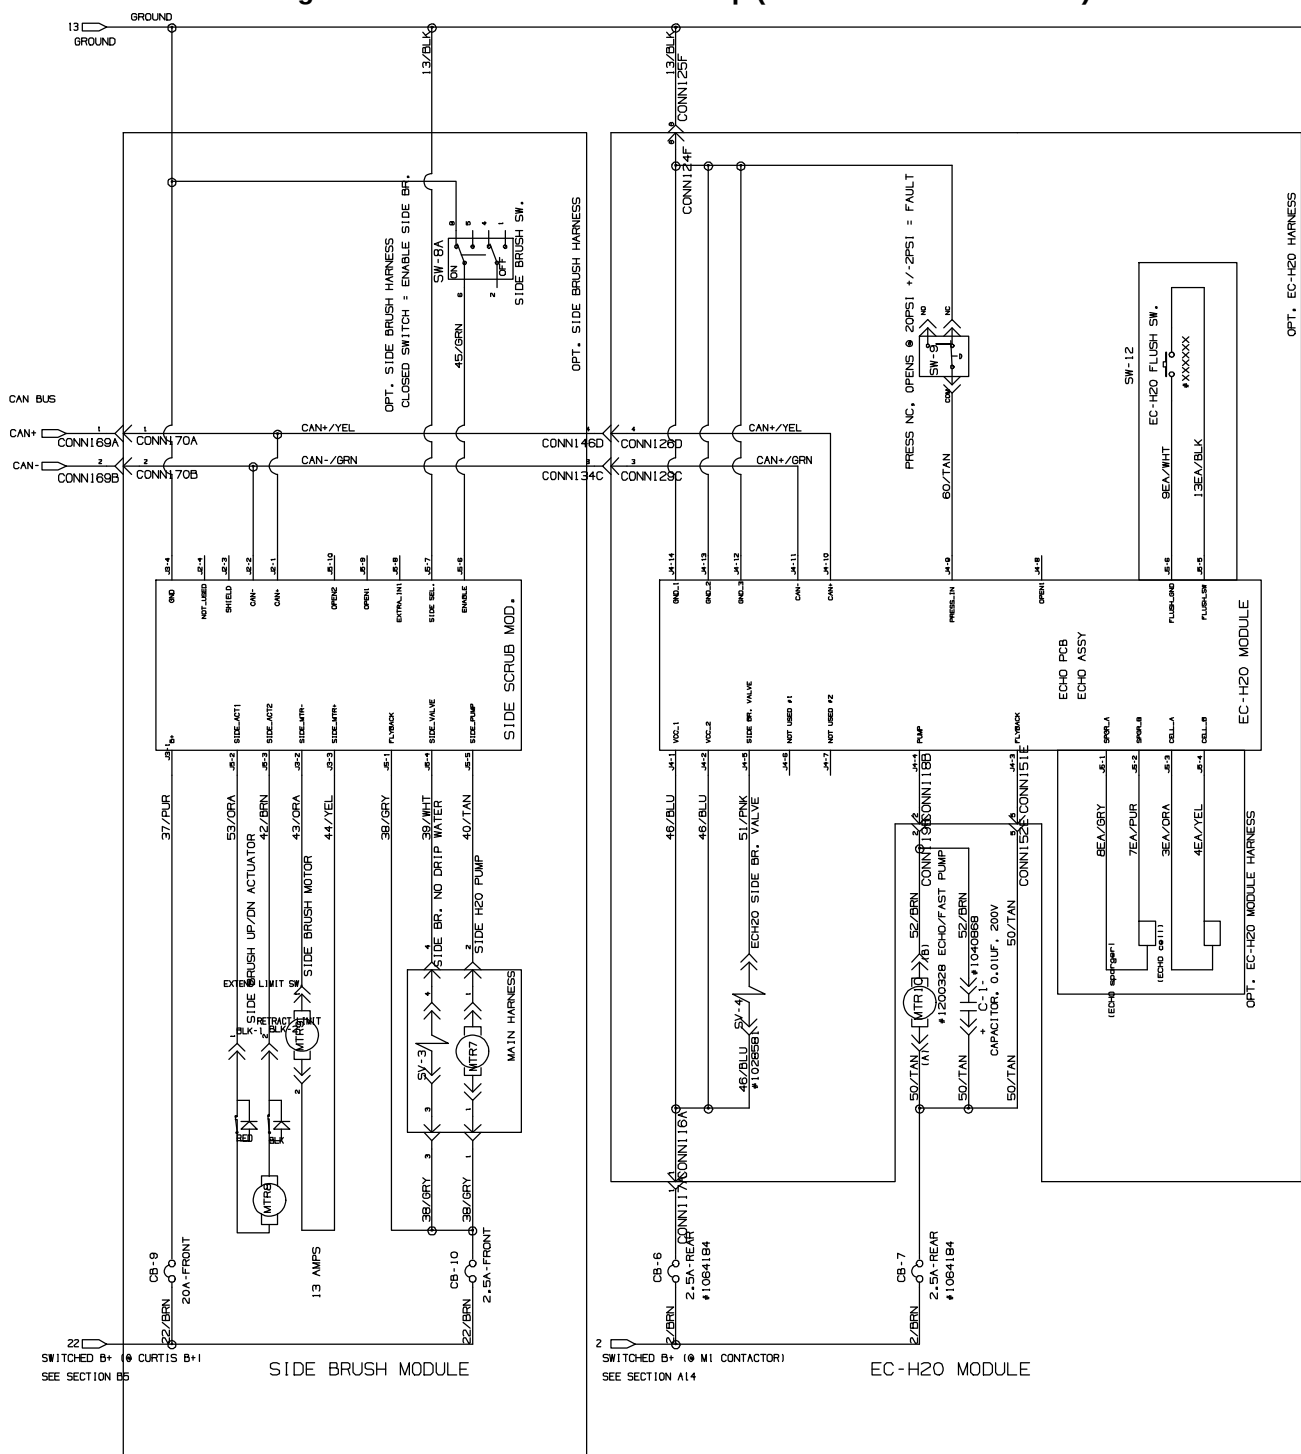

1071333 – 356358

SWITCHED B+ (● CURTIS B+)
SEE SECTION B5

SPRAY WAND

LIGHTS

BACK UP

ALARM/LIGHT

LOW = REV.
94/YEL
94/YEL
LOW = FWD. OR REV.
(SPECIAL ONLY)

15/GRN
15/GRN
CONNN103E
CONNN102E
CONNN98B
CONNN97B
CONNN96B
M2B
P1-1
P2-1
ALARM-2
REVERSE ALARM
NOT USED
(FOR SPECIALS)
CONNN105D
CONNN104D
CONNN107C
CONNN106C
CONNN105A
CONNN106A
CONNN107A
CONNN108A
CONNN109A
CONNN110A
CONNN111A
CONNN112A
CONNN113A
CONNN114A
CONNN115A
CONNN116A
CONNN117A
CONNN118A
CONNN119A
CONNN120A
CONNN121A
CONNN122A
CONNN123A
CONNN124A
CONNN125A
CONNN126A
CONNN127A
CONNN128A
CONNN129A
CONNN130A
CONNN131A
CONNN132A
CONNN133A
CONNN134A
CONNN135A
CONNN136A
CONNN137A
CONNN138A
CONNN139A
CONNN140A
CONNN141A
CONNN142A
CONNN143A
CONNN144A
CONNN145A
CONNN146A
CONNN147A
CONNN148A
CONNN149A
CONNN150A
CONNN151A
CONNN152A
CONNN153A
CONNN154A
CONNN155A
CONNN156A
CONNN157A
CONNN158A
CONNN159A
CONNN160A
CONNN161A
CONNN162A
CONNN163A
CONNN164A
CONNN165A
CONNN166A
CONNN167A
CONNN168A
CONNN169A
CONNN170A
CONNN171A
CONNN172A
CONNN173A
CONNN174A
CONNN175A
CONNN176A
CONNN177A
CONNN178A
CONNN179A
CONNN180A
CONNN181A
CONNN182A
CONNN183A
CONNN184A
CONNN185A
CONNN186A
CONNN187A
CONNN188A
CONNN189A
CONNN190A
CONNN191A
CONNN192A
CONNN193A
CONNN194A
CONNN195A
CONNN196A
CONNN197A
CONNN198A
CONNN199A
CONNN200A
CONNN201A
CONNN202A
CONNN203A
CONNN204A
CONNN205A
CONNN206A
CONNN207A
CONNN208A
CONNN209A
CONNN210A
CONNN211A
CONNN212A
CONNN213A
CONNN214A
CONNN215A
CONNN216A
CONNN217A
CONNN218A
CONNN219A
CONNN220A
CONNN221A
CONNN222A
CONNN223A
CONNN224A
CONNN225A
CONNN226A
CONNN227A
CONNN228A
CONNN229A
CONNN230A
CONNN231A
CONNN232A
CONNN233A
CONNN234A
CONNN235A
CONNN236A
CONNN237A
CONNN238A
CONNN239A
CONNN240A
CONNN241A
CONNN242A
CONNN243A
CONNN244A
CONNN245A
CONNN246A
CONNN247A
CONNN248A
CONNN249A
CONNN250A
CONNN251A
CONNN252A
CONNN253A
CONNN254A
CONNN255A
CONNN256A
CONNN257A
CONNN258A
CONNN259A
CONNN260A
CONNN261A
CONNN262A
CONNN263A
CONNN264A
CONNN265A
CONNN266A
CONNN267A
CONNN268A
CONNN269A
CONNN270A
CONNN271A
CONNN272A
CONNN273A
CONNN274A
CONNN275A
CONNN276A
CONNN277A
CONNN278A
CONNN279A
CONNN280A
CONNN281A
CONNN282A
CONNN283A
CONNN284A
CONNN285A
CONNN286A
CONNN287A
CONNN288A
CONNN289A
CONNN290A
CONNN291A
CONNN292A
CONNN293A
CONNN294A
CONNN295A
CONNN296A
CONNN297A
CONNN298A
CONNN299A
CONNN300A
CONNN301A
CONNN302A
CONNN303A
CONNN304A
CONNN305A
CONNN306A
CONNN307A
CONNN308A
CONNN309A
CONNN310A
CONNN311A
CONNN312A
CONNN313A
CONNN314A
CONNN315A
CONNN316A
CONNN317A
CONNN318A
CONNN319A
CONNN320A
CONNN321A
CONNN322A
CONNN323A
CONNN324A
CONNN325A
CONNN326A
CONNN327A
CONNN328A
CONNN329A
CONNN330A
CONNN331A
CONNN332A
CONNN333A
CONNN334A
CONNN335A
CONNN336A
CONNN337A
CONNN338A
CONNN339A
CONNN340A
CONNN341A
CONNN342A
CONNN343A
CONNN344A
CONNN345A
CONNN346A
CONNN347A
CONNN348A
CONNN349A
CONNN350A
CONNN351A
CONNN352A
CONNN353A
CONNN354A
CONNN355A
CONNN356A
CONNN357A
CONNN358A
CONNN359A
CONNN360A
CONNN361A
CONNN362A
CONNN363A
CONNN364A
CONNN365A
CONNN366A
CONNN367A
CONNN368A
CONNN369A
CONNN370A
CONNN371A
CONNN372A
CONNN373A
CONNN374A
CONNN375A
CONNN376A
CONNN377A
CONNN378A
CONNN379A
CONNN380A
CONNN381A
CONNN382A
CONNN383A
CONNN384A
CONNN385A
CONNN386A
CONNN387A
CONNN388A
CONNN389A
CONNN390A
CONNN391A
CONNN392A
CONNN393A
CONNN394A
CONNN395A
CONNN396A
CONNN397A
CONNN398A
CONNN399A
CONNN400A
CONNN401A
CONNN402A
CONNN403A
CONNN404A
CONNN405A
CONNN406A
CONNN407A
CONNN408A
CONNN409A
CONNN410A
CONNN411A
CONNN412A
CONNN413A
CONNN414A
CONNN415A
CONNN416A
CONNN417A
CONNN418A
CONNN419A
CONNN420A
CONNN421A
CONNN422A
CONNN423A
CONNN424A
CONNN425A
CONNN426A
CONNN427A
CONNN428A
CONNN429A
CONNN430A
CONNN431A
CONNN432A
CONNN433A
CONNN434A
CONNN435A
CONNN436A
CONNN437A
CONNN438A
CONNN439A
CONNN440A
CONNN441A
CONNN442A
CONNN443A
CONNN444A
CONNN445A
CONNN446A
CONNN447A
CONNN448A
CONNN449A
CONNN450A
CONNN451A
CONNN452A
CONNN453A
CONNN454A
CONNN455A
CONNN456A
CONNN457A
CONNN458A
CONNN459A
CONNN460A
CONNN461A
CONNN462A
CONNN463A
CONNN464A
CONNN465A
CONNN466A
CONNN467A
CONNN468A
CONNN469A
CONNN470A
CONNN471A
CONNN472A
CONNN473A
CONNN474A
CONNN475A
CONNN476A
CONNN477A
CONNN478A
CONNN479A
CONNN480A
CONNN481A
CONNN482A
CONNN483A
CONNN484A
CONNN485A
CONNN486A
CONNN487A
CONNN488A
CONNN489A
CONNN490A
CONNN491A
CONNN492A
CONNN493A
CONNN494A
CONNN495A
CONNN496A
CONNN497A
CONNN498A
CONNN499A
CONNN500A
CONNN501A
CONNN502A
CONNN503A
CONNN504A
CONNN505A
CONNN506A
CONNN507A
CONNN508A
CONNN509A
CONNN510A
CONNN511A
CONNN512A
CONNN513A
CONNN514A
CONNN515A
CONNN516A
CONNN517A
CONNN518A
CONNN519A
CONNN520A
CONNN521A
CONNN522A
CONNN523A
CONNN524A
CONNN525A
CONNN526A
CONNN527A
CONNN528A
CONNN529A
CONNN530A
CONNN531A
CONNN532A
CONNN533A
CONNN534A
CONNN535A
CONNN536A
CONNN537A
CONNN538A
CONNN539A
CONNN540A
CONNN541A
CONNN542A
CONNN543A
CONNN544A
CONNN545A
CONNN546A
CONNN547A
CONNN548A
CONNN549A
CONNN550A
CONNN551A
CONNN552A
CONNN553A
CONNN554A
CONNN555A
CONNN556A
CONNN557A
CONNN558A
CONNN559A
CONNN560A
CONNN561A
CONNN562A
CONNN563A
CONNN564A
CONNN565A
CONNN566A
CONNN567A
CONNN568A
CONNN569A
CONNN570A
CONNN571A
CONNN572A
CONNN573A
CONNN574A
CONNN575A
CONNN576A
CONNN577A
CONNN578A
CONNN579A
CONNN580A
CONNN581A

Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)

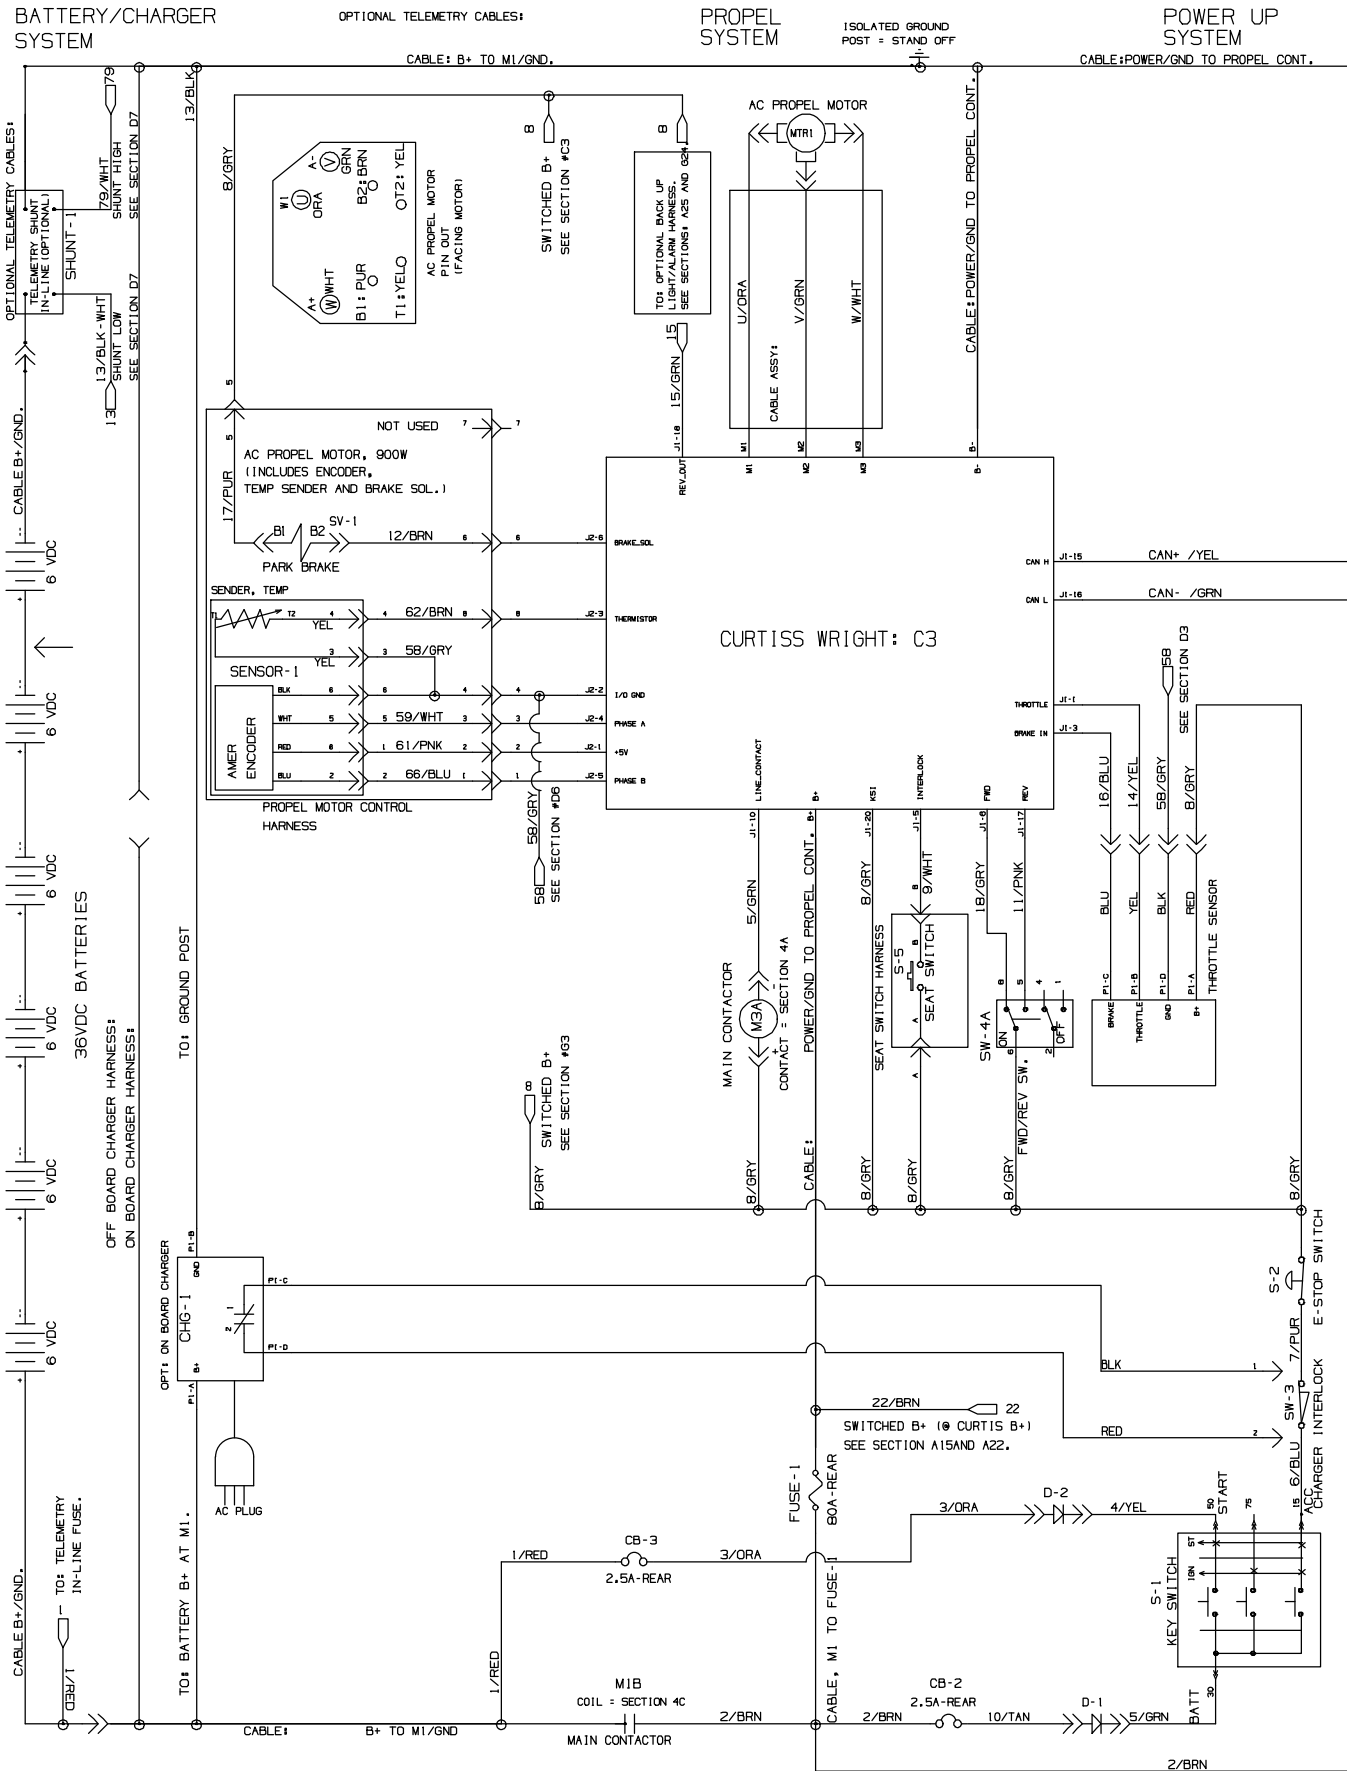


Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)


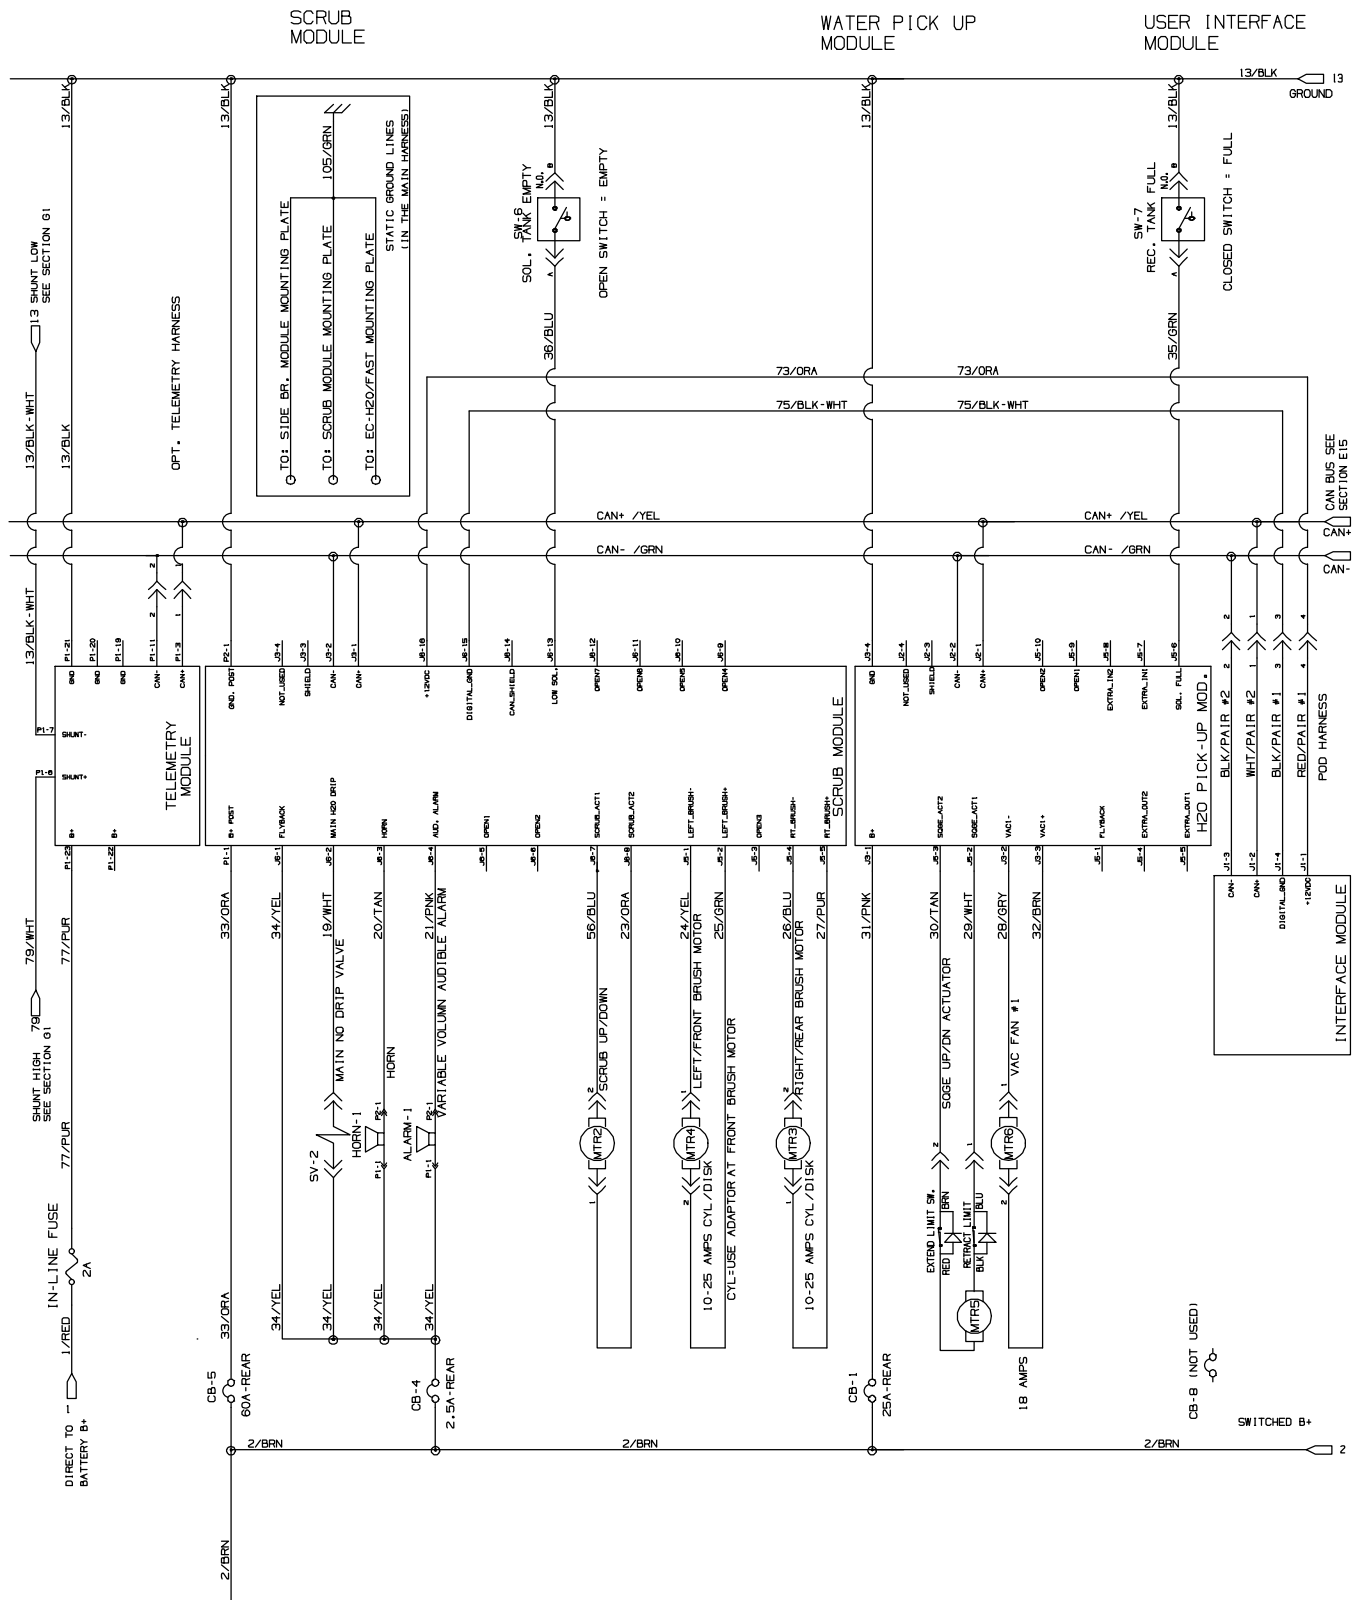


Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)

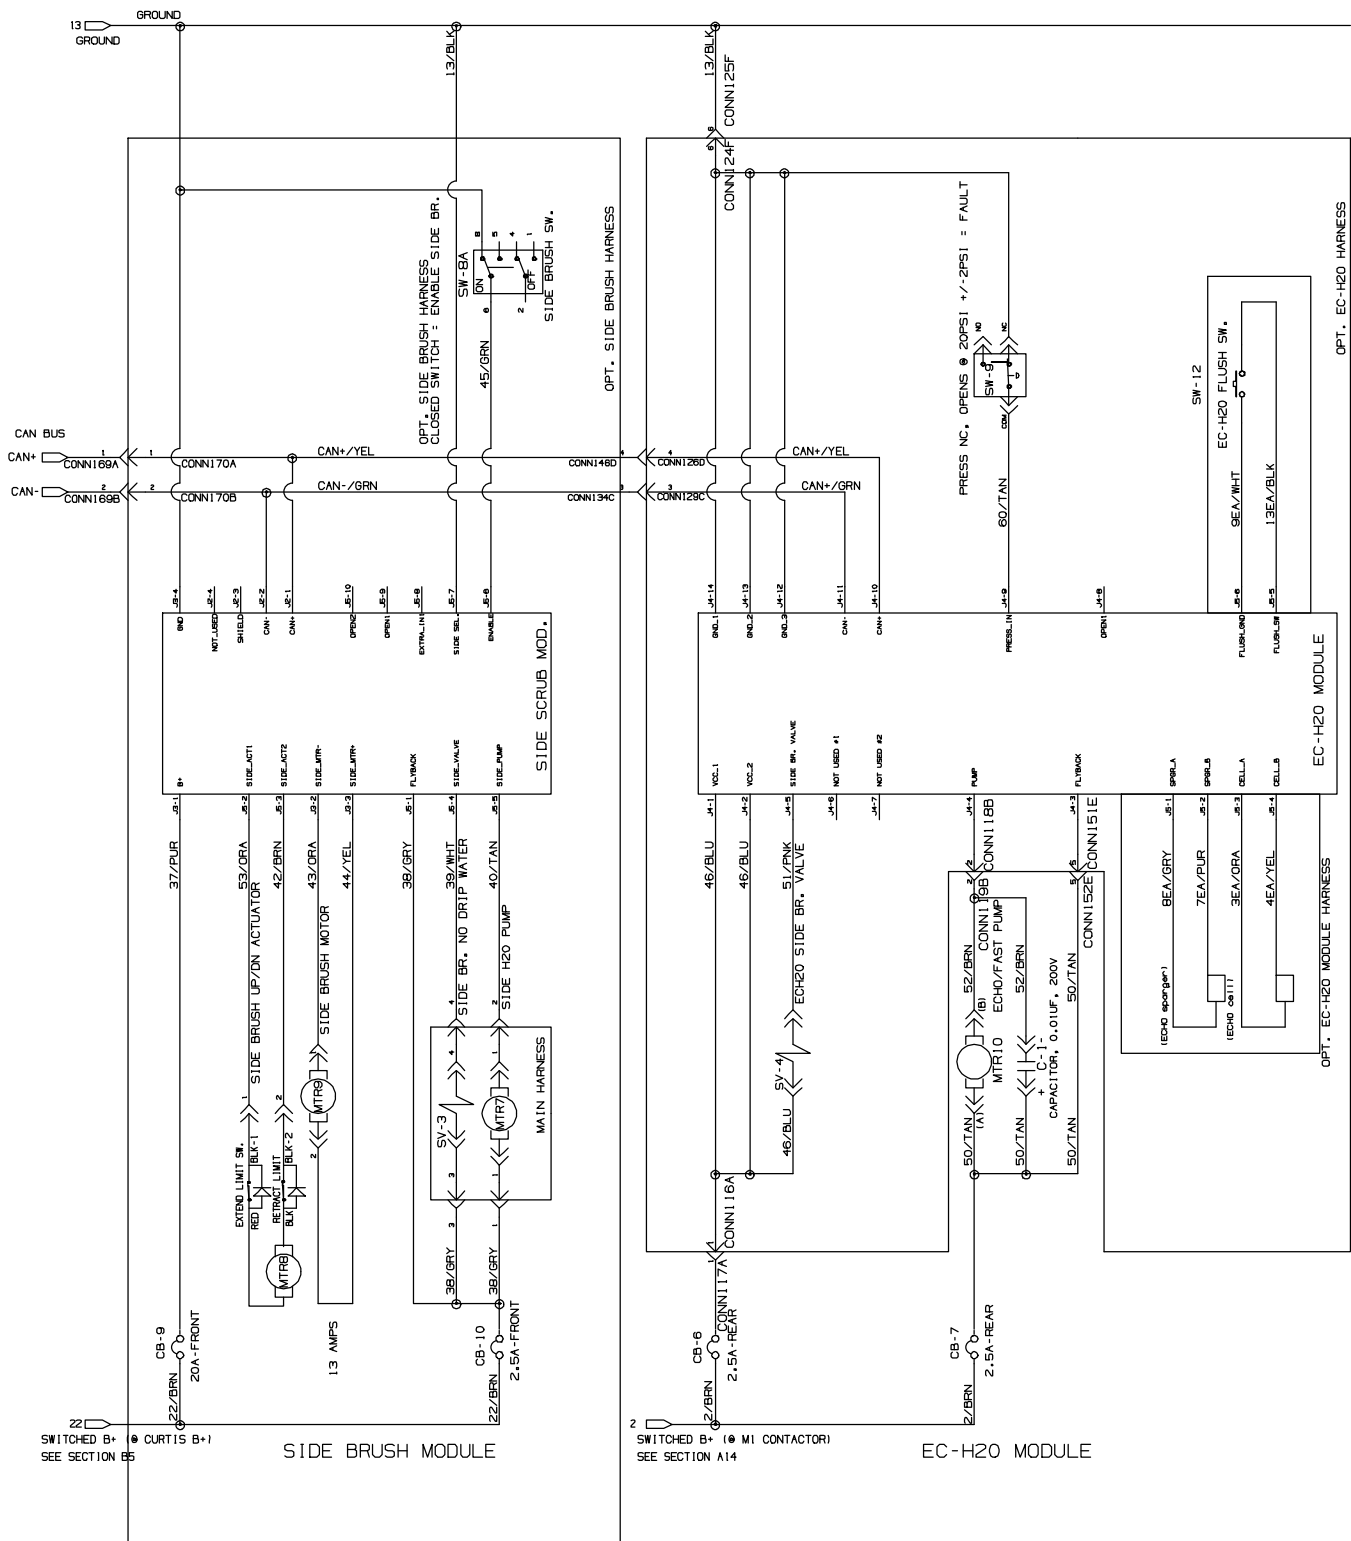

T12 9009916 (11-2019)




Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)


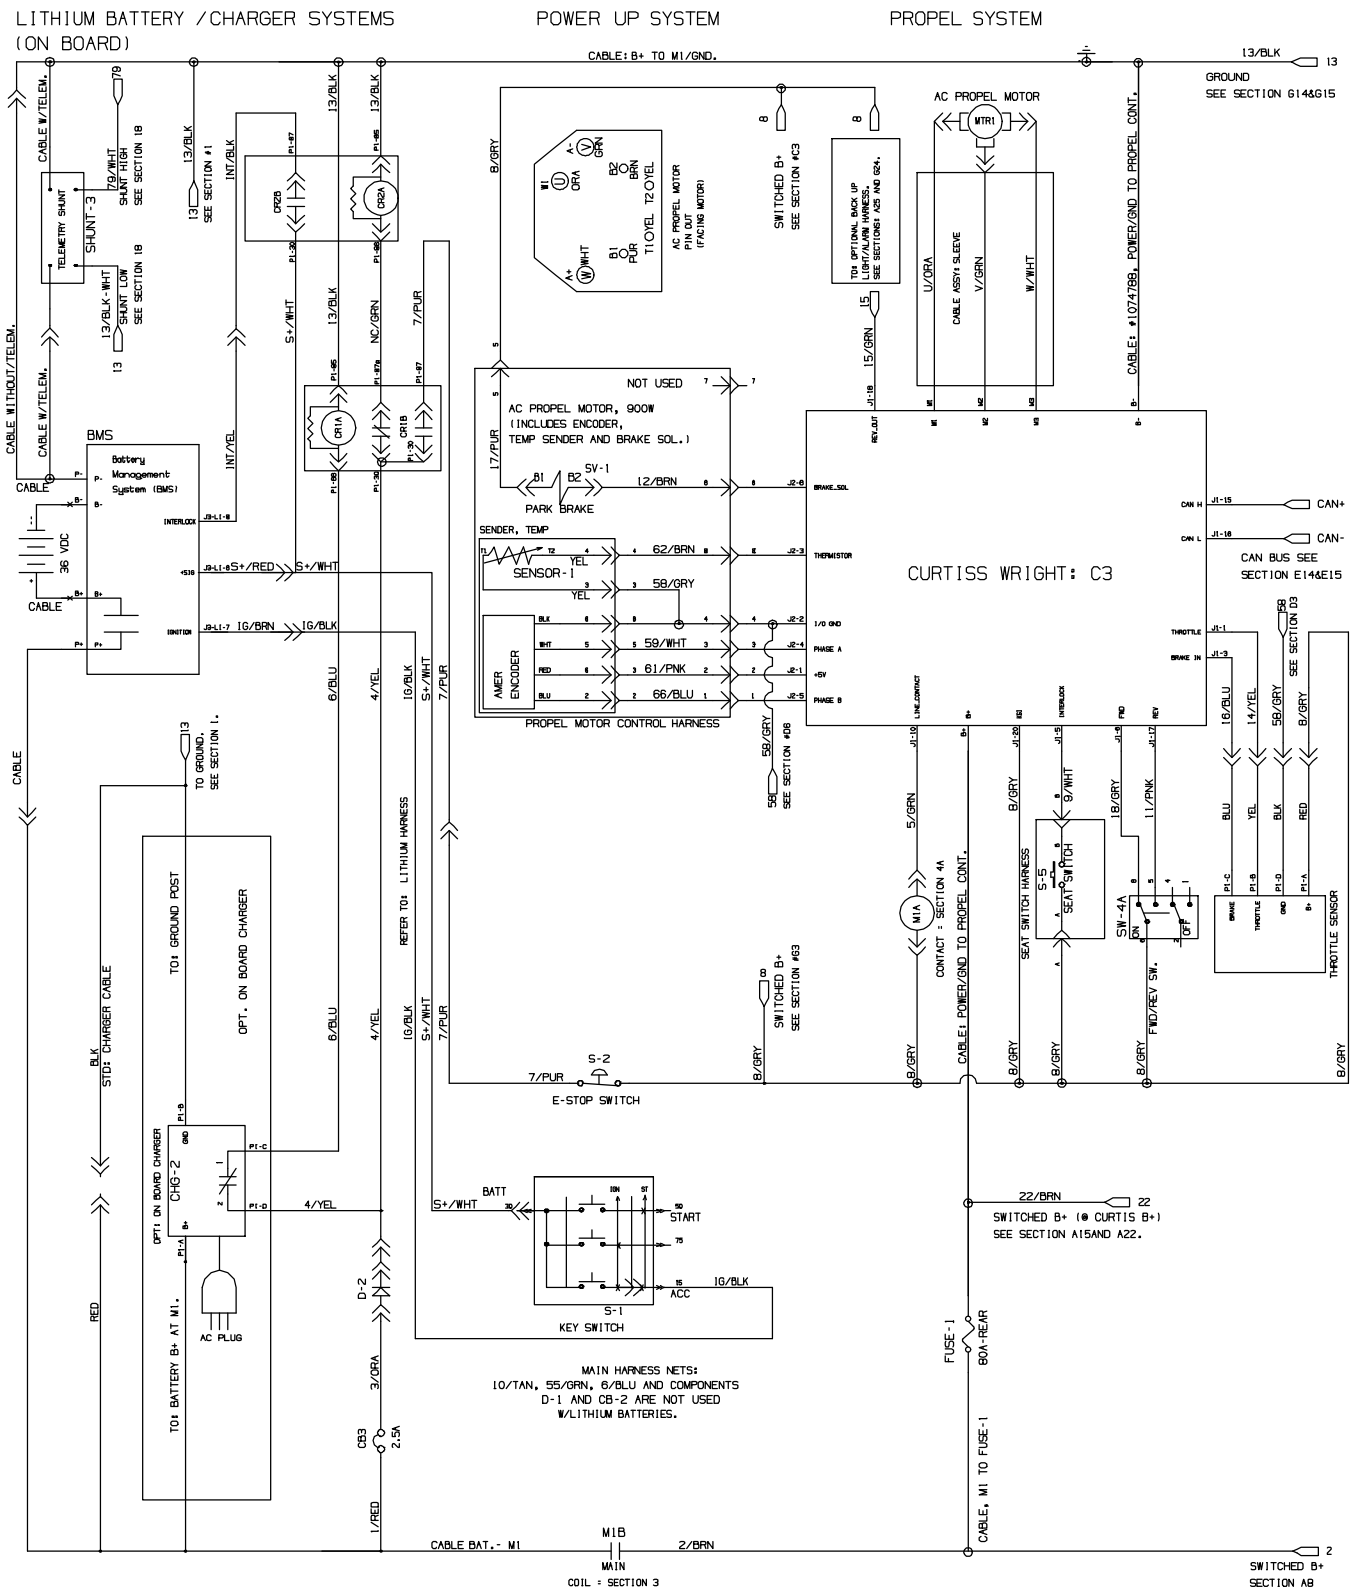


Fig. 26 – Electrical Schematic Group (S/N 10863998–19999999)

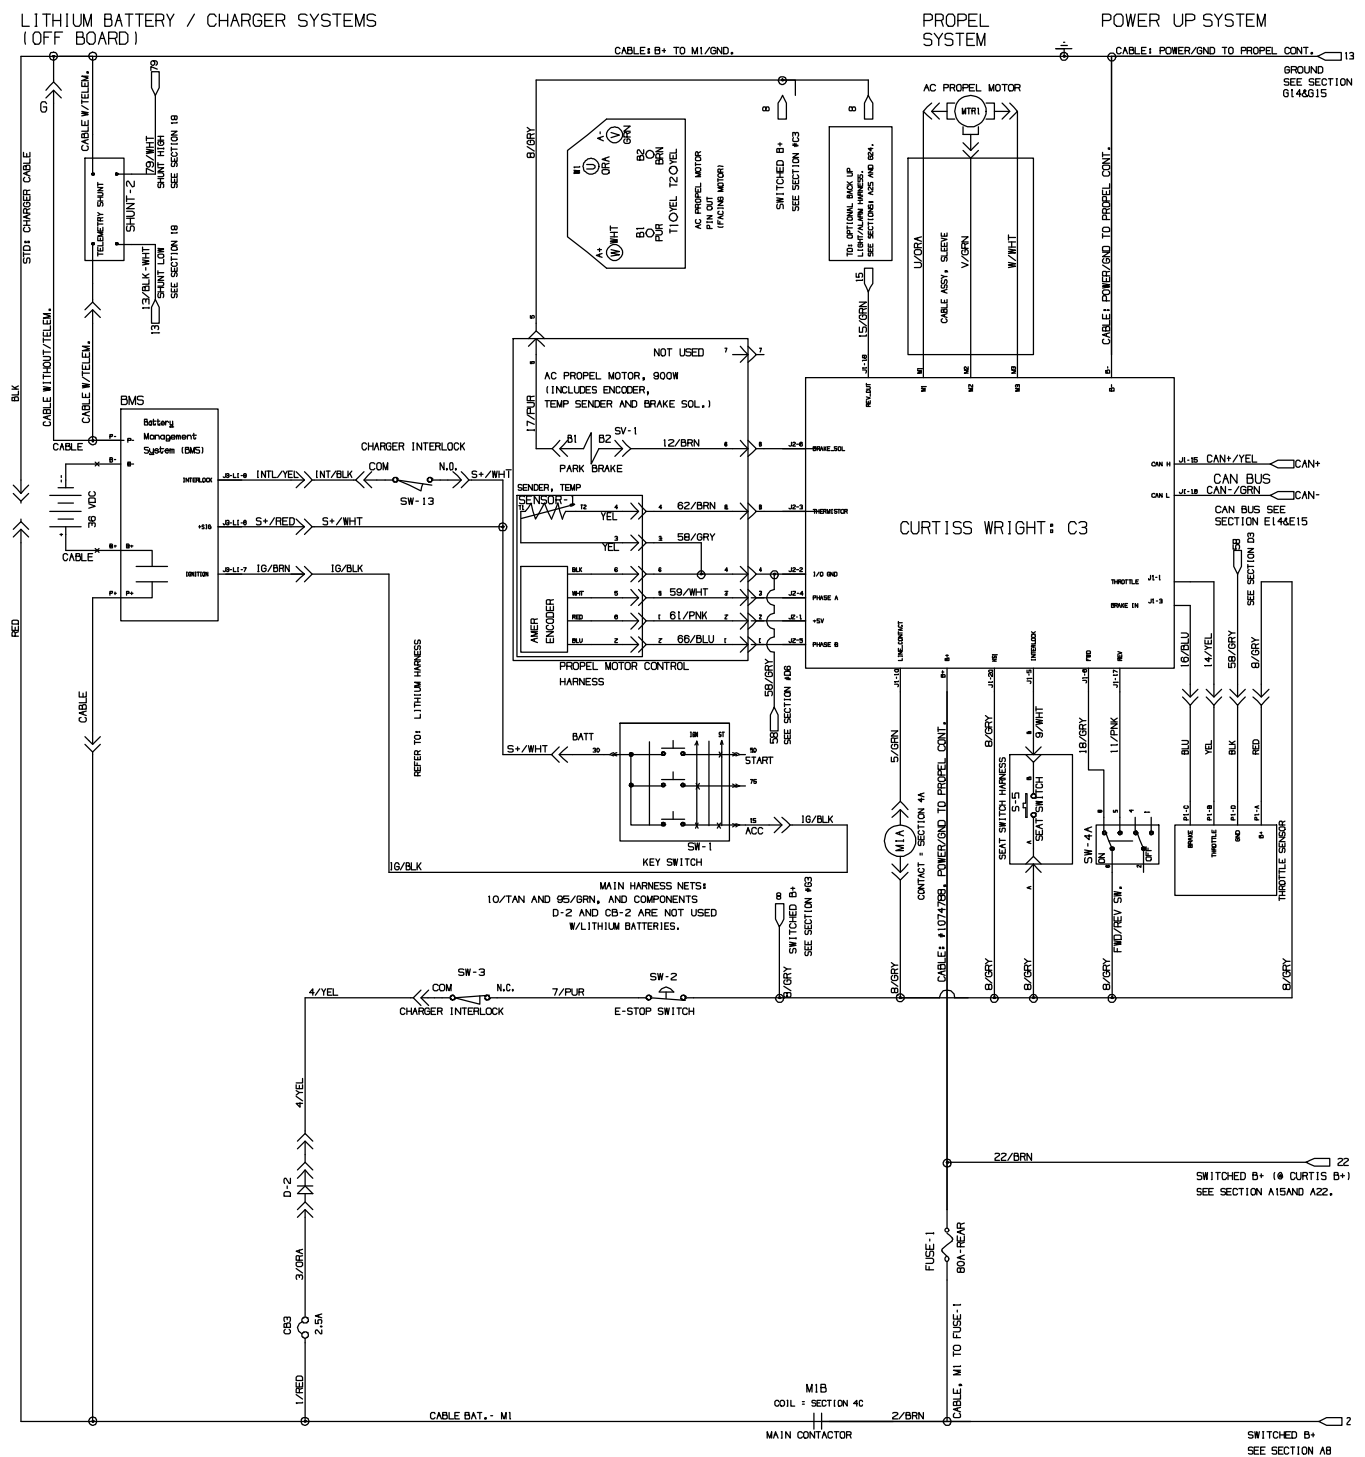

T12 9009916 (1-2013)



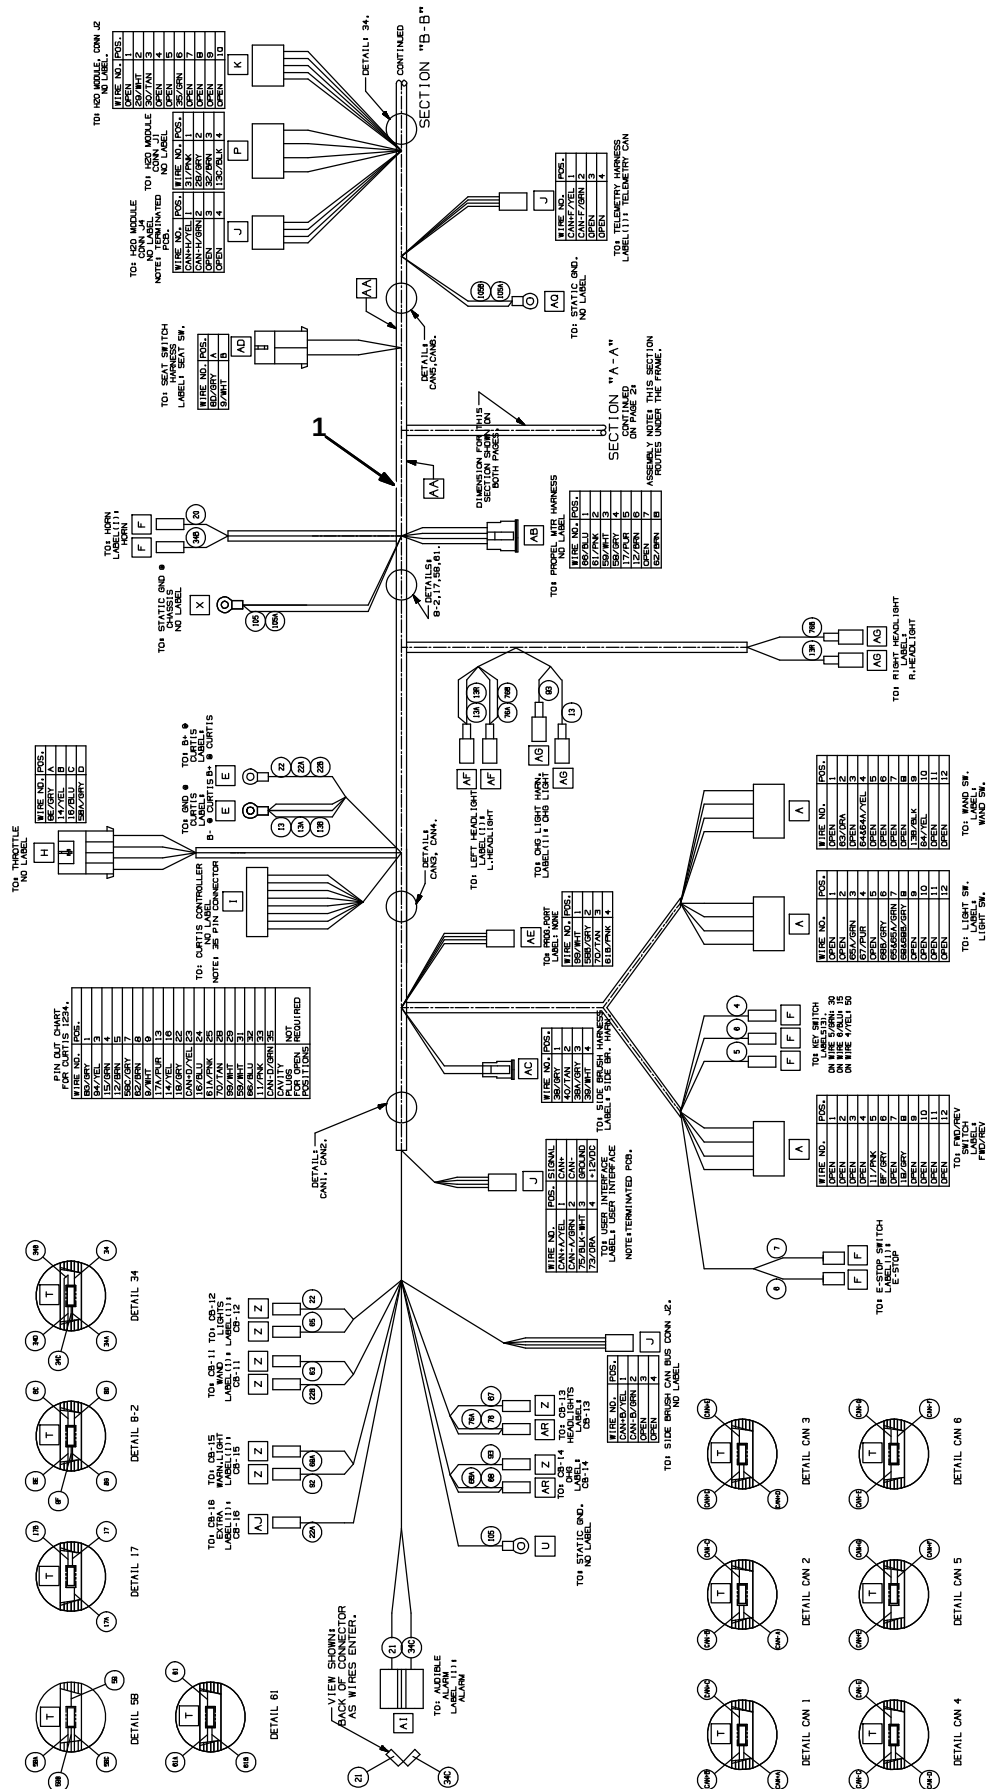


Fig. 27 – Wire Harnesses Group

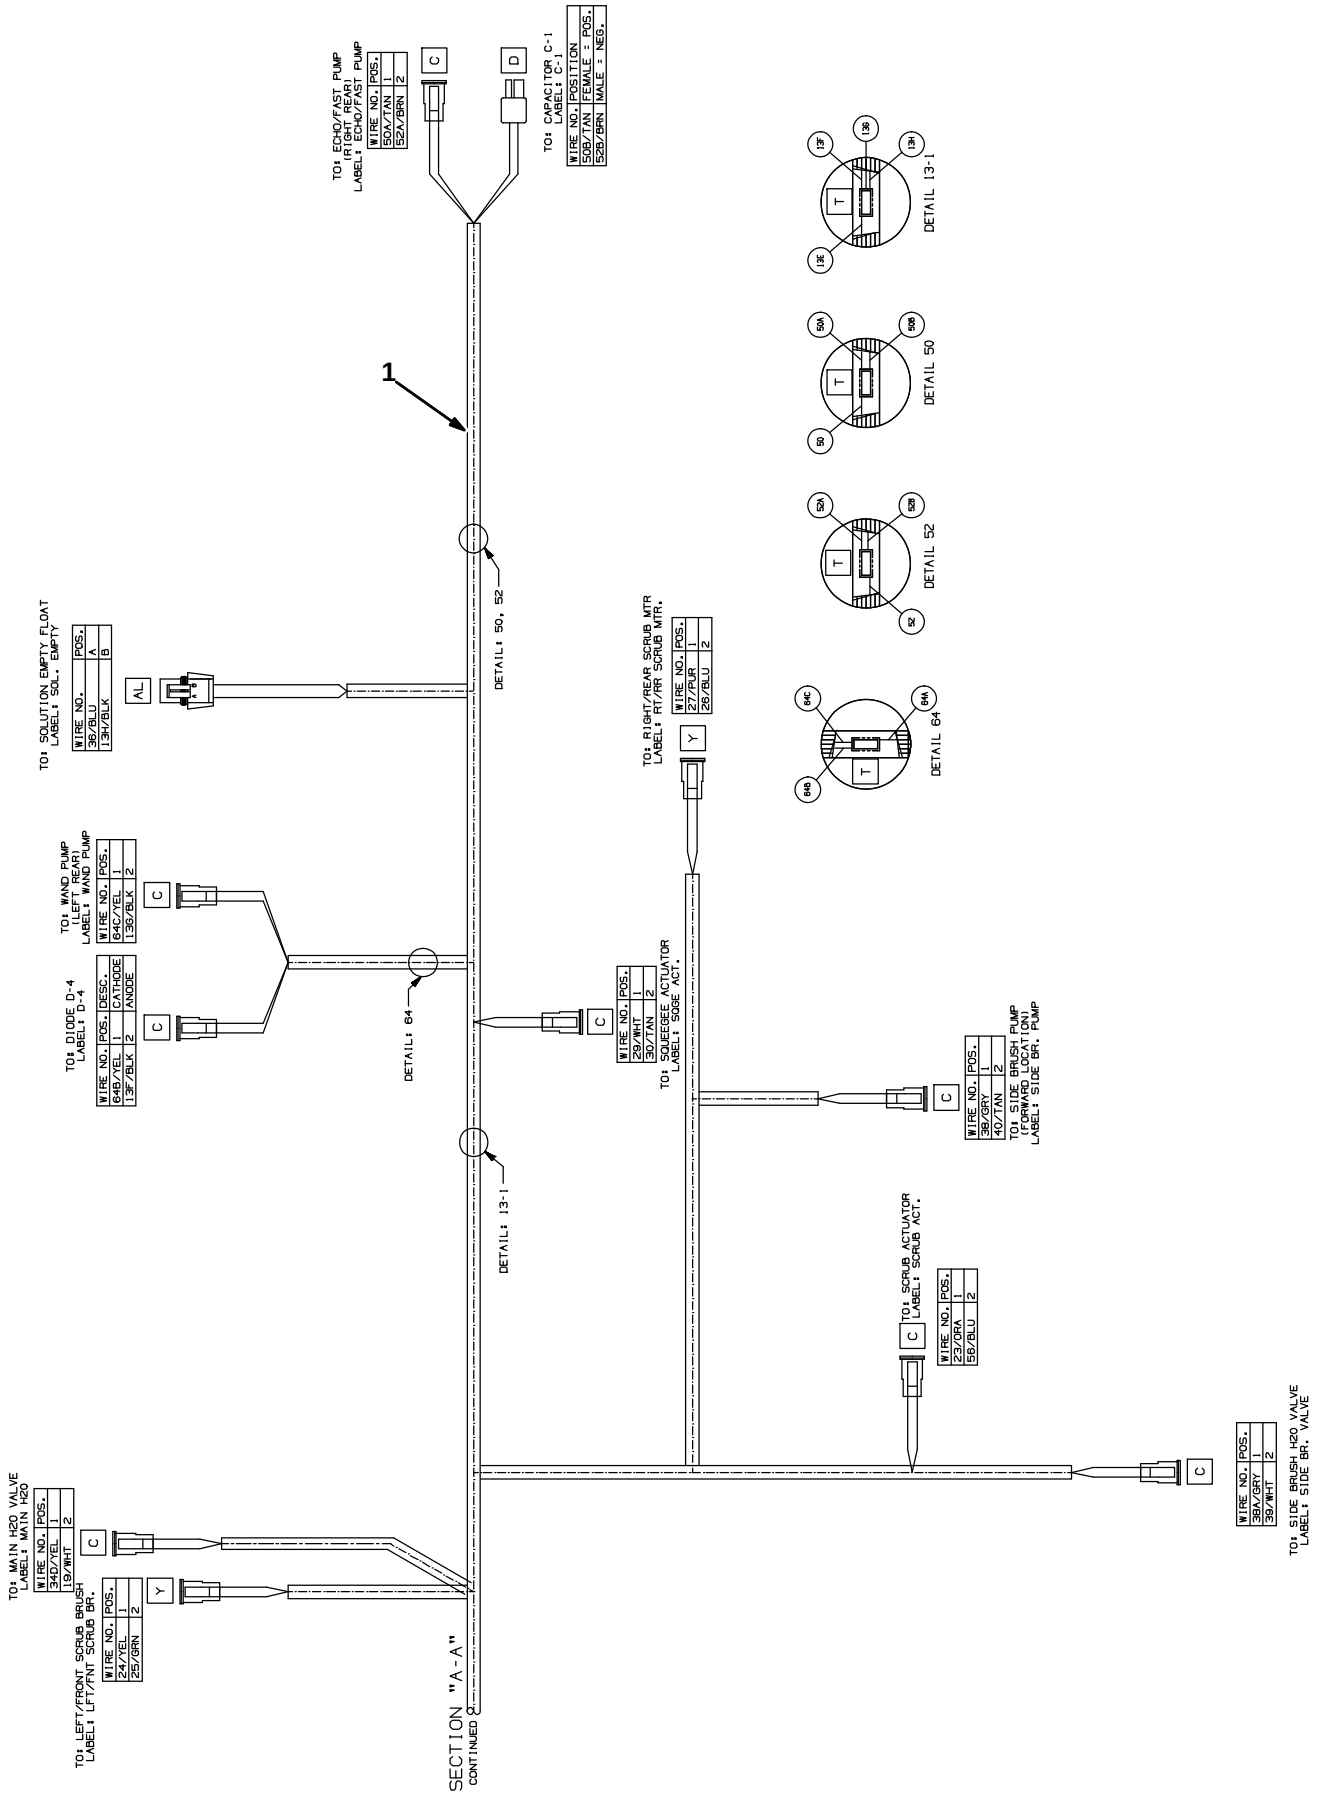

T12 9009916 (NIL)

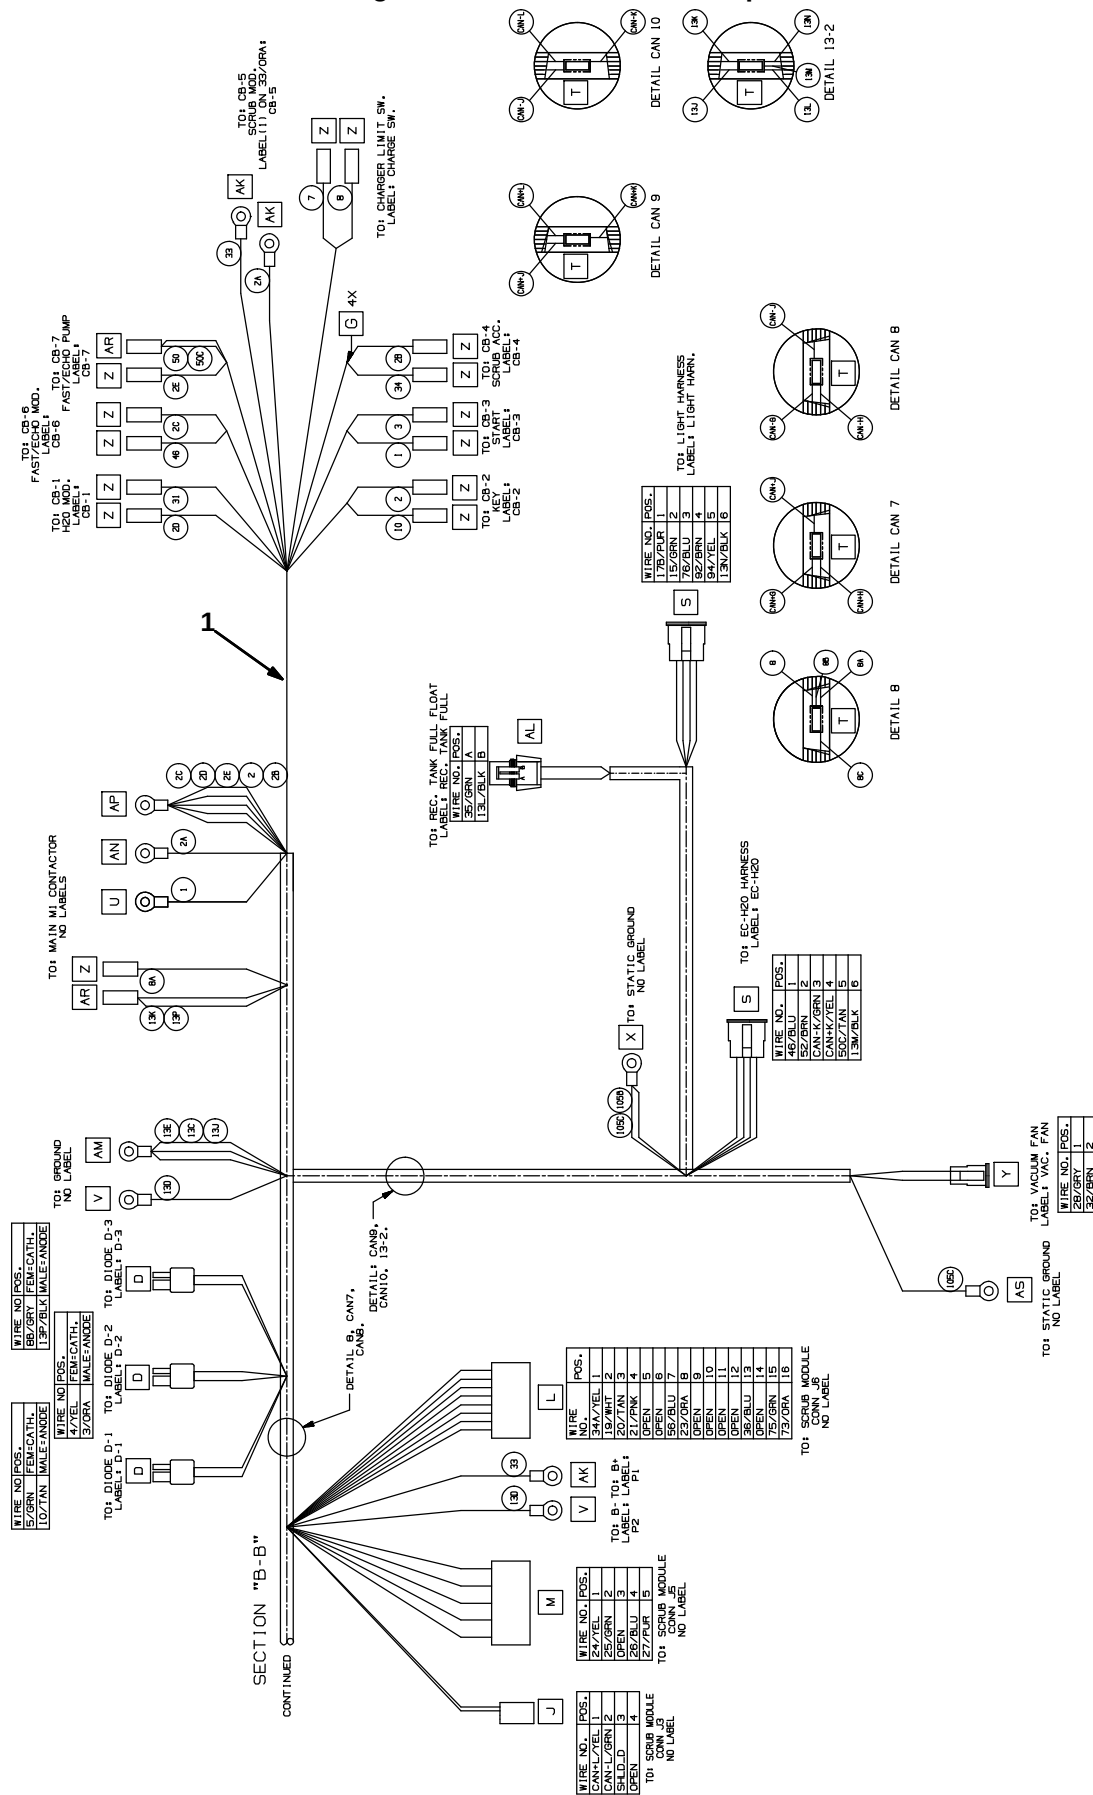

2-63


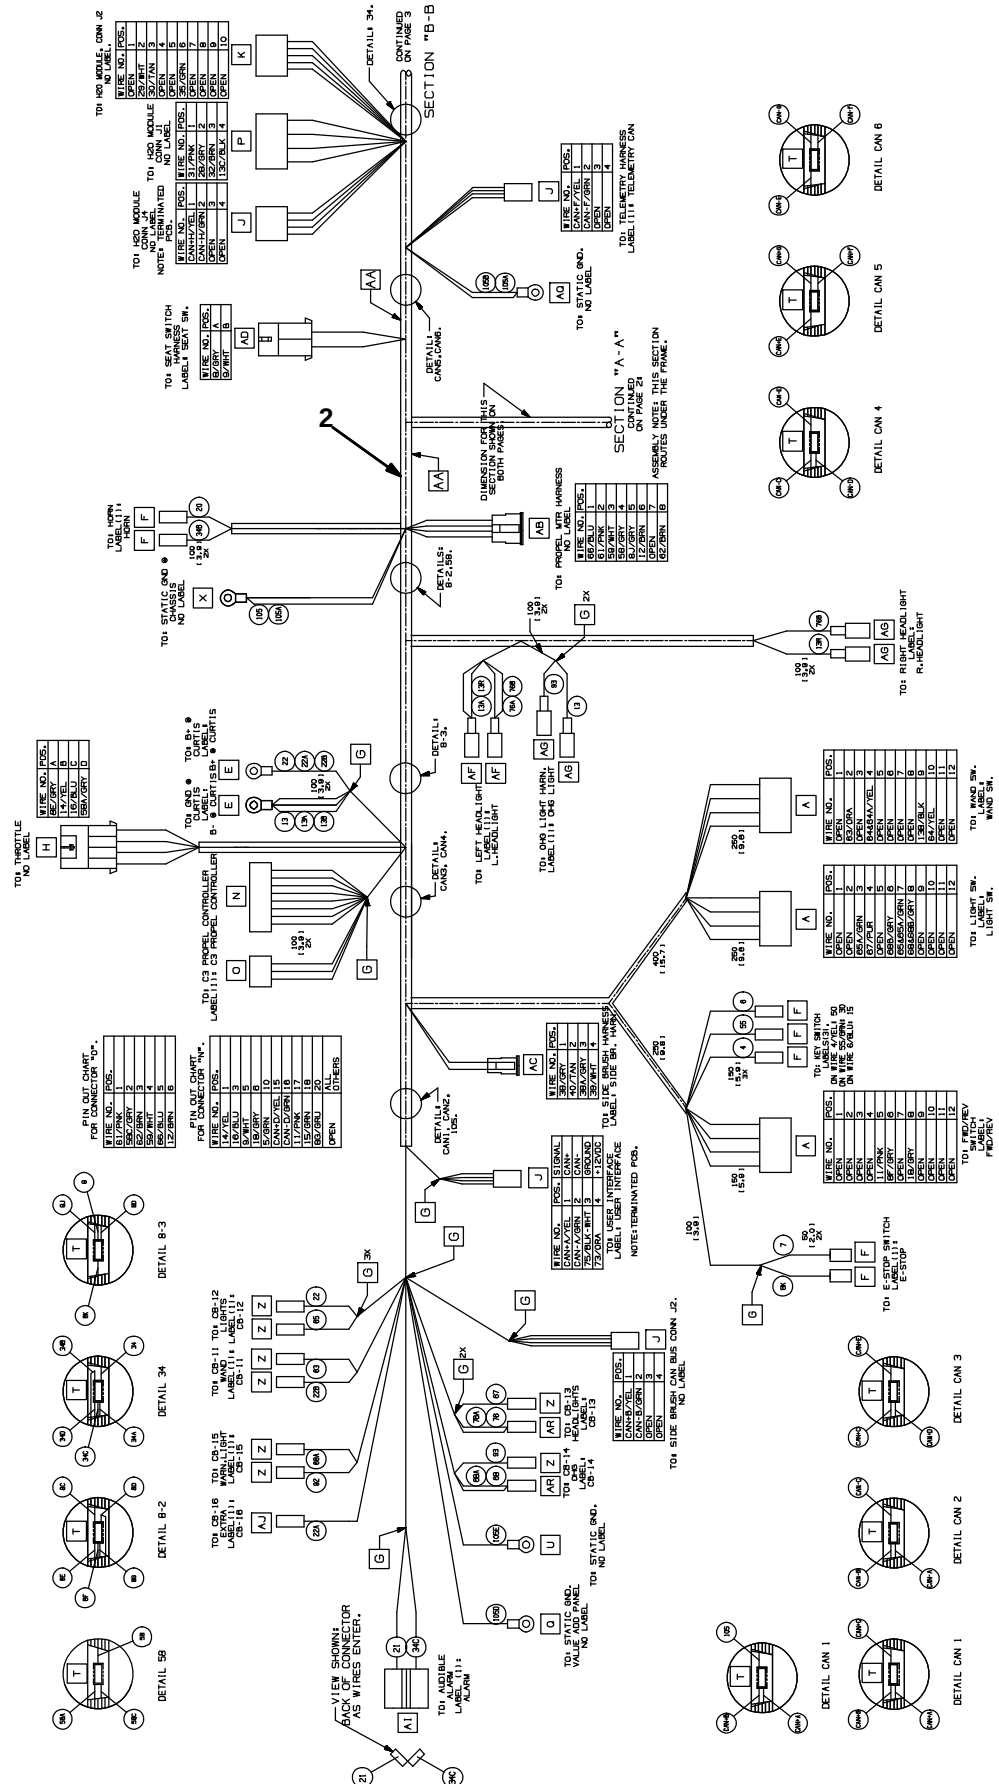


Fig. 27 – Wire Harnesses Group

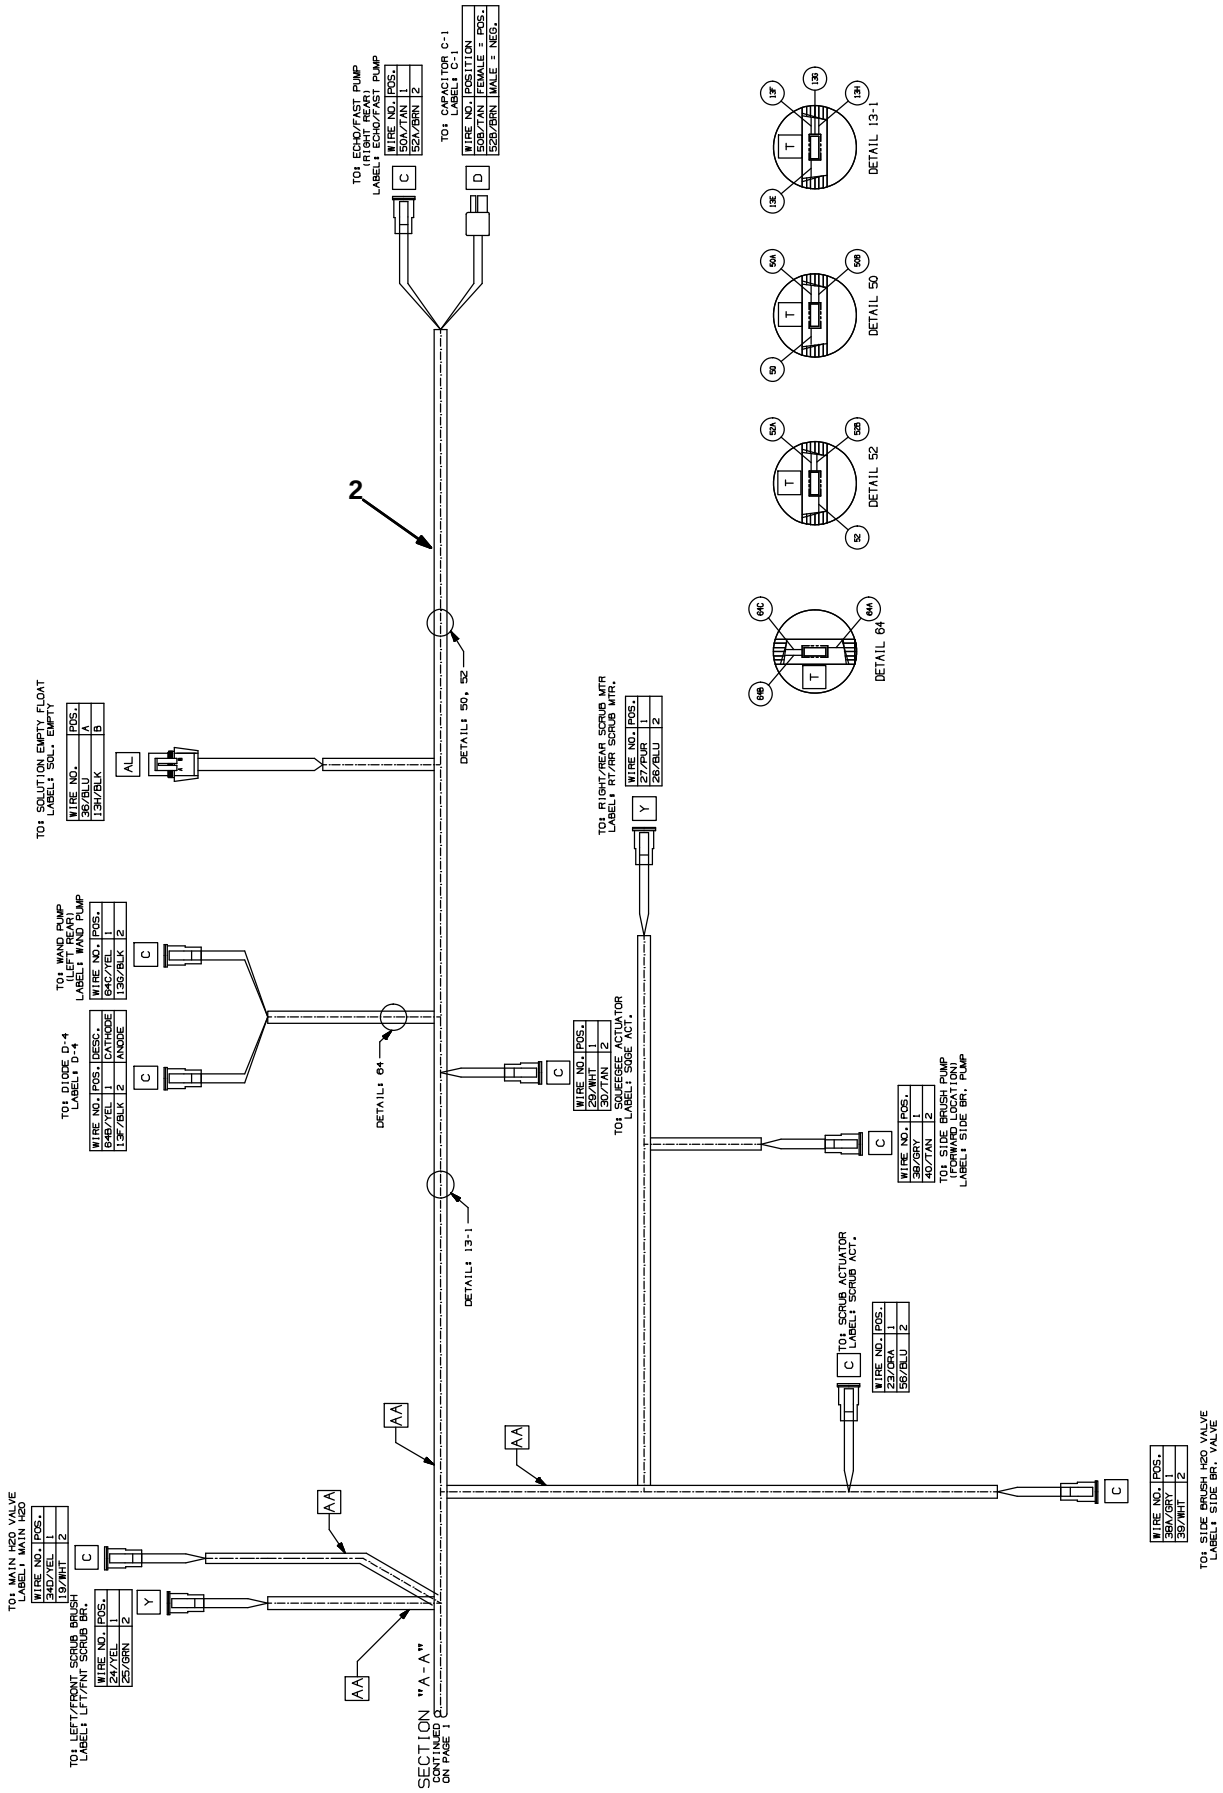

T12 9009916 (7-2013)



Fig. 27 – Wire Harnesses Group

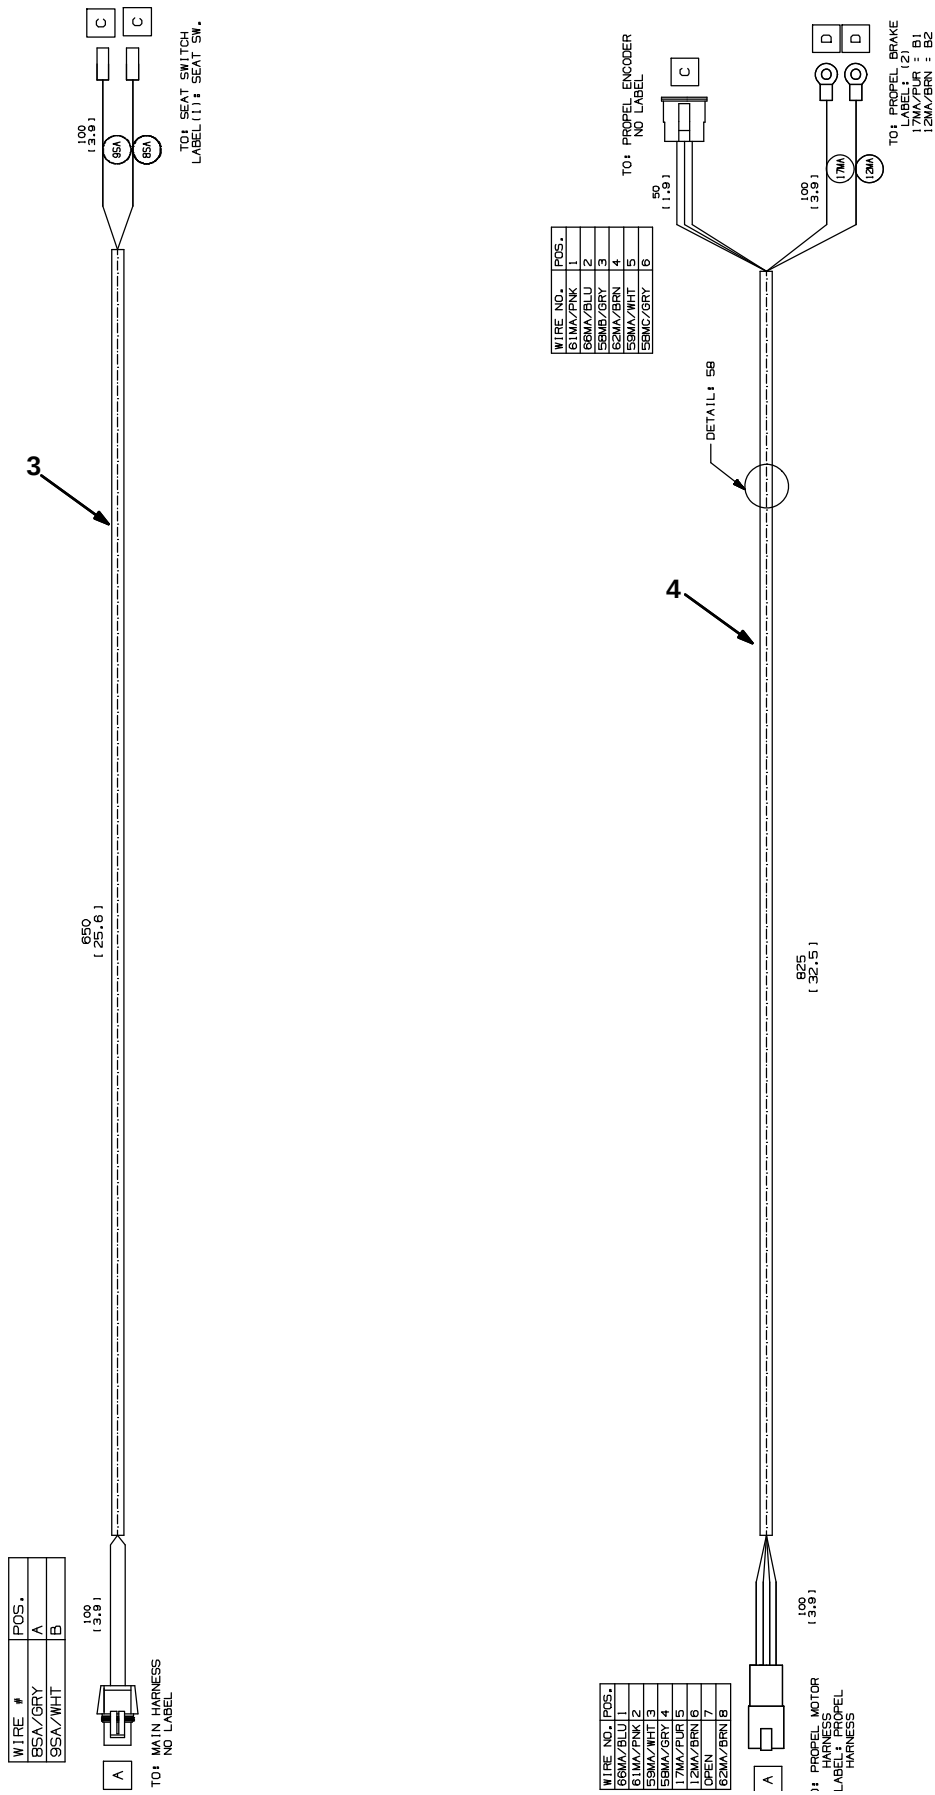


Fig. 27 – Wire Harnesses Group

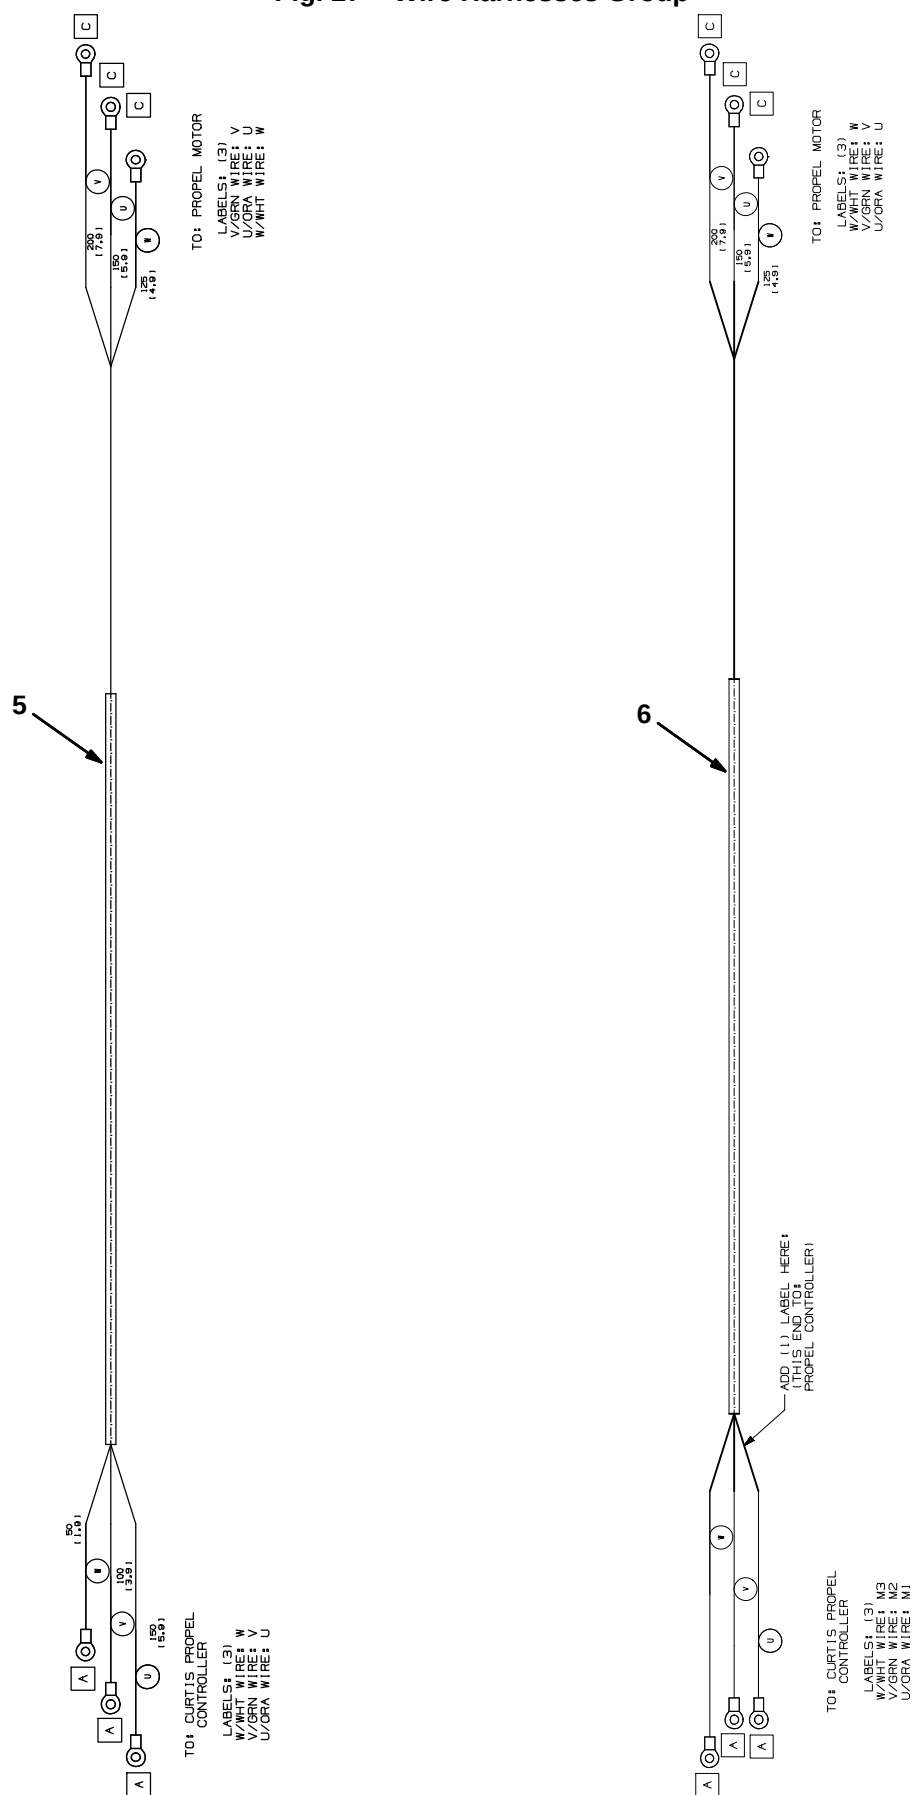


Fig. 27 – Wire Harnesses Group



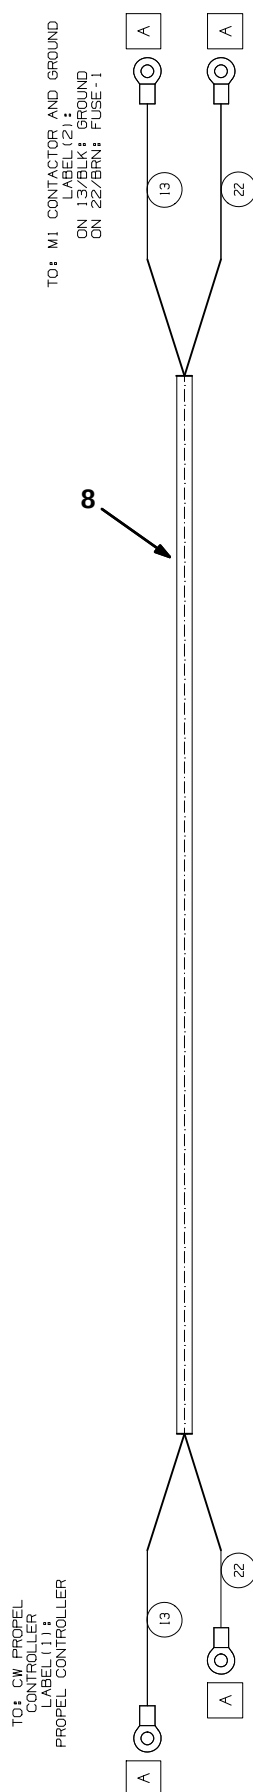


Fig. 27 – Wire Harnesses Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1069346	(10000000–10863997)	Harness, Main, Ele [T12]	1
2	1074780	(10863998–19999999)	Harness, Main, Ele [T12]	1
3	1069745	(10000000–19999999)	Harness. Ele, Seat [T12]	1
4	1069730	(10000000–19999999)	Harness, Wire, Propel Motor [T12]	1
5	1070956	(10000000–10863997)	Harness, Cable, Propel Motor [T12]	1
6	1074787	(10863998–19999999)	Harness, Cable, Propel Motor [T12]	1
7	1069891	(10000000–10863997)	Cable Assy, power [T12]	1
8	1074788	(10863998–19999999)	Cable Assy, power [T12]	1

Fig. 28 – Labels Group

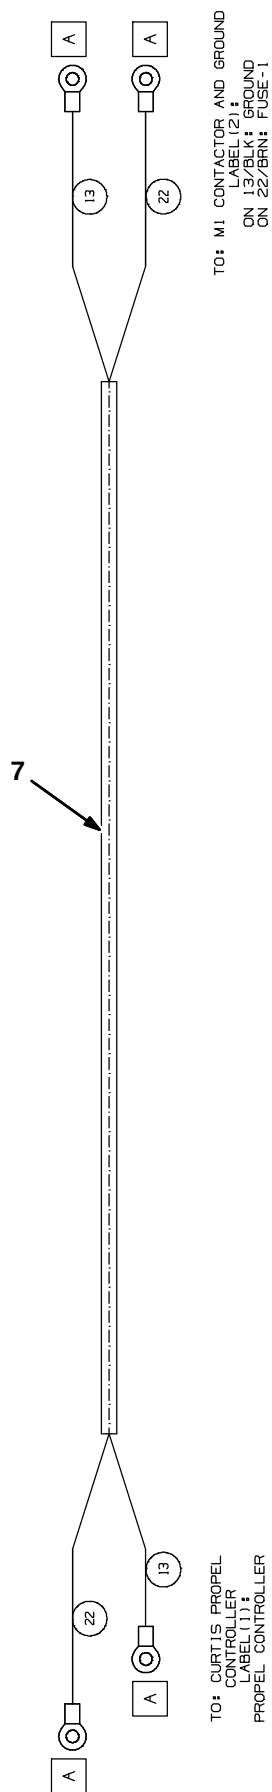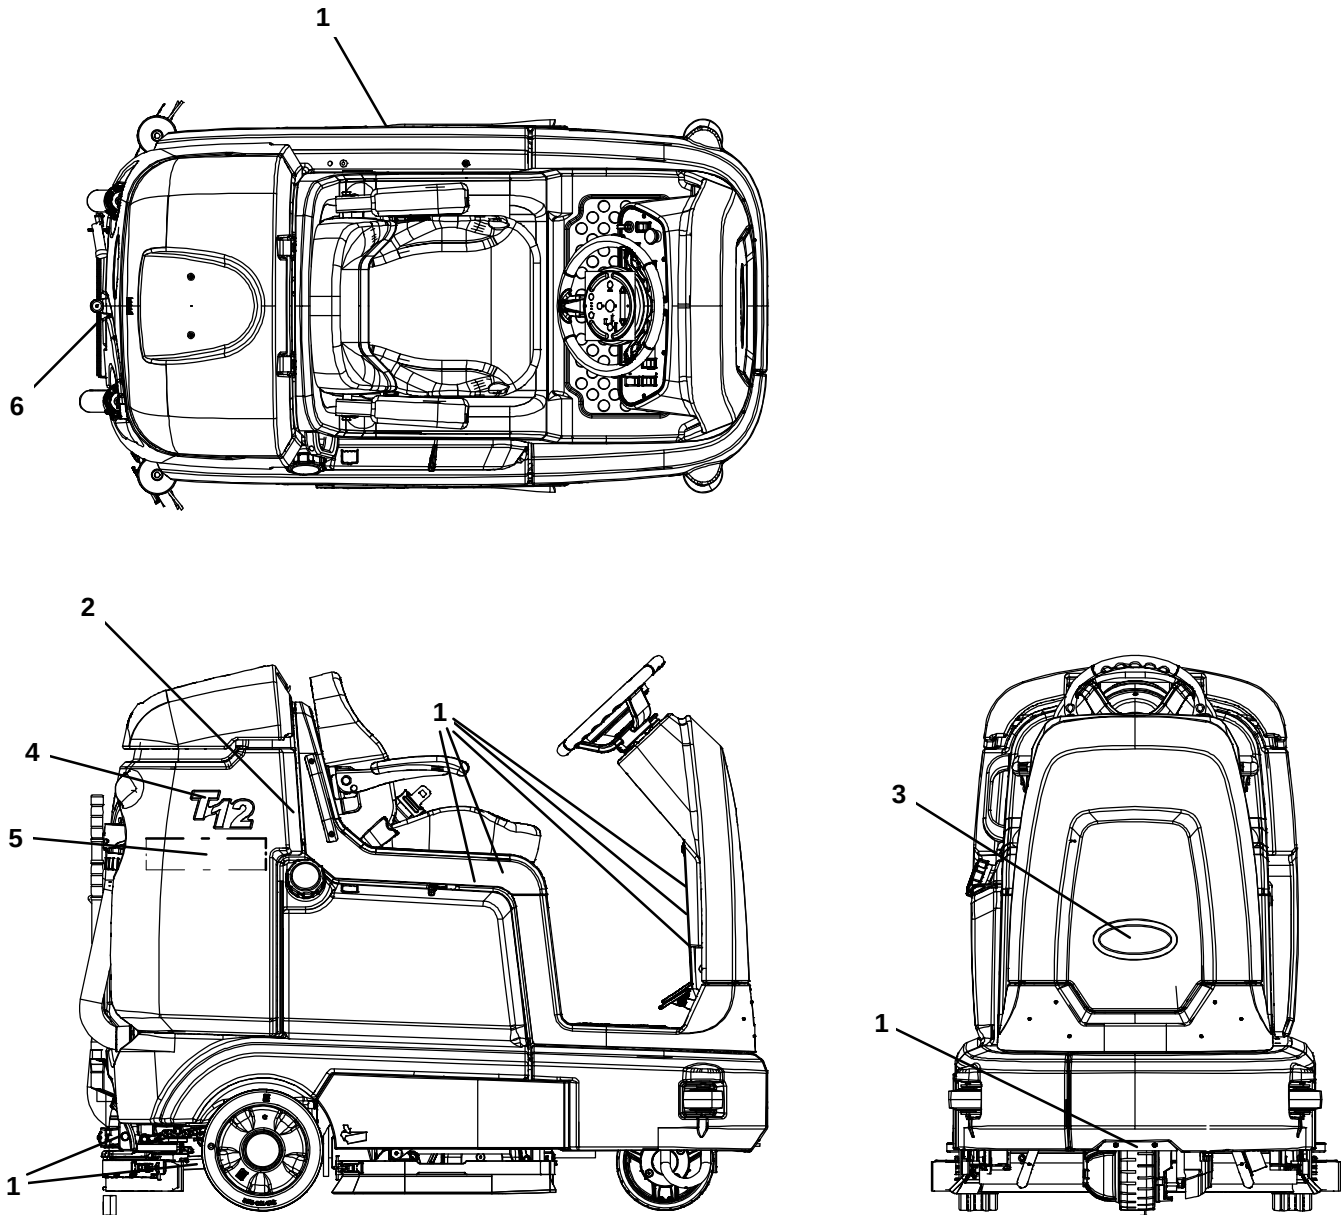

356354

Ref.	Part No.	Serial Number	Description	Qty.
1	1205741	(10000000–19999999)	Label Set, Info/Hzrd [T12]	1
1	1205743	(10000000–19999999)	Label Set, Info/Hzrd, Tj [T12] (Japan Only)	1
2	1205724	(10000000–19999999)	Label, Hzrd, Flammable Matl, Na	1
2	1067120	(10000000–19999999)	Label, Hzrd, Flammable Matl, Tj (Japan Only)	1
3	1204077	(10000000–19999999)	Nameplate, Tennant, Domed 7.0in	1
4	1205426	(10000000–19999999)	Label, Logo [T12]	2
4	1205432	(10000000–19999999)	Label, Logo [T12XP]	2
5	1062813	(10000000–19999999)	Label, Logo, 12.3l 4color [Ec–H2o]	2
6	1056578	(10000000–19999999)	Label, Logo, 05.8L Shite / TI [Tennant]	2

SECTION 3

Contents	Page
Fig. 1 – Headlight Group	3-2
Fig. 2 – Strobe Light and Backup Alarm Kit	3-4
Fig. 3 – Strobe Light Kit, Overhead Guard	3-6
Fig. 4 – Spotlight Kit, Blue	3-8
Fig. 5 – Squeegee Guard Group	3-10
Fig. 6 – Heavy Duty Bumper Kit	3-12
Fig. 7 – Overhead Guard Kit	3-14
Fig. 8 – ec-H2O Solution Pump Group	3-16
Fig. 9 – ec-H2O Solution Supply Group, Side Brush	3-18
Fig. 10 – ec-H2O Wire Harness Group	3-20
Fig. 11 – Side Brush Motor and Squeegee Group	3-22
Fig. 12 – Side Brush Pivot Group	3-24
Fig. 13 – Side Brush Bumper and Mount Group	3-26
Fig. 14 – Side Brush Solution Supply Group	3-28
Fig. 15 – Side Brush Electrical Group	3-30
Fig. 16 – Side Brush Wire Harness Group	3-32
Fig. 17 – Spray Hose Kit	3-34
Fig. 18 – Vacuum Wand Kit	3-36
Fig. 19 – Telemetry Group (S/N 10000000–10967790)	3-38
Fig. 20 – Telemetry Group (S/N 10967791–19999999)	3-40
Fig. 21 – Telemetry Group, Lithium-Ion Battery (S/N 10967791–19999999)	3-42
Fig. 22 – Battery Group, 36V 360Ah	3-44
Fig. 23 – Battery Group, 36V 312Ah	3-46
Fig. 24 – Battery Group, Lithium-Ion, 36V, 10.2 Kwh	3-48
Fig. 25 – Battery Group, Lithium-Ion, 36V, 8.2 Kwh	3-50
Fig. 26 – Battery Group, Lithium-Ion, 36V, 4.1 Kwh	3-52
Fig. 27 – Lithium-Ion Battery Lifting Kit	3-54
Fig. 28 – Battery Charger Group	3-55
Fig. 29 – Battery Charger Group	3-56
Fig. 30 – Battery Charger Group, International Only	3-57
Fig. 31 – Battery Charger Group	3-58
Fig. 32 – Battery Chargers Group, Lithium-Ion	3-59
Fig. 33 – On-Board Charger Kit	3-60
Fig. 34 – On-Board Charger Group, International	3-62
Fig. 35 – On-Board Battery Charger Group, Lithium-Ion	3-64
Fig. 36 – Flow-Ritet Battery Water Manifold Kit	3-66
Fig. 37 – HydrolinkR Battery Watering System Kit	3-67
Fig. 38 – Manual Battery Watering System Kit	3-68
Fig. 39 – Transport Group	3-69
Fig. 40 – Fire Extinguisher Group	3-70
Fig. 41 – Documentation Group	3-71

Fig. 1 – Headlight Group

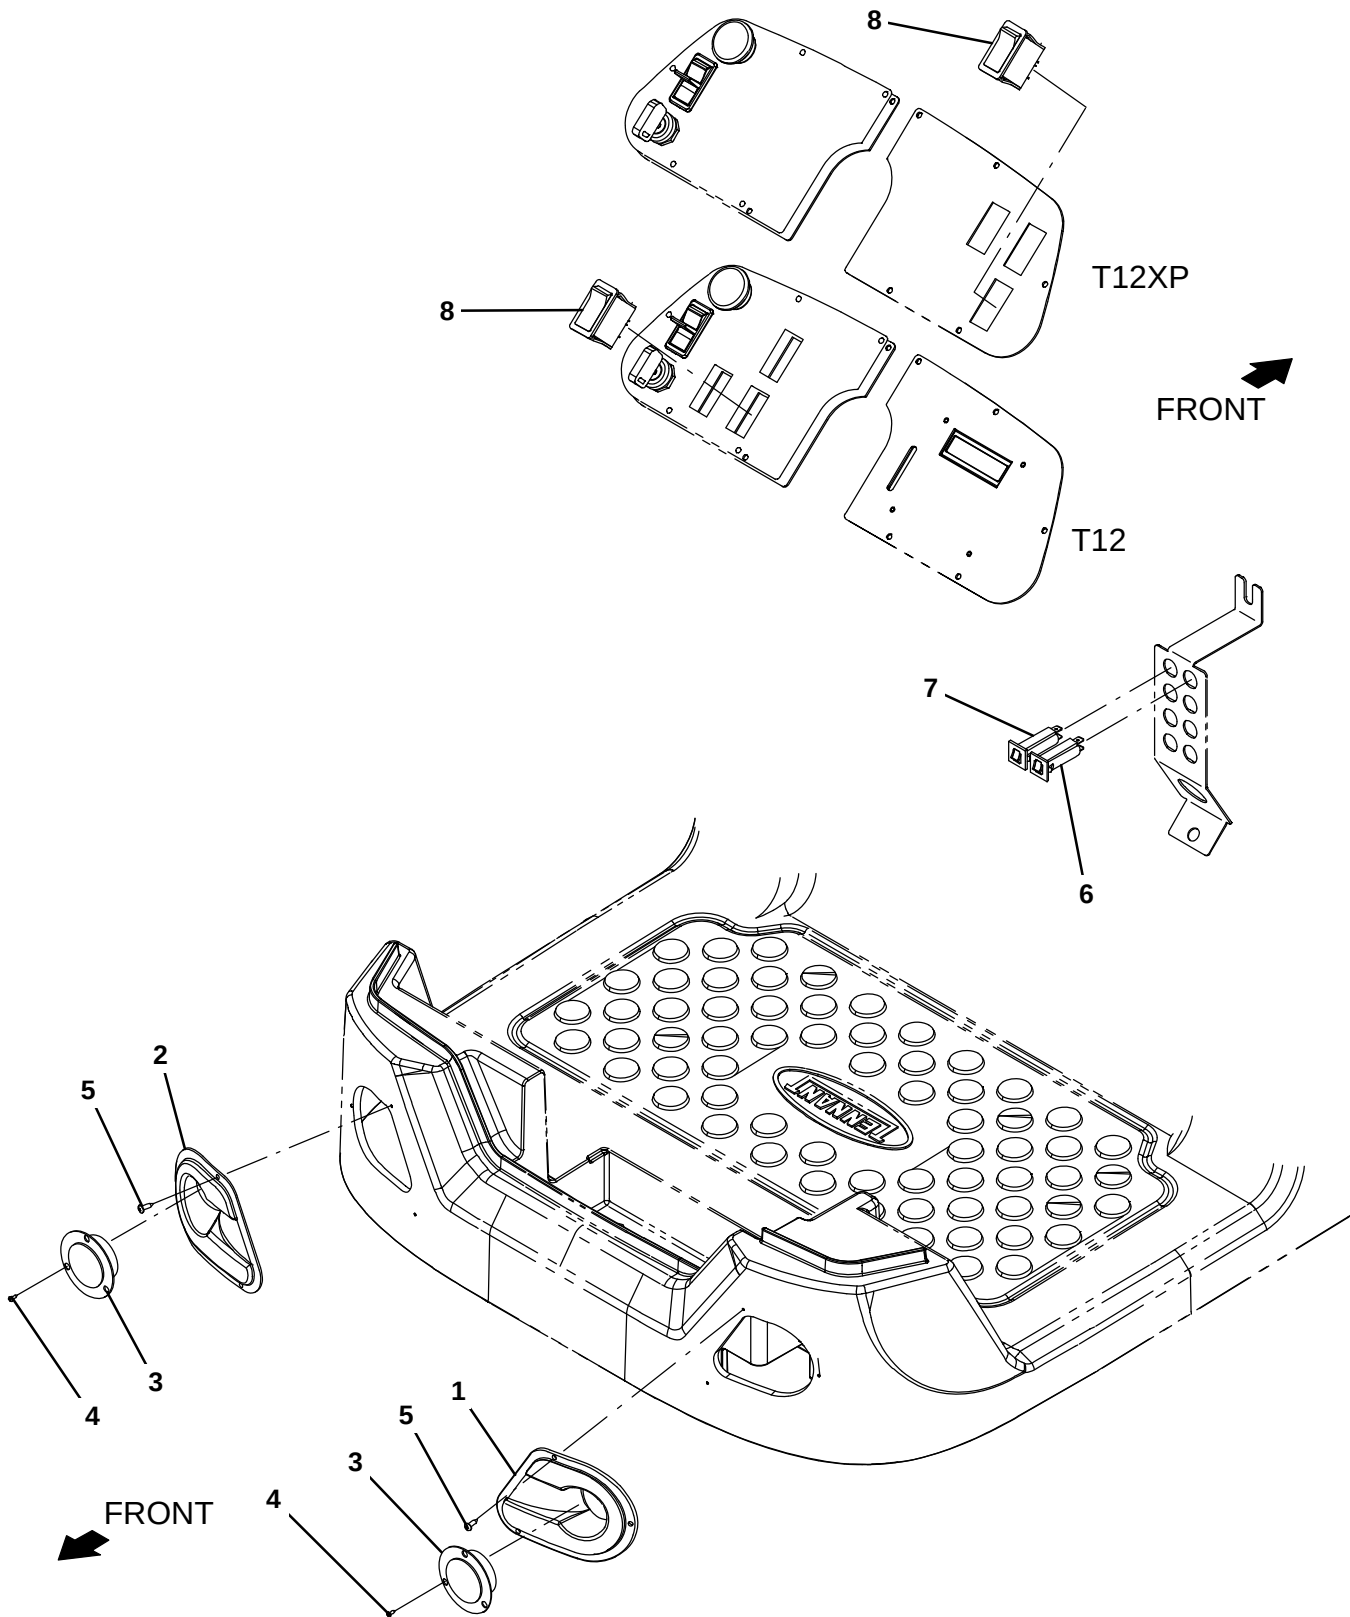


Fig. 1 – Headlight Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1202870	(10000000–19999999)	Bezel, Headlight, Lh [W/Inserts]	1
2	1202892	(10000000–19999999)	Bezel, Headlight, Rh [W/Inserts]	1
3	9008182	(10000000–19999999)	Light Assy, Pre–Sweep, Afmkt	2
4	06920	(10000000–19999999)	Screw, Pan, Phl, M3 X 0.50 X 10, 4.8	6
5	140825	(10000000–19999999)	Screw, Pan, Phl, 06 X 0.50, Fmg/Ab, Blk	6
6	1064184	(10000000–19999999)	Circuitbreaker, 02.5a, Resetable	1
7	1064188	(10000000–19999999)	Circuitbreaker, 15.0a, Resetable	1
8	377084	(10000000–19999999)	Switch, Rocker, Prgrsv	1

Fig. 2 – Strobe Light and Backup Alarm Kit

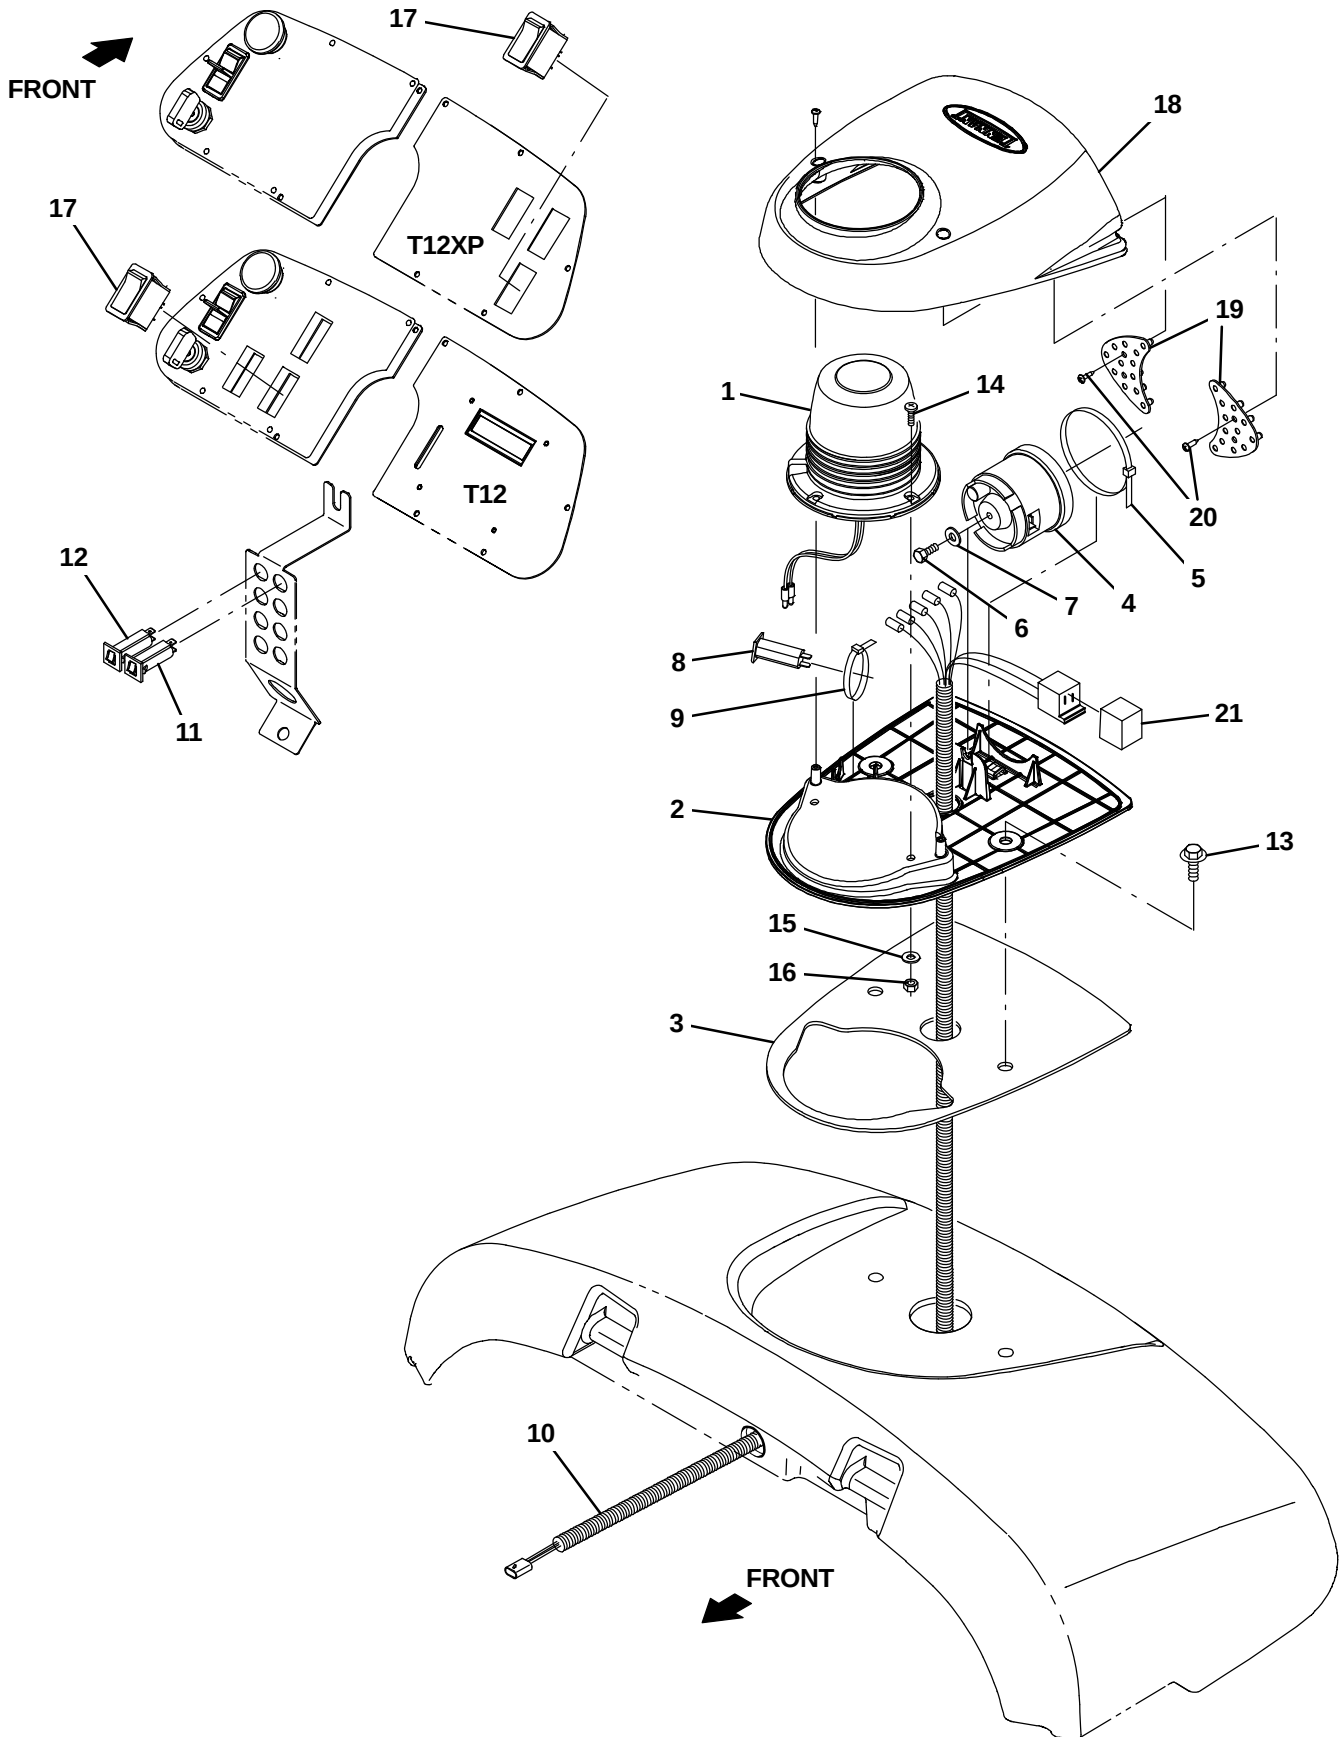


Fig. 2 – Strobe Light and Backup Alarm Kit

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9010353	(10000000-19999999)	Light kit, Strobe, Module, Ci [T12]	1
▲	1	1075296	(10000000-19999999)	Light, Flsh, 12Vdc, Amb, Rwk	1
▲	2	1059938	(10000000-19999999)	Base, Module, Light	1
▲	3	1063263	(10000000-19999999)	Gasket, Base, Module	1
▲	4	1058694	(10000000-19999999)	Alarm, Backup, 12-48vdc, Adj	1
▲	5	49263	(10000000-19999999)	Tie, Cable, Nyl, 11.4l .19w 3.0 Max D	1
▲	6	19315	(10000000-19999999)	Screw, Hex, .25-20 X 0.50, G5	1
▲	7	32483	(10000000-19999999)	Washer, Flat, 0.25, Sae	1
▲	8	1064184	(10000000-19999999)	Circuitbreaker, 02.5a, Resetable	1
▲	9	49266	(10000000-19999999)	Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	1
▲	10	1056979	(10000000-19999999)	Harness, Wire, Alarm / Light [T16]	1
▲	11	1064184	(10000000-19999999)	Circuitbreaker, 02.5a, Resetable	1
▲	12	1064188	(10000000-19999999)	Circuitbreaker, 15.0a, Resetable	1
▲	13	1020341	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
▲	14	06933	(10000000-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, 4.8	2
▲	15	19066	(10000000-19999999)	Washer, Flat, 0.25b 0.56d .05, Pl, 10	2
▲	16	06549	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI	2
▲	17	377084	(10000000-19999999)	Switch, Rocker, Prgrsv	1
▲	18	1062106	(10000000-19999999)	Cover, Module, Light	1
▲	19	1059342	(10000000-19999999)	Light Assy, Led	1
▲	20	222267	(10000000-19999999)	Screw, Pan, Phl, 06-20 X 0.50, Fmg/Ab	6
▲	21	398526	(10000000-19999999)	Relay, 36Vdc, 005A, Spdt No [Greenwich]	1

Fig. 3 – Strobe Light Kit, Overhead Guard

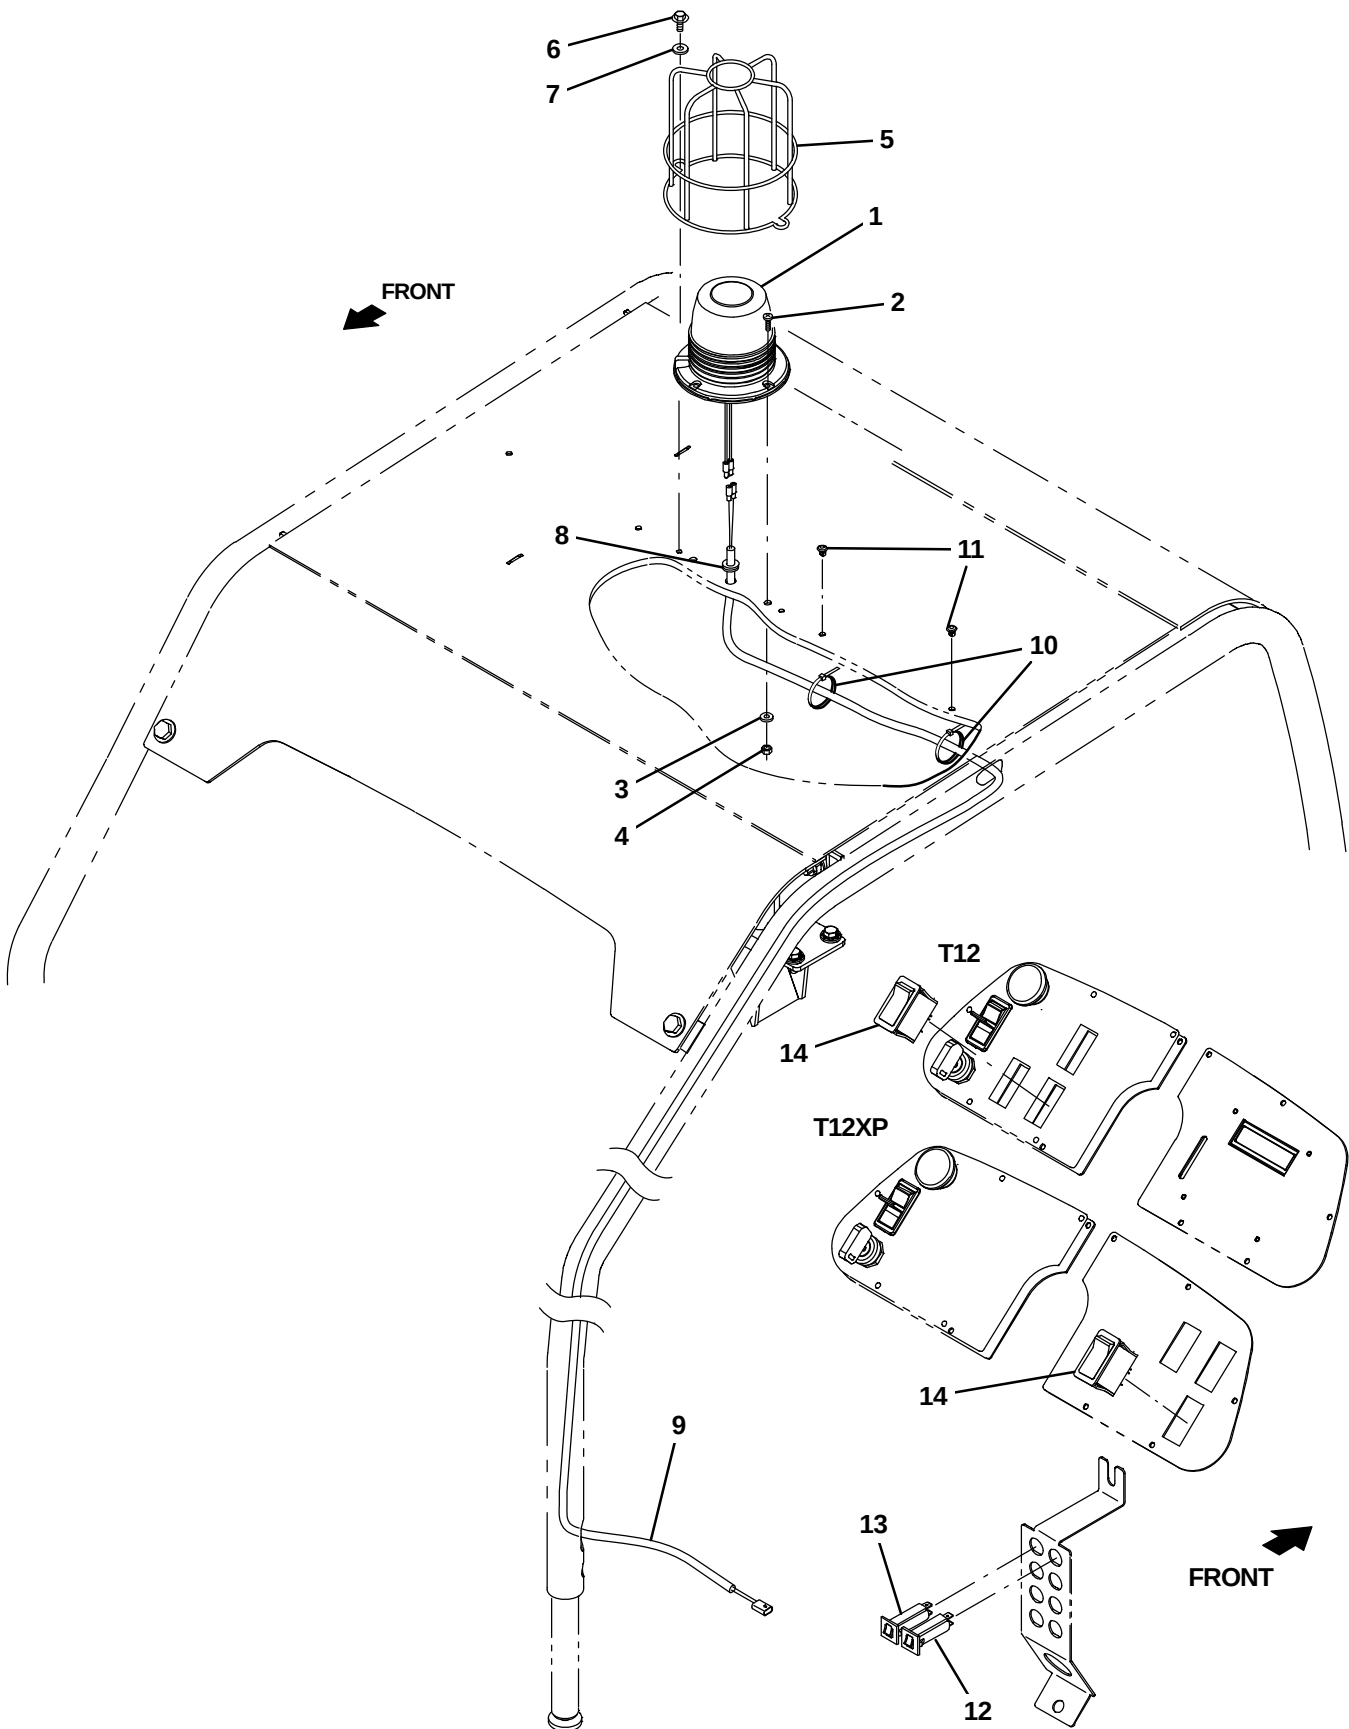


Fig. 3 – Strobe Light Kit, Overhead Guard

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9010351	(10000000-19999999)	Light Kit, Warning, Ohg, Ci [T12]	1
▲	1	1075296	(10000000-19999999)	Light, Flsh, 12Vdc, Amb, Rwk	1
▲	2	06933	(10000000-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, 4.8	2
▲	3	19066	(10000000-19999999)	Washer, Flat, 0.25b 0.56d .05, Pl, 10	2
▲	4	06549	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI	2
▲	5	1039392	(10000000-19999999)	Guard, Light, Revl / Strobe	1
▲	6	74455	(10000000-19999999)	Screw, Hex, M6 X 1.00 X 12, Fmg	2
▲	7	32490	(10000000-19999999)	Washer, Flat, 0.25, Std	2
▲	8	10632-2	(10000000-19999999)	Grommet, Rbr, 0.62id, F/0.9h, .12 Matl	1
▲	9	1069746	(10000000-19999999)	Harness, Ele, Ohg [T12]	1
▲	10	130773	(10000000-19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	2
▲	11	1202868	(10000000-19999999)	Clip, Tie, 0.25d, Plstc	2
▲	12	1064184	(10000000-19999999)	Circuitbreaker, 02.5a, Resetable	1
▲	13	1064188	(10000000-19999999)	Circuitbreaker, 15.0a, Resetable	1
▲	14	377084	(10000000-19999999)	Switch, Rocker, Prgrsv	1

Fig. 4 – Spotlight Kit, Blue

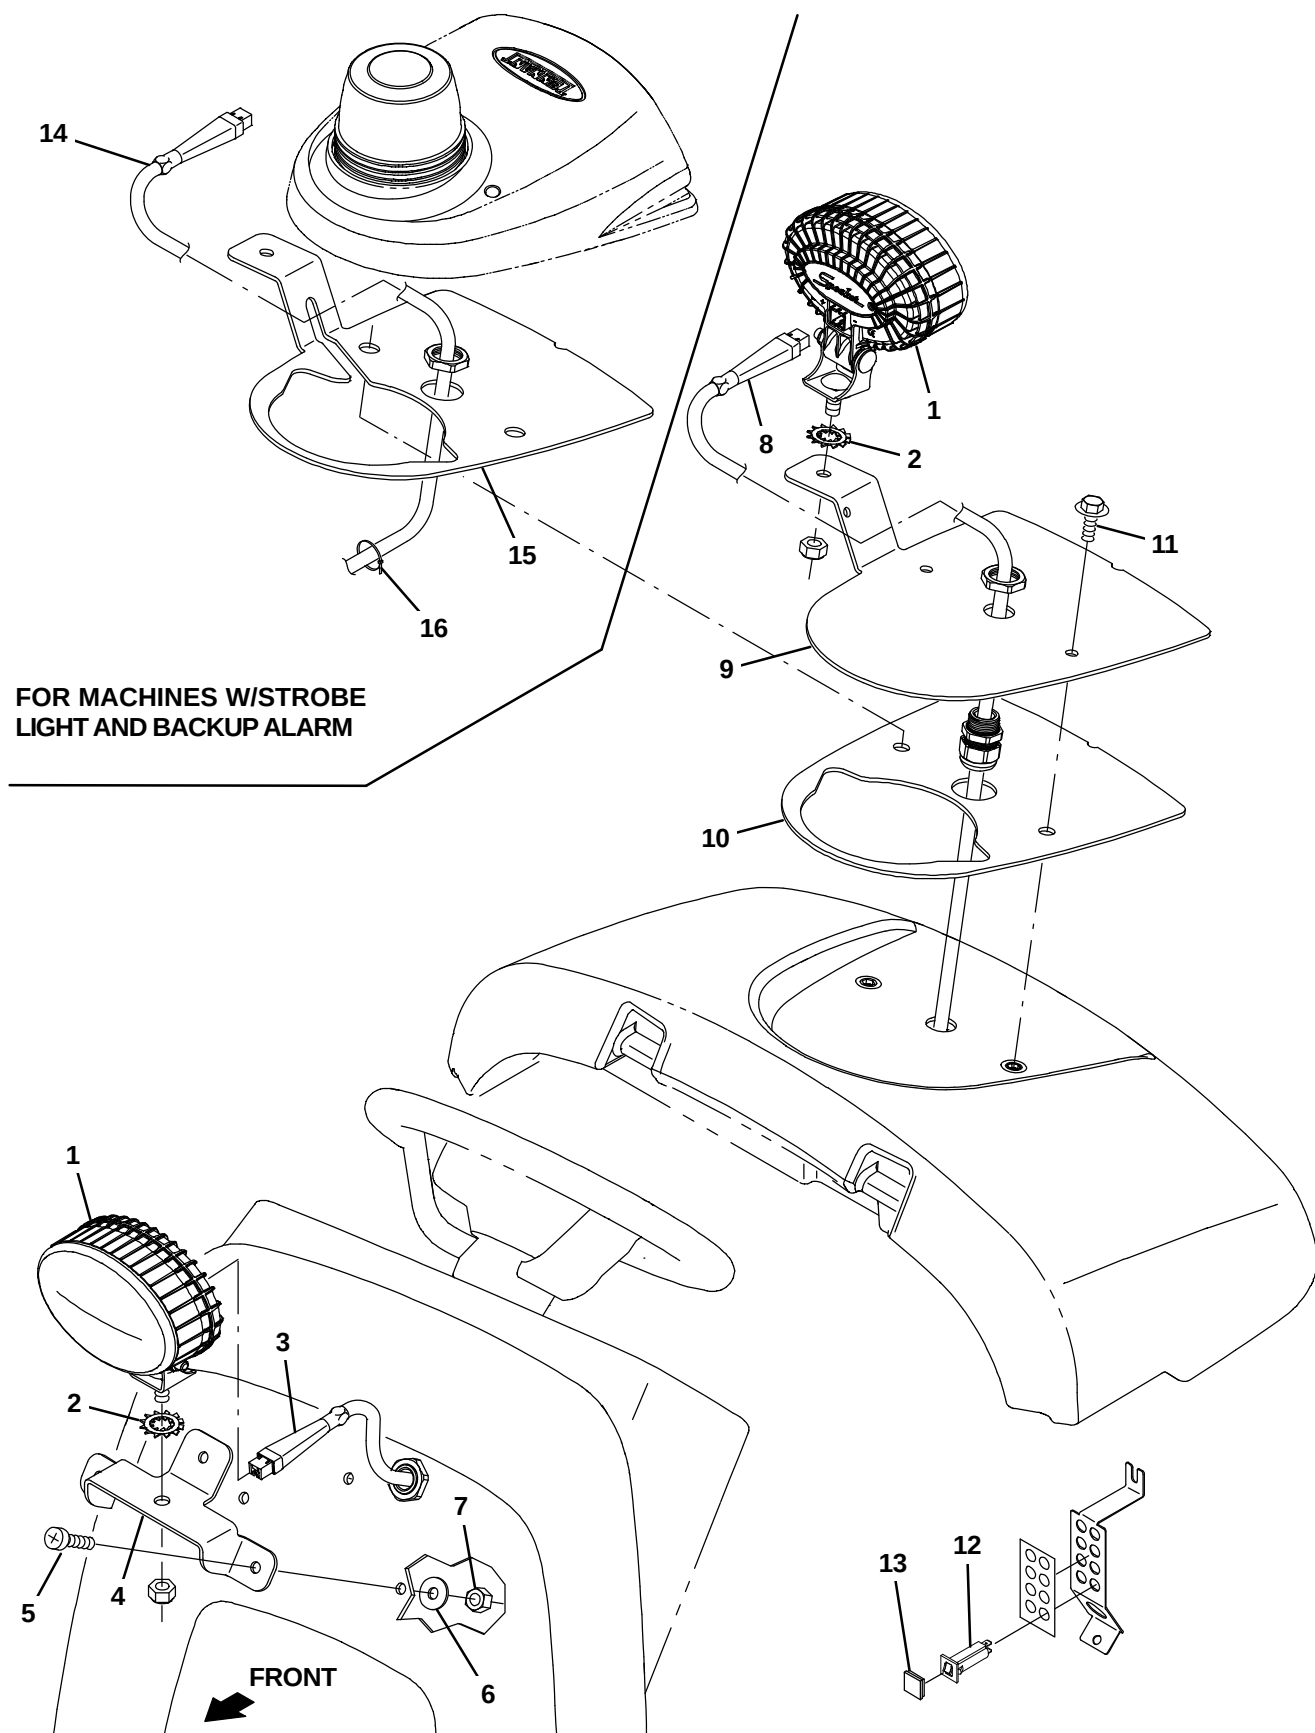


Fig. 4 – Spotlight Kit, Blue

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9020972	(10000000–19999999)	Spotlight Kit, Blue, Ci [T12/T16]	1
▲	1	1240687	(10000000–19999999)	Light, Spot, Blue, Led	2
▲	2	41143	(10000000–19999999)	Washer, Lock, Int–Ext, 0.50	2
▲	3	1254712	(10000000–19999999)	Harness, Blu Spotlight, Front	1
▲	4	1076808	(10000000–19999999)	Brkt, Blu Spotlight, Fr, Cover Mtg	1
▲	5	1031665	(10000000–19999999)	Screw, Pan, M8 X 1.25 X 25, Blk	3
▲	6	39890	(10000000–19999999)	Washer, Flat, M8, Fendr	3
▲	7	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	3
▲▽	8	1257237	(10000000–19999999)	Harness, Blu Spotlight, Rear	1
▲▲		1016029	(10000000–19999999)	Fuse, Blade, 005a, 32vdc [Atof]	1
▲	9	1077103	(10000000–19999999)	Brkt, Blu Spotlight, Rr, Cover Mtg	1
▲	10	1063263	(10000000–19999999)	Gasket, Base, Module	1
▲	11	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
▲	12	1064184	(10000000–19999999)	Circuitbreaker, 02.5a, Resetable	1
▲	13	1064191	(10000000–19999999)	Boot, Circuitbreaker	1
▲▽	14	1256917	(10000000–19999999)	Harness, Blu Spotlight, Rear	1
▲▲		1016029	(10000000–19999999)	Fuse, Blade, 005a, 32vdc [Atof]	1
▲	15	1076810	(10000000–19999999)	Brkt, Blu Spotlight, Rr, Cover Mtg	1
▲	16	763114	(10000000–19999999)	Tie, Cable, 11.43l, 2.75d Max	10

Fig. 5 – Squeegee Guard Group

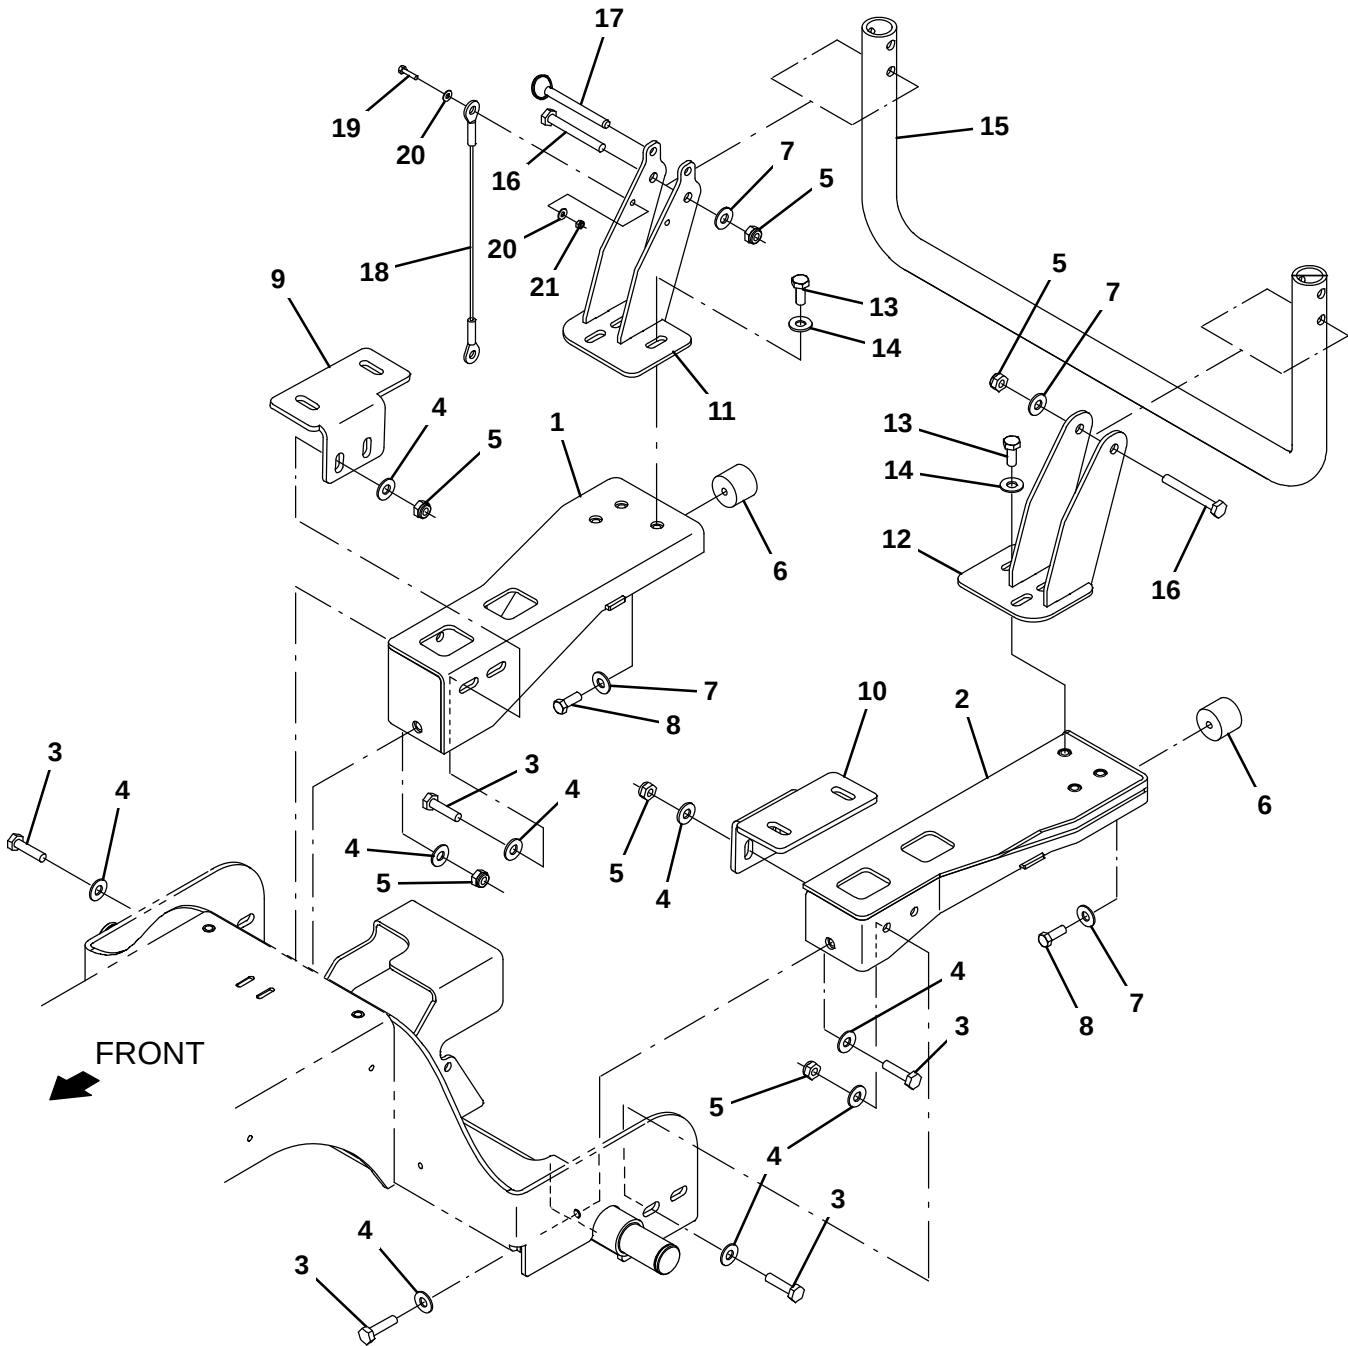


Fig. 5 – Squeegee Guard Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1201496	(10000000-19999999)	Channel Wldt, Bumper, Rh	1
2	1201503	(10000000-19999999)	Channel Wldt, Bumper, Lh	1
3	12317	(10000000-19999999)	Screw, Hex, M10 X 1.50 X 30, Ss	10
4	01686	(10000000-19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	18
5	08714	(10000000-19999999)	Nut, Hex, Lock, M10 X 1.5, NI, Ss	8
6	1024977	(10000000-19999999)	Bumper, Ure, 1.50d 1.25l	2
7	32492	(10000000-19999999)	Washer, Flat, 0.38, Std	4
8	69225	(10000000-19999999)	Screw, Hex, .38-16 X 1.00, Ss	2
9	1201499	(10000000-19999999)	Bracket, Support, Tank, Rh	1
10	1201504	(10000000-19999999)	Bracket, Support, Tank, Lh	1
11	1202246	(10000000-19999999)	Support Wldt, Guard, Rh	1
12	1202247	(10000000-19999999)	Support Wldt, Guard, Lh	1
13	09028	(10000000-19999999)	Screw, Hex, M10 X 1.50 X 25, Ss	6
14	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	6
15	1204847	(10000000-19999999)	Tube, Guard, Pntd	1
16	06965	(10000000-19999999)	Screw, Hex, M10 X 1.50 X 80, 8.8	2
17	369359	(10000000-19999999)	Pin, Hitch, .375d X 3.12l, PI	1
18	19676	(10000000-19999999)	Cable, Glv .09d 013.0l .38eye /.38eye	1
19	09252	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 20, 8.8	1
20	01683	(10000000-19999999)	Washer, Flat, 10, Ss	2
21	09739	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	1

Fig. 6 – Heavy Duty Bumper Kit

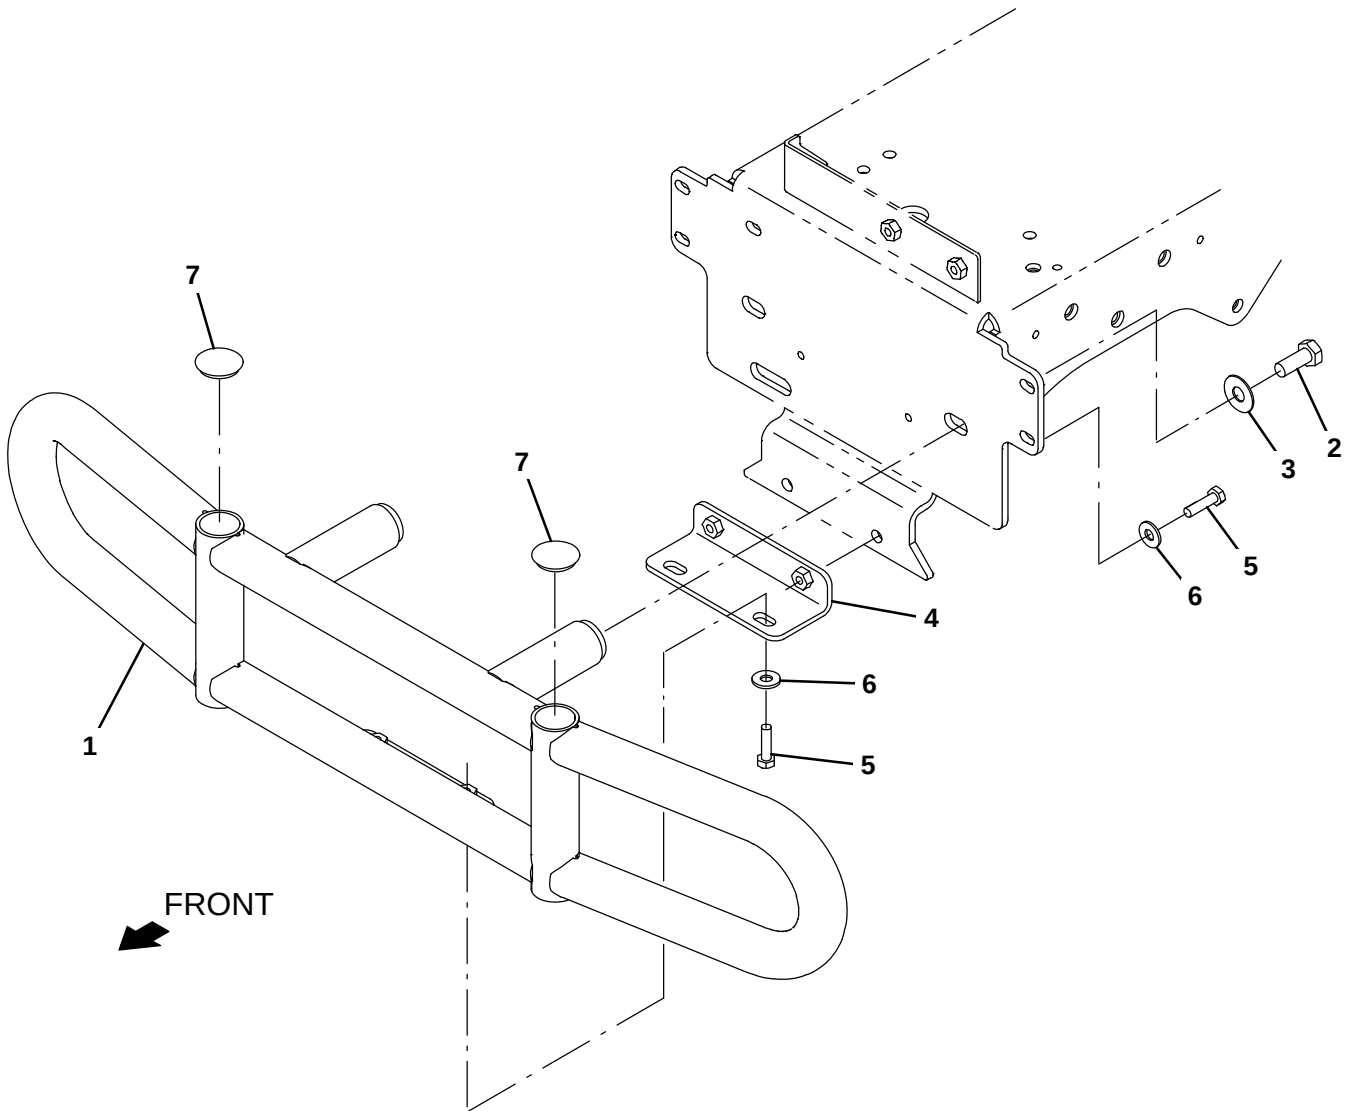


Fig. 6 – Heavy Duty Bumper Kit

NOTE: Overhead Guard Kit (including Heavy Duty Bumper), Tennant Part Number 9009861, includes; Fig. 6 and Fig. 7.

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009857	(10000000–19999999)	Bumper Kit, Front, Hd, Ci [T12]	1
▲	1	1201452	(10000000–19999999)	Tube Wldt, Bmpr	1
▲	2	12309	(10000000–19999999)	Screw, Hex, M12 X 1.75 X 30, Ss	2
▲	3	140045	(10000000–19999999)	Washer, Flat, 0.51b 1.25d .06, Ss	2
▲	4	1201061	(10000000–19999999)	Bracket Wldt, Bumper	1
▲	5	09011	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	4
▲	6	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	4
▲	7	1010399	(10000000–19999999)	Plug, Hole, Rnd, 1.25h .18, Blk Stl	2

Fig. 7 – Overhead Guard Kit

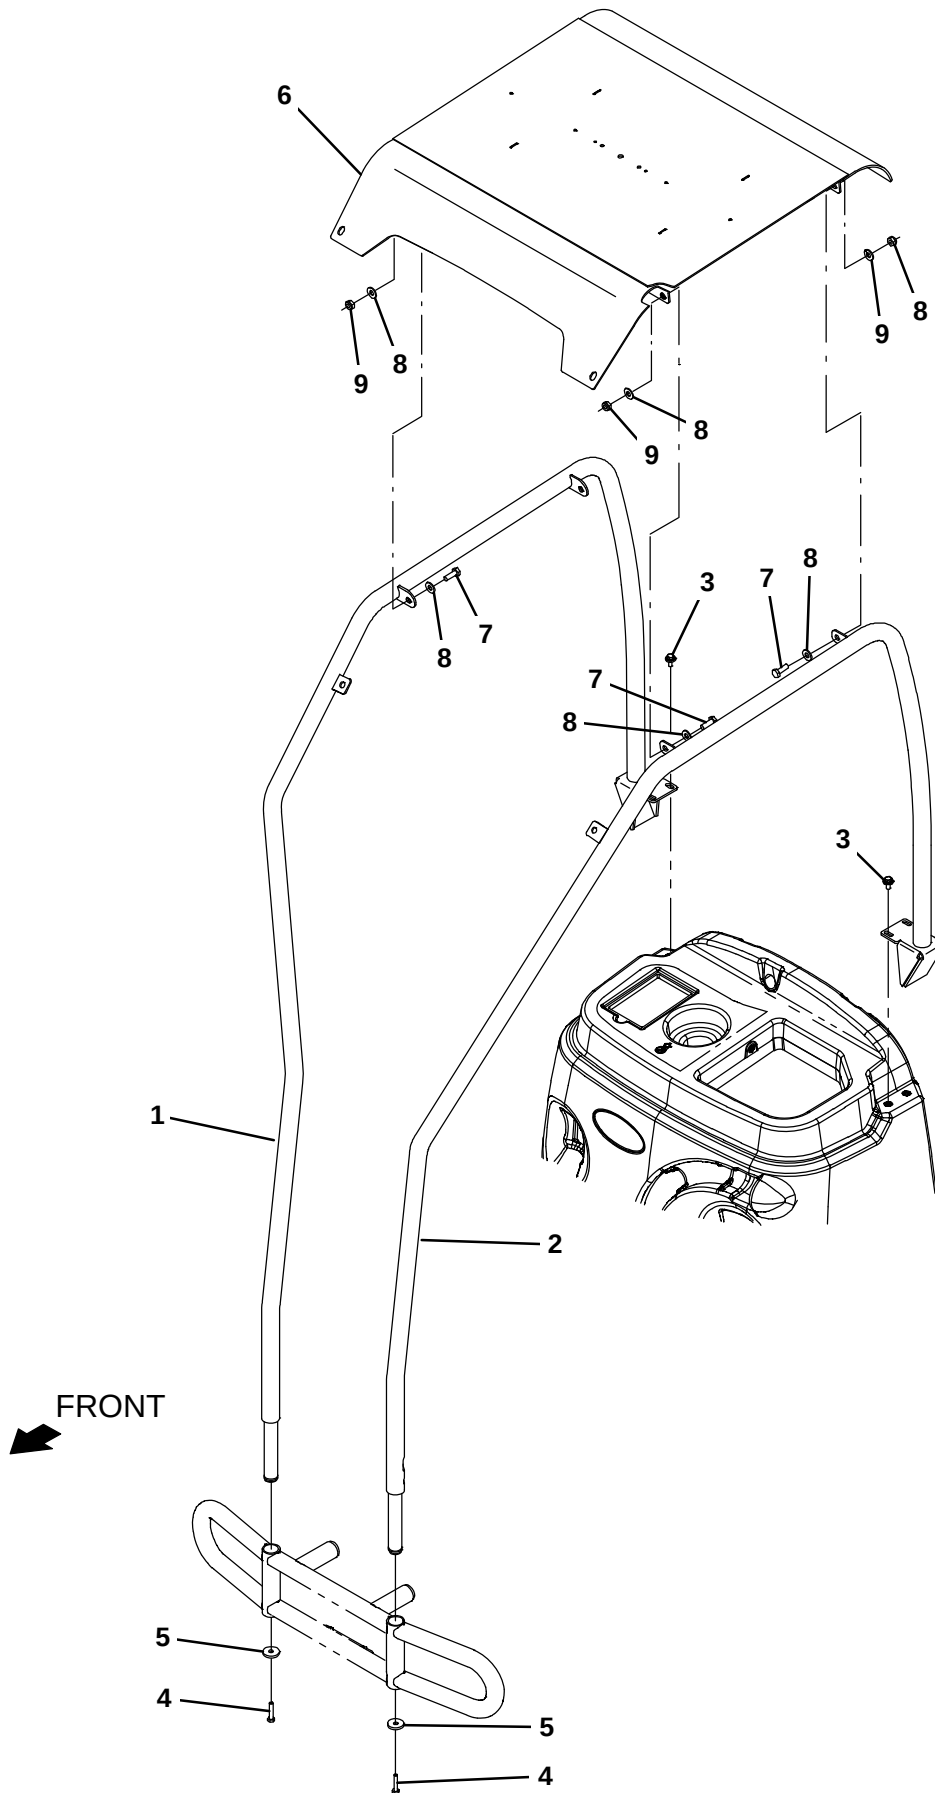


Fig. 7 – Overhead Guard Kit

NOTE: Overhead Guard Kit (including Heavy Duty Bumper), Tennant Part Number 9009861, includes; Fig. 6 and Fig. 7.

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009848	(10000000–19999999)	Ohg Kit W/O Bumper, Ci [T12]	1
▲	1	1201550	(10000000–19999999)	Tube Wldt, Guard, Rh	1
▲	2	1201357	(10000000–19999999)	Tube Wldt, Guard, Lh	1
▲	3	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	4
▲	4	09023	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 35, Fl, Ss	2
▲	5	46983	(10000000–19999999)	Washer, Flat, 0.39b 1.38d .19, Stl, Pl	2
▲	6	1201247	(10000000–19999999)	Guard Wldt, Top, Ohg	1
▲	7	03192	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 30, 8.8	4
▲	8	32492	(10000000–19999999)	Washer, Flat, 0.38, Std	8
▲	9	41430	(10000000–19999999)	Nut, Hex, Lock, M10 X 1.5, NI	4

Fig. 8 – ec-H2O Solution Pump Group

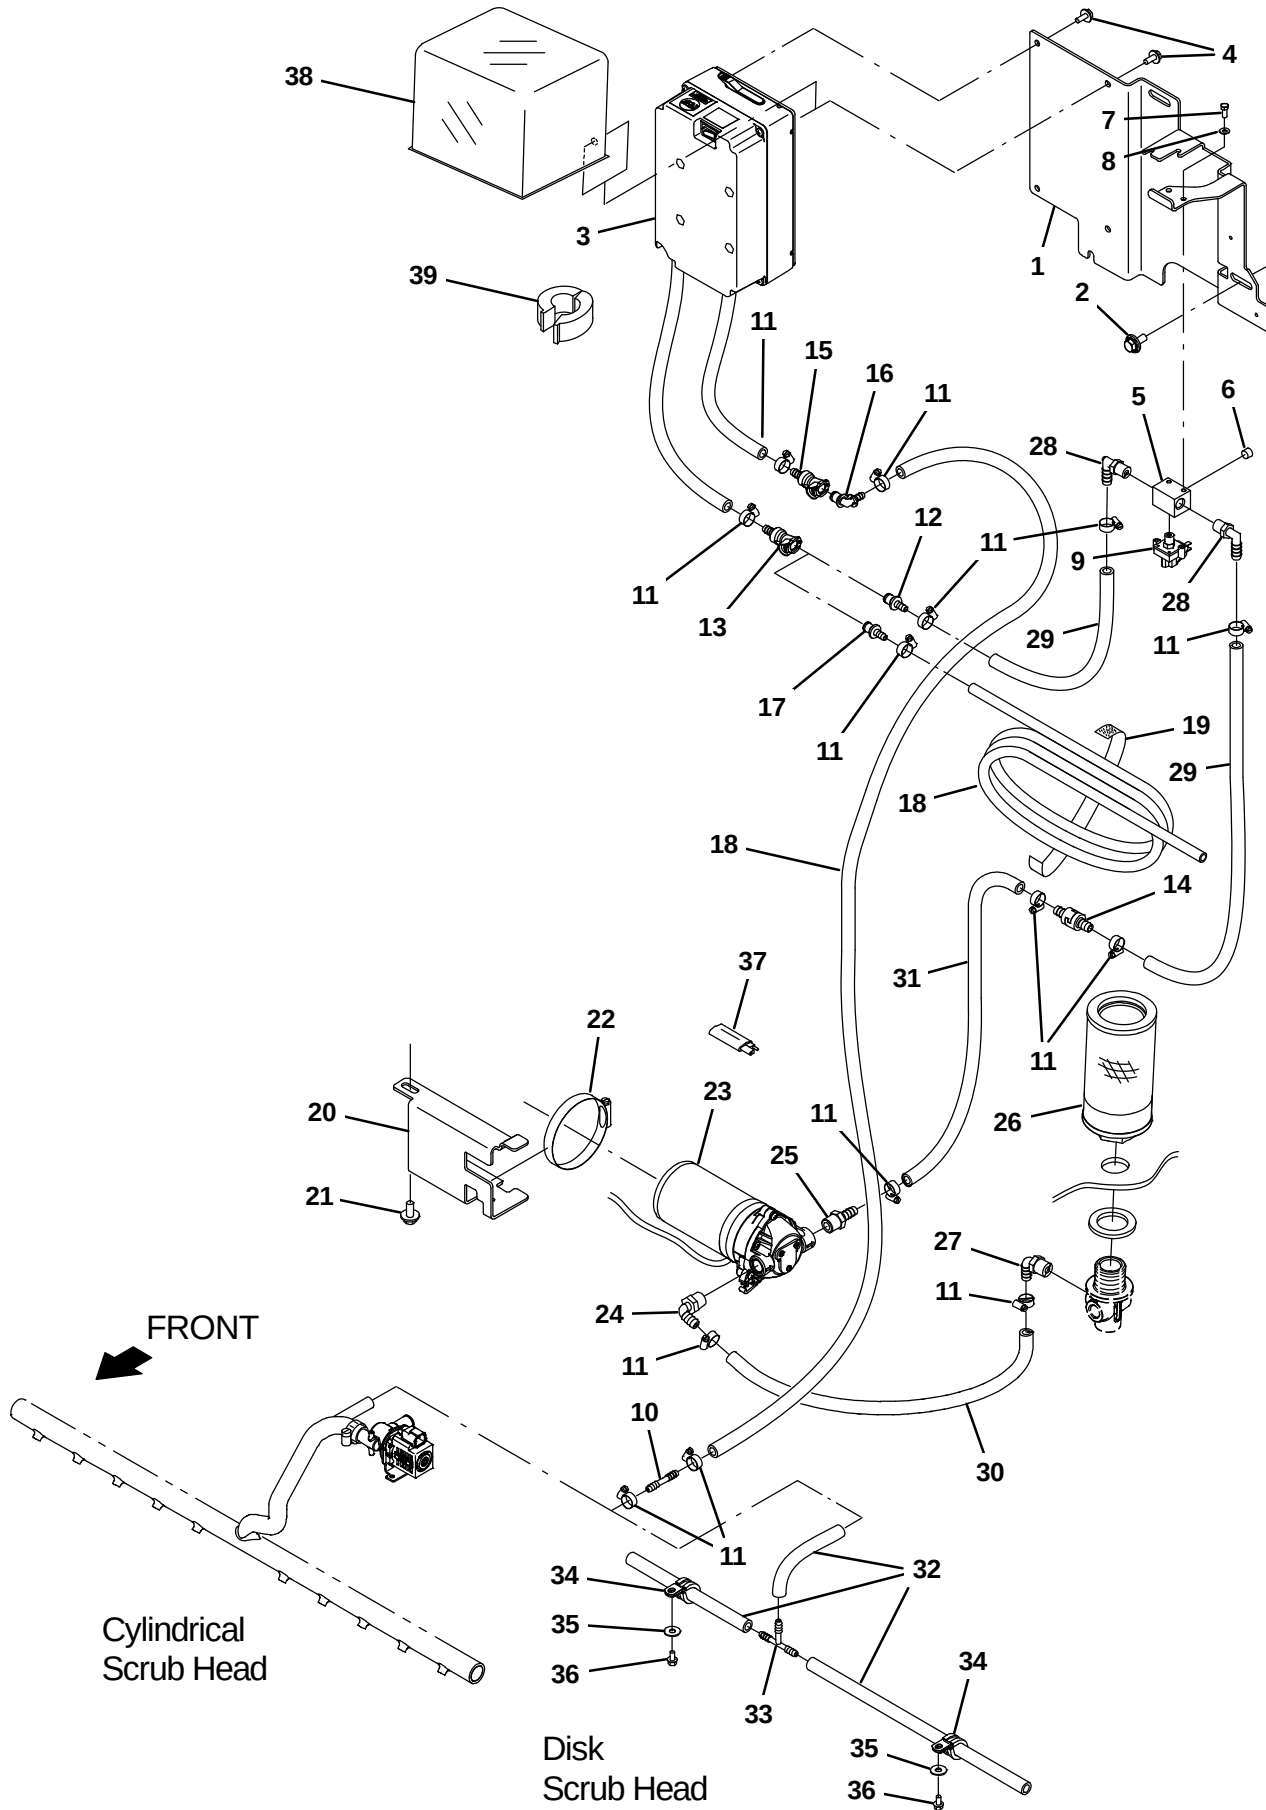


Fig. 8 – ec-H2O Solution Pump Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1247316	(10000000-19999999)	Bracket, Soltn [Ec-H2o]	1
2	1020341	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	3
3	9010933	(10000000-19999999)	Ech20 Module, Afmkt [T12] (See Breakdowns)	1
4	1034731	(10000000-19999999)	Screw, Hex, M6 X 1.00 X 16, Ss, Sems	4
5	1059231	(10000000-19999999)	Fitting, Stl, Pm04/Pm02/Pm04/Pm02, Spcl	1
6	150208	(10000000-19999999)	Fitting, Brs, Str, Pm02, Plug [Skhd]	1
7	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	2
8	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	2
9	1044415	(10000000-19999999)	Switch, Press, 20psi, Pm02	1
10	1052705	(10000000-19999999)	Fitting, Plstc, Str, Bm04/Bm04	2
11	43844	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.25-0.62d, .31w	14
12	1203814	(10000000-19999999)	Fitting, Plstc, Str, Bm06, Cplg, Male	1
13	1203454	(10000000-19999999)	Fitting, Plstc, Str, Bm06, Cplg, Fem	1
14	1015455	(10000000-19999999)	Valve, Check, 0005psi Bm06/Bm06	1
15	1203996	(10000000-19999999)	Fitting, Plstc, Str, Bm05, Cplg, Fem	1
16	1204024	(10000000-19999999)	Fitting, Plstc, E90, Bm04 Cplg Male	1
17	1204338	(10000000-19999999)	Fitting, Plstc, Str, Bm04, Cplg, Male	1
18	1206779	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.25Id, 08Ft	2
19	1059534	(10000000-19999999)	Fastener, 09.00l [Hook & Loop]	1
20	1201310	(10000000-19999999)	Bracket, Pump, Soltn	1
21	1020341	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	1
22	43555	(10000000-19999999)	Clamp, Hose, Wormdrive, 2.62-3.50d	1
23	1200328	(10000000-19999999)	Pump, Soltn, Ele, 36vdc, 60psi	1
24	1005630	(10000000-19999999)	Fitting, Plstc, E90, Bm06/Pm06, Nyl	1
25	150538	(10000000-19999999)	Fitting, Plstc, Str, Bm06/Pm06	1
26	1201379	(10000000-19999999)	Filter, Soltn, 080 Mesh, Pm12 3.2d 6.0l	1
27	1005630	(10000000-19999999)	Fitting, Plstc, E90, Bm06/Pm06, Nyl	1
28	57248	(10000000-19999999)	Fitting, Plstc, E90, Bm06/Pm04, Nyl	2
29	1014971	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.38id, 01ft, Clr	2
30	1006400	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.38id, 03ft, Clr	1
31	1014974	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.38id, 02ft, Clr	1
32	1206778	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.25Id, 03Ft	1
33	150713	(10000000-19999999)	Fitting, Plstc, Tee, Bm04/Bm04/Bm04	1
34	1016354	(10000000-19999999)	Clamp, Cable, Ss, 0.50D X 0.50W [Insul]	2
35	01684	(10000000-19999999)	Washer, Flat, 0.27B 0.69D .05, Ss	2
36	223198	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 10, Fmg	2
37	1040868	(10000000-19999999)	Capacitor, Plug [.01 Uf, 200V]	1
38	9011663	(10000000-19999999)	Silicone Cap, Afmkt [ec-H2O]	1
39	1249803	(10000000-19999999)	Ferrite Clam On Id=0.52	1

Fig. 9 – ec-H2O Solution Supply Group, Side Brush

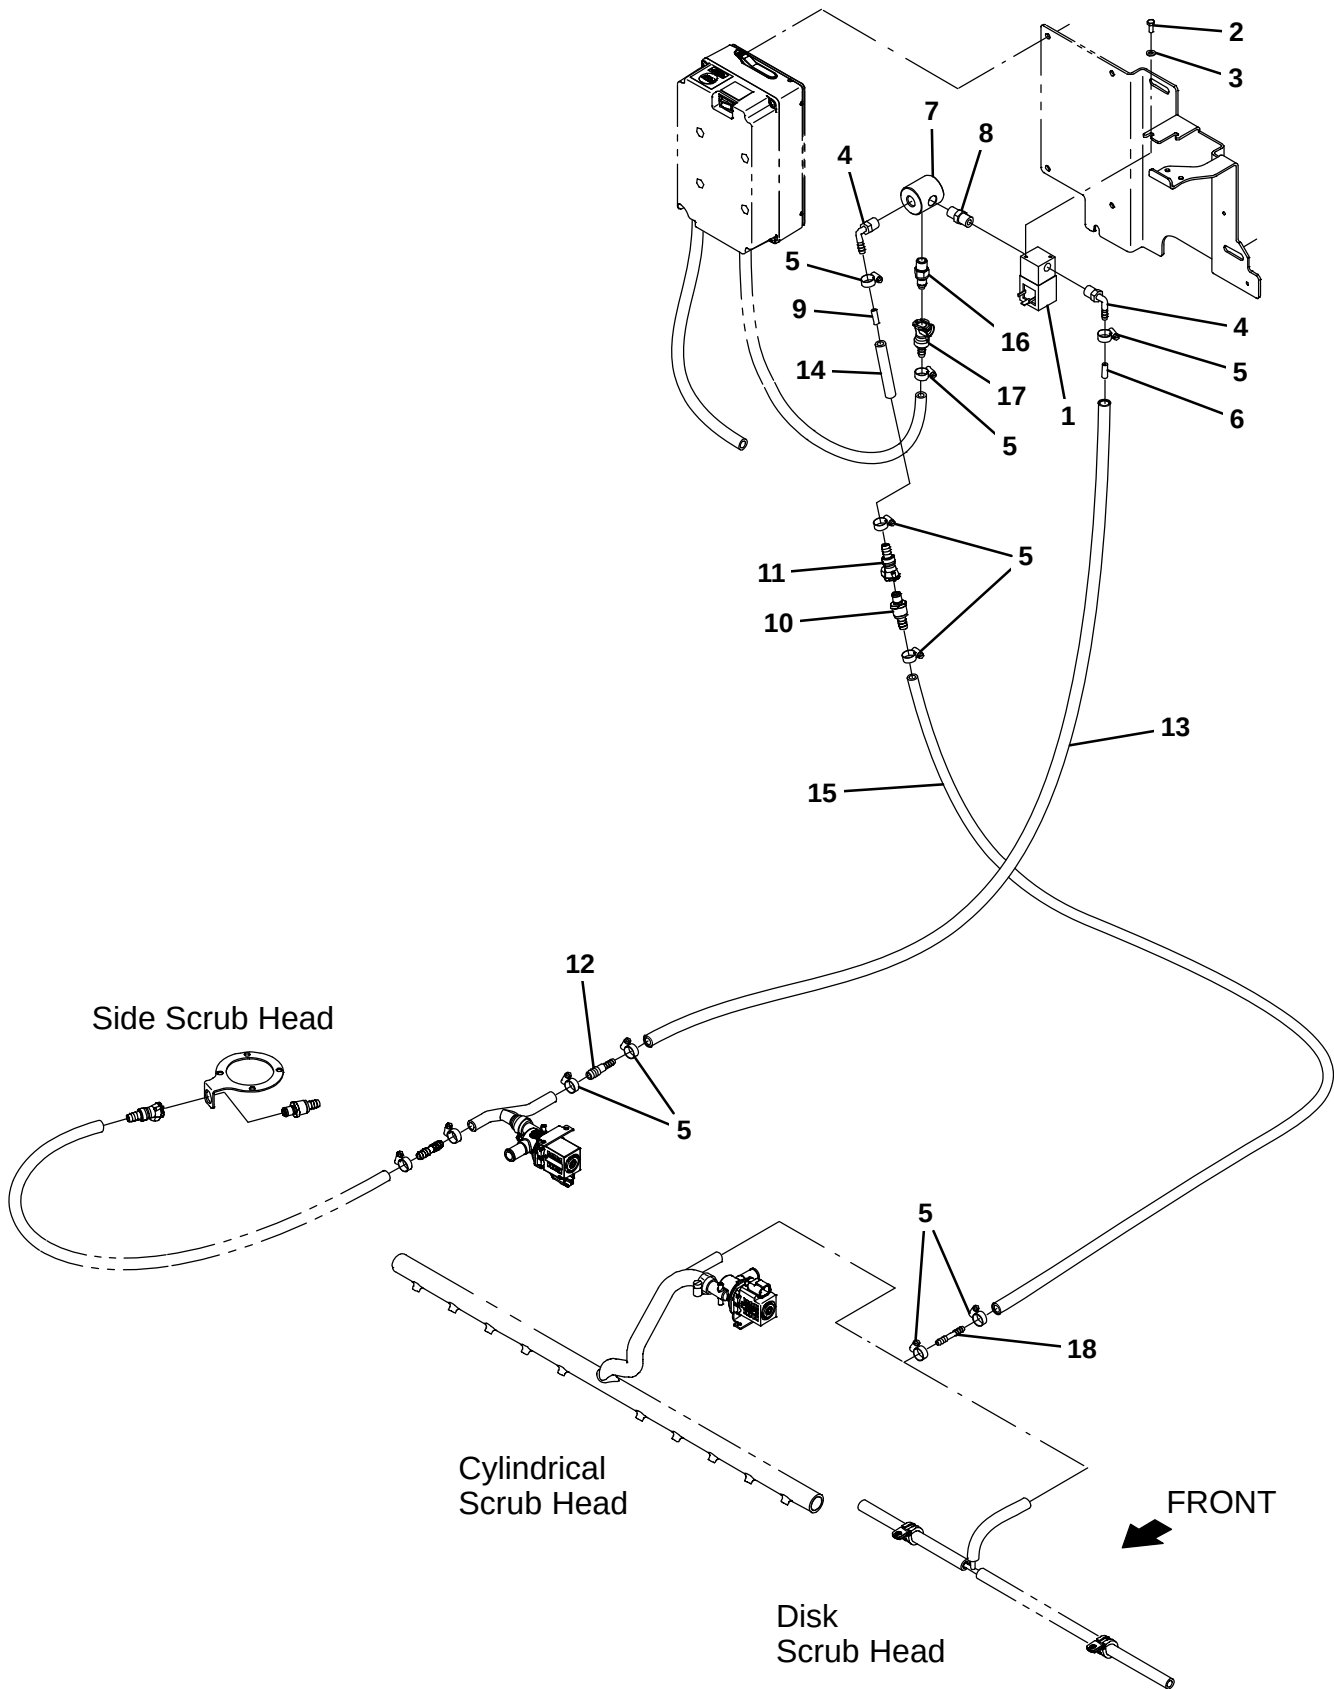


Fig. 9 – ec-H2O Solution Supply Group, Side Brush

Ref.	Part No.	Serial Number	Description	Qty.
1	1028581	(10000000-19999999)	Valve, Water, Solenoid, 36vdc 6.0mm Pf04	1
2	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	2
3	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	2
4	1011170	(10000000-19999999)	Fitting, Plstc, E90, Bm04/Pm04, Nyl	2
5	43844	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.25-0.62d, .31w	9
6	1200467	(10000000-19999999)	Fitting, Plstc, Rst	1
7	1200998	(10000000-19999999)	Fitting, Plstc, Pf04/Pf04/Pf04	1
8	1052010	(10000000-19999999)	Fitting, Plstc, Str, Pm04/Pm04	1
9	1201441	(10000000-19999999)	Fitting, Plstc, Rst, Main Head	1
10	1204338	(10000000-19999999)	Fitting, Plstc, Str, Bm04, Cplg, Male	1
11	1002898	(10000000-19999999)	Fitting, Plstc, Str, Bm04, Cplg,Fem[Tco]	1
12	1039557	(10000000-19999999)	Fitting, Plstc, Str, Bm04/Bm06	1
13	1014949	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.25Id, 08Ft	1
14	1206776	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.25Id, 01Ft	1
15	1206779	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.25Id, 08Ft	1
16	1002899	(10000000-19999999)	Fitting, Plstc, Str, Pm04, Cplg,Mal[Tco]	1
17	1203996	(10000000-19999999)	Fitting, Plstc, Str, Bm05, Cplg, Fem	1
18	1052705	(10000000-19999999)	Fitting, Plstc, Str, Bm04/Bm04	1

T12 9009916 (1-2013)

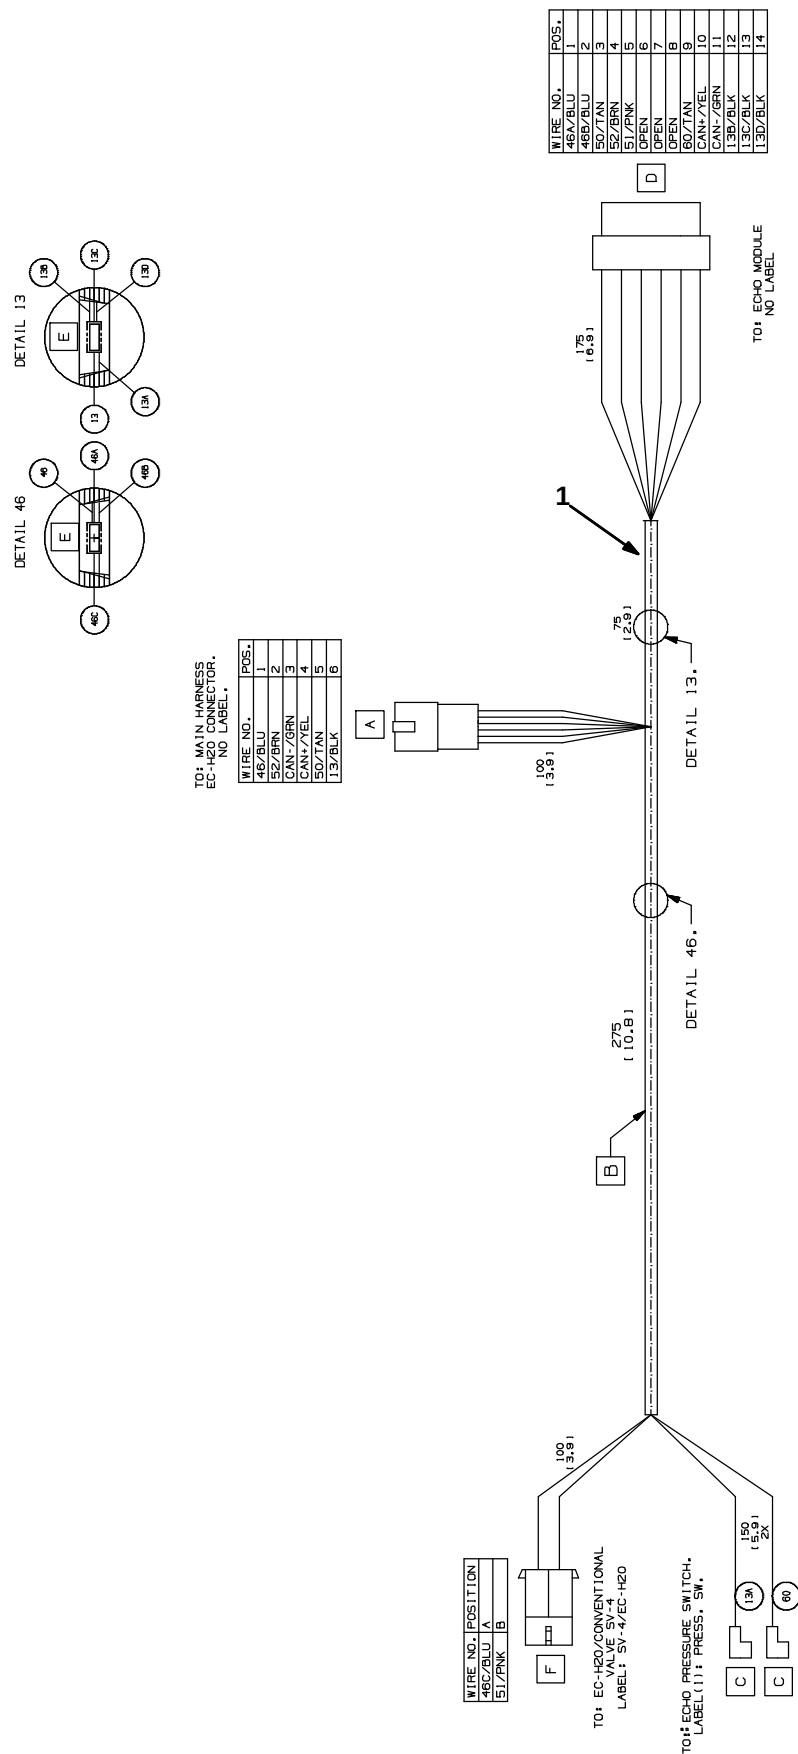


Fig. 10 – ec-H20 Wire Harness Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1069671	(10000000–19999999)	Harness, Ele [Ec-H20, T12]	1

Fig. 11 – Side Brush Motor and Squeegee Group

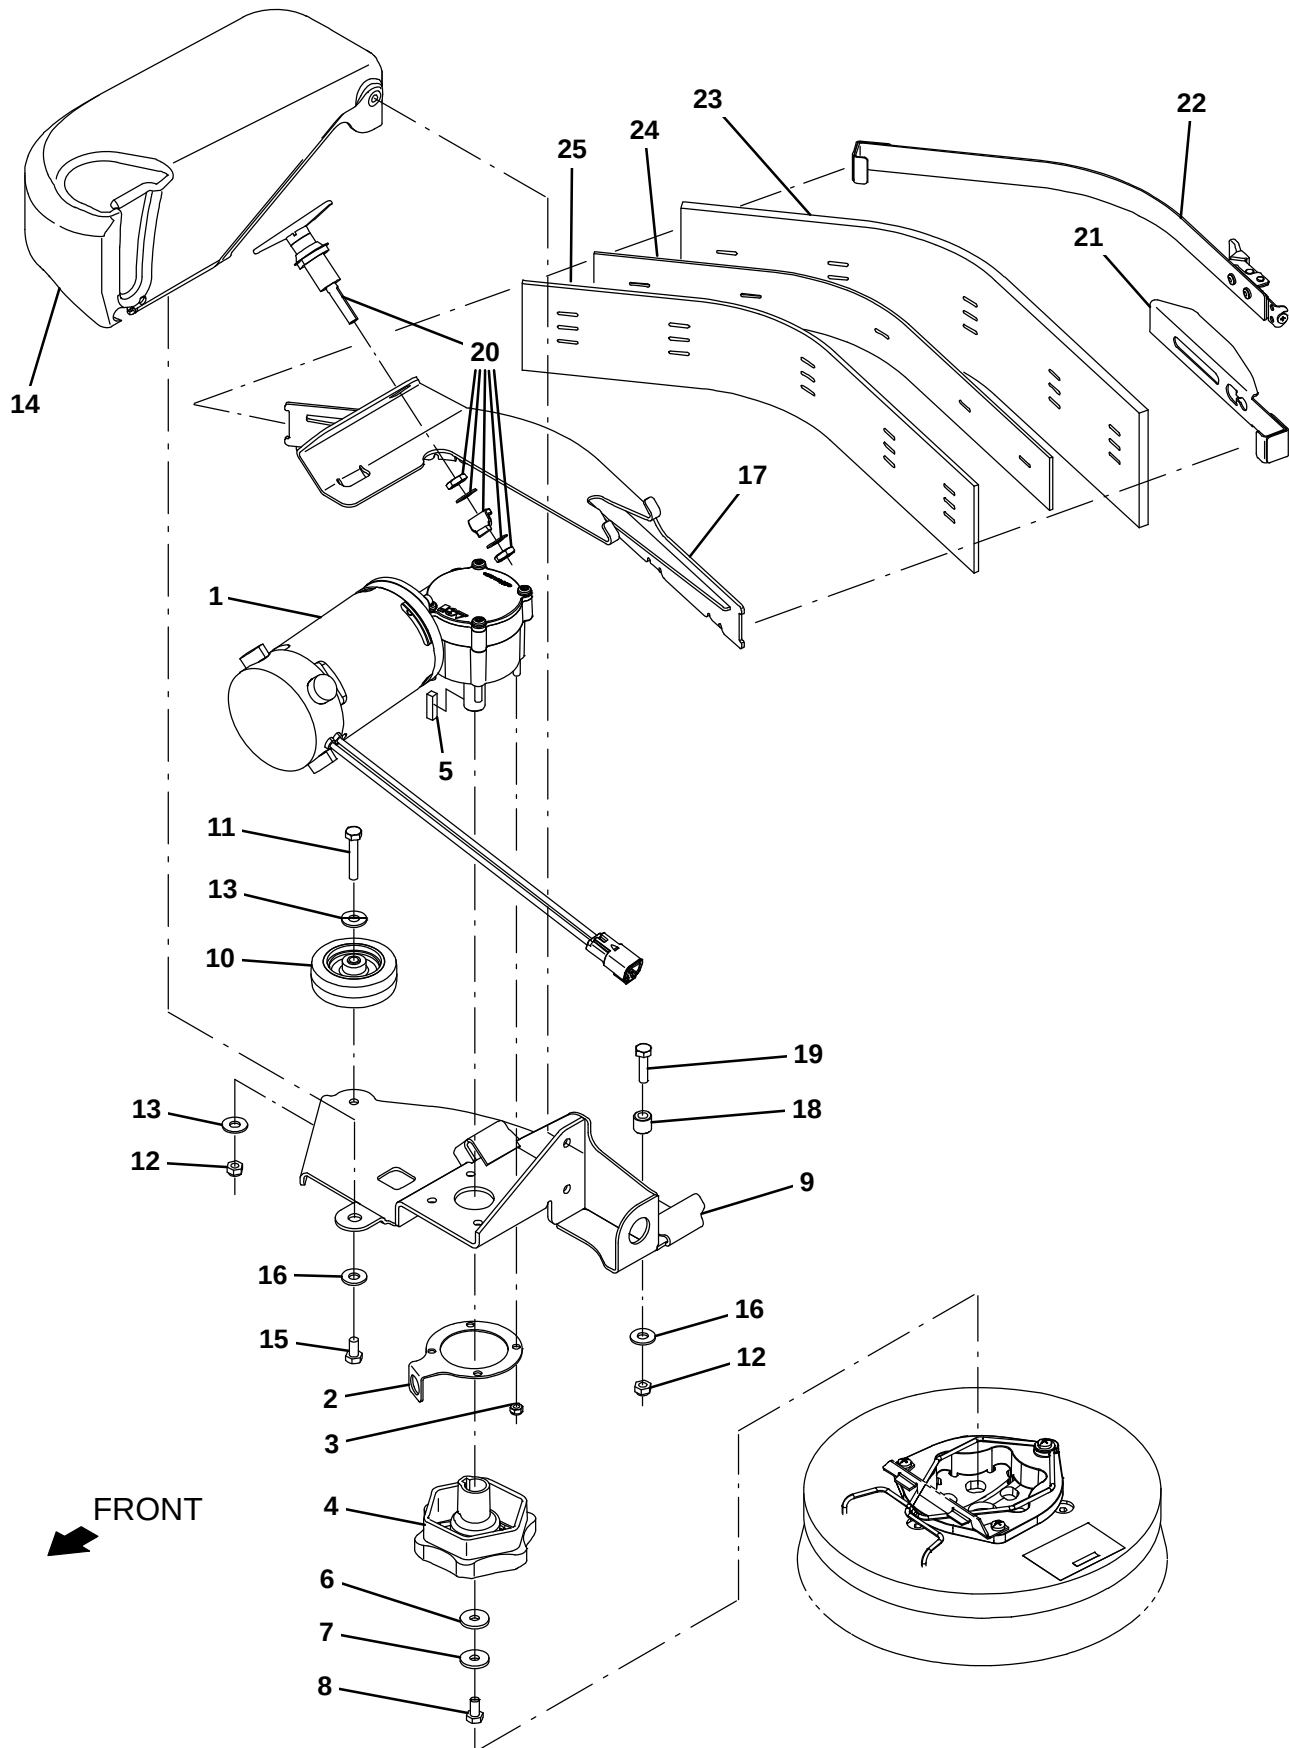


Fig. 11 – Side Brush Motor and Squeegee Group

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1245125	(10000000-19999999)	Motor, Ele, 36vdc 0320rpm 0.63hp Gear	1
▲		1242618	(10000000-19999999)	Brush, Motor, [1PC=1Kit]	1
	2	1203439	(10000000-19999999)	Plate, Sppt	1
	3	08712	(10000000-19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	4
	4	377364	(10000000-19999999)	Hub, Drive, Brush, Disk, 0.75b [6t]	1
	5	00928	(10000000-19999999)	Key, Sq, 0.25 X 0.25, 1.00l	1
	6	1017218	(10000000-19999999)	Washer, Flat, 0.32b 1.00d .12, Ss	1
	7	41186	(10000000-19999999)	Washer, Flat, Belleville, .31	1
	8	09740	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss	1
	9	1200417	(10000000-19999999)	Plate Wldt, Deck, Sba	1
	10	1014918	(10000000-19999999)	Wheel, 03.0d 0.88w 0.31b, W/ Bshg, Rbr	1
	11	222505	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 45, Ss	1
	12	08713	(10000000-19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
	13	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
	14	9010929	(10000000-19999999)	Cover, Motor, Sba, Afmkt [T12]	1
	15	15675	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 16, Ss	1
	16	01685	(10000000-19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
	17	1201327	(10000000-19999999)	Squeegee Wldt, Holder, Sba	1
	18	80409	(10000000-19999999)	Sleeve, P/M, 0.34b 0.63d 0.6l, Bnz	1
	19	09011	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	1
	20	1201149	(10000000-19999999)	Latch, Compression, Sqge, Sba	1
	21	1201609	(10000000-19999999)	Retainer Wldt, Sqge, Sba	1
	22	1201610	(10000000-19999999)	Retainer Wldt, Sqge, Sba, With Latch	1
	23	1201345	(10000000-19999999)	Blade, Sqge, Sba, Linatex	1
	23	1204541	(10000000-19999999)	Blade, Sqge, Sba, Urethane (Option)	1
	23	1204543	(10000000-19999999)	Blade, Sqge, Sba, Gum (Option)	1
	24	1201344	(10000000-19999999)	Spacer, Blade	1
	25	1201343	(10000000-19999999)	Blade, Sqge, Sba, Inner, Linard	1
	25	1204540	(10000000-19999999)	Blade, Sqge, Sba, Inner, Urethane (Option)	1
	25	1204542	(10000000-19999999)	Blade, Sqge, Sba, Inner, Gum (Option)	1

Fig. 12 – Side Brush Pivot Group

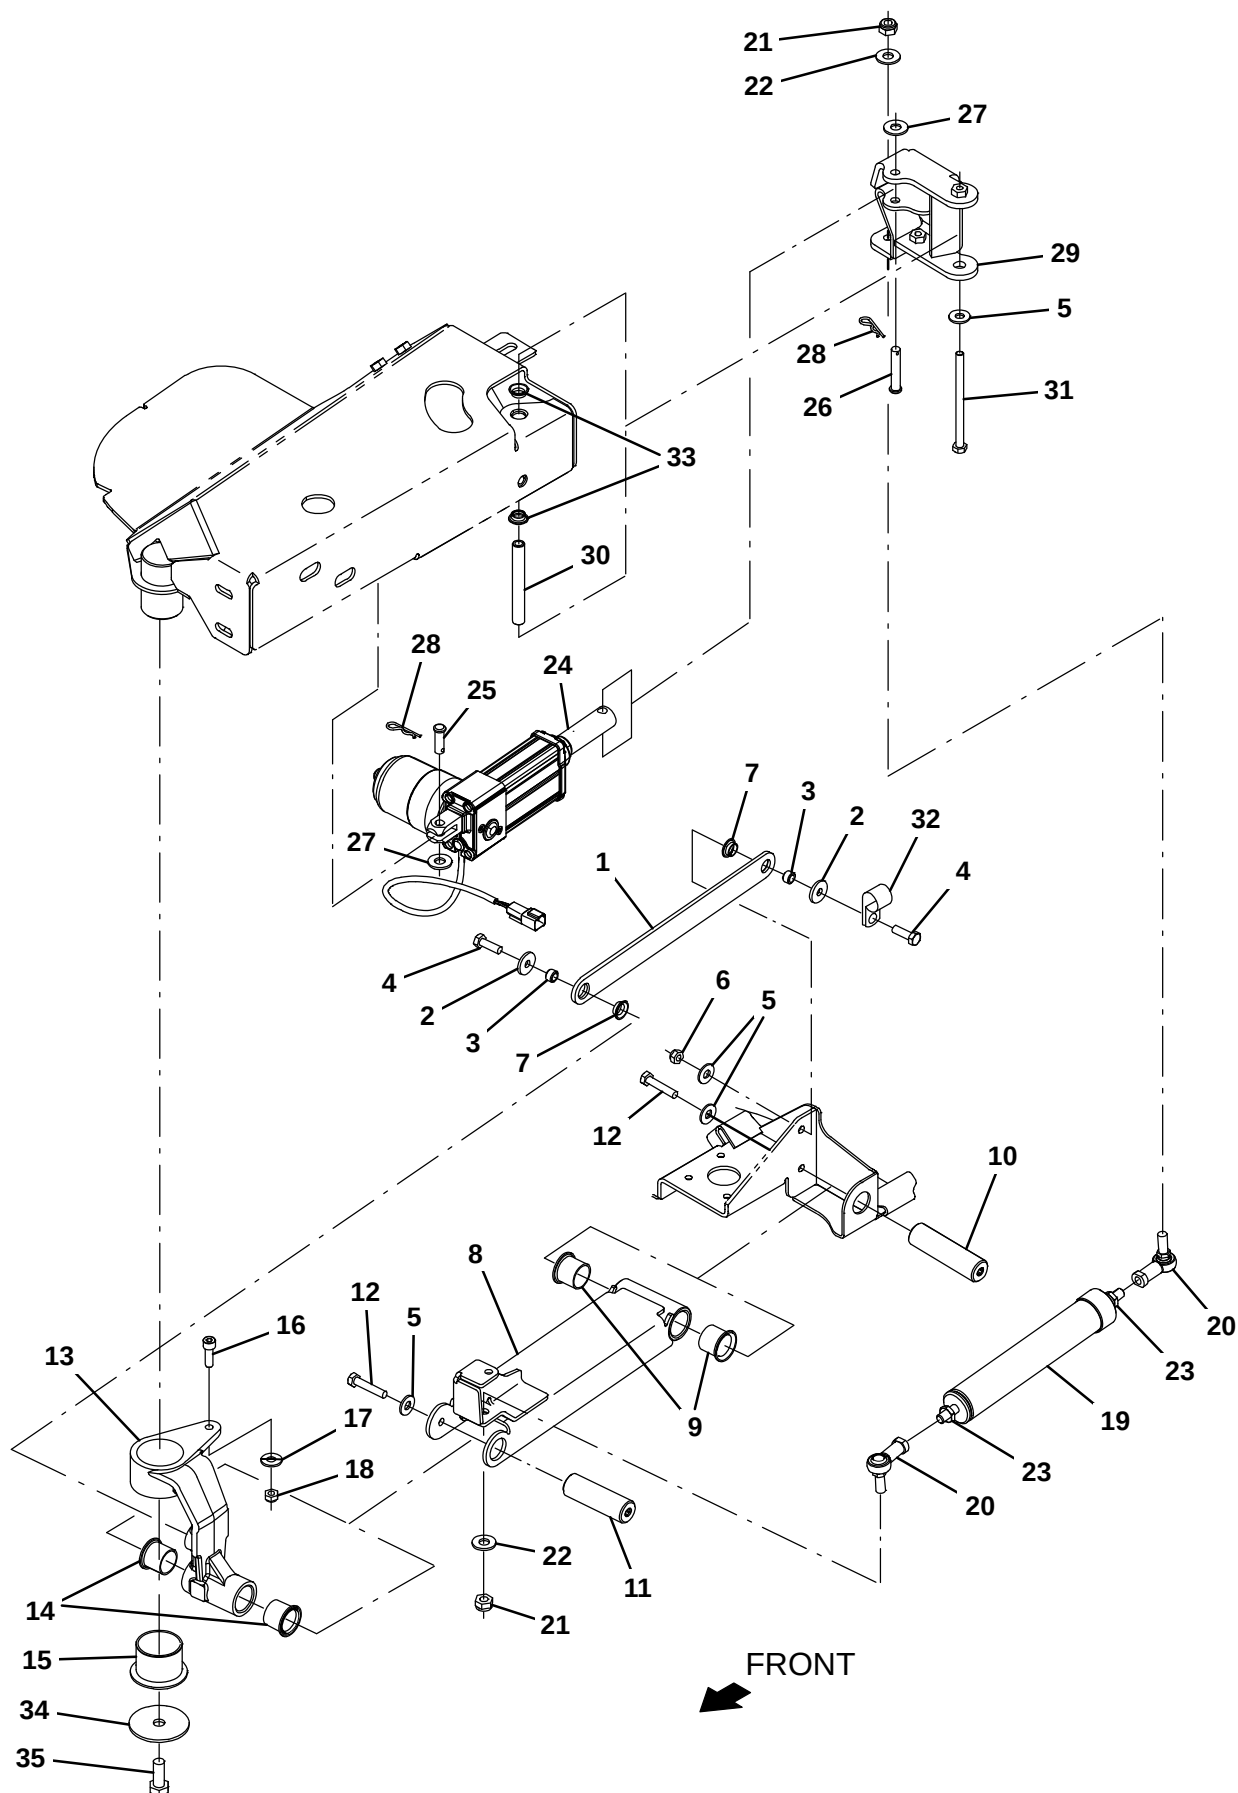


Fig. 12 – Side Brush Pivot Group

Ref.	Part No.	Serial Number	Description	Qty.	
1	1200939	(10000000–19999999)	Link, Upper	1	
2	1017218	(10000000–19999999)	Washer, Flat, 0.32b 1.00d .12, Ss	2	
3	222516	(10000000–19999999)	Sleeve, P/M, 0.32b 0.50d 0.3l [430ss]	2	
4	09010	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, Ss	2	
5	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	5	
6	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	1	
7	1054662	(10000000–19999999)	Bushing, Flng, 0.50b 0.59d 0.25l	2	
▽	8	9011055	(10000000–19999999)	Lift channel Kit, Sba, Afmkt [T12]	1
▲	9	54618	(10000000–19999999)	Bushing, Flng, 1.00b 1.13d 1.00l	2
10	1201137	(10000000–19999999)	Pin, Pivot, Sba	1	
11	1201575	(10000000–19999999)	Pin, Pivot, Sba	1	
12	09026	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 40, Ss	2	
▽	13	9011054	(10000000–19999999)	Pivot Arm Kit, Sba, Afmkt [T12]	1
▲	14	54618	(10000000–19999999)	Bushing, Flng, 1.00b 1.13d 1.00l	2
▲	15	1201101	(10000000–19999999)	Bushing, Flng, 1.75b 1.94d 1.50l	1
▲	16	39308	(10000000–19999999)	Screw, Soc, M8 X 1.25 X 25, 12.9	1
▲	17	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	1
▲	18	08713	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	1
▽	19	9010938	(10000000–19999999)	Spring Assy, Replmt, Afmkt [T12]	1
▲	20	05686	(10000000–19999999)	Rod–End, M10 X 1.5rh Fem M10 X 1.5stud	2
▲	21	08714	(10000000–19999999)	Nut, Hex, Lock, M10 X 1.5, NI, Ss	2
▲	22	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	2
▲	23	763064	(10000000–19999999)	Nut, Hex, Jam, M10 X 1.5, [Din439]	2
▽	24	9010941	(10000000–19999999)	Actuator Kit, Sba, Afmkt [T12]	1
▲	25	86240	(10000000–19999999)	Pin, Clevis, 0.38d X 1.13l	1
▲	26	29584	(10000000–19999999)	Pin, Clevis, 0.37d X 2.00l	1
▲	27	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	2
▲	28	44906	(10000000–19999999)	Pin, Cotter, Hair, 0.38d .093 Wir	2
29	1201094	(10000000–19999999)	Arm Assy, Lift, Actuator	1	
30	1202694	(10000000–19999999)	Sleeve, 0.334b 0.494d 4.00l Stl Pl	1	
31	49883	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 120, 8.8, FI	1	
32	140314	(10000000–19999999)	Clamp, Cable, Stl, 0.75D X 0.75W, 1Hole	1	
33	1054662	(10000000–19999999)	Bushing, Flng, 0.50b 0.59d 0.25l	2	
34	1200634	(10000000–19999999)	Washer, Flat, 0.48b 2.50d .12, Ss	1	
35	12309	(10000000–19999999)	Screw, Hex, M12 X 1.75 X 30, Ss	1	

Fig. 13 – Side Brush Bumper and Mount Group

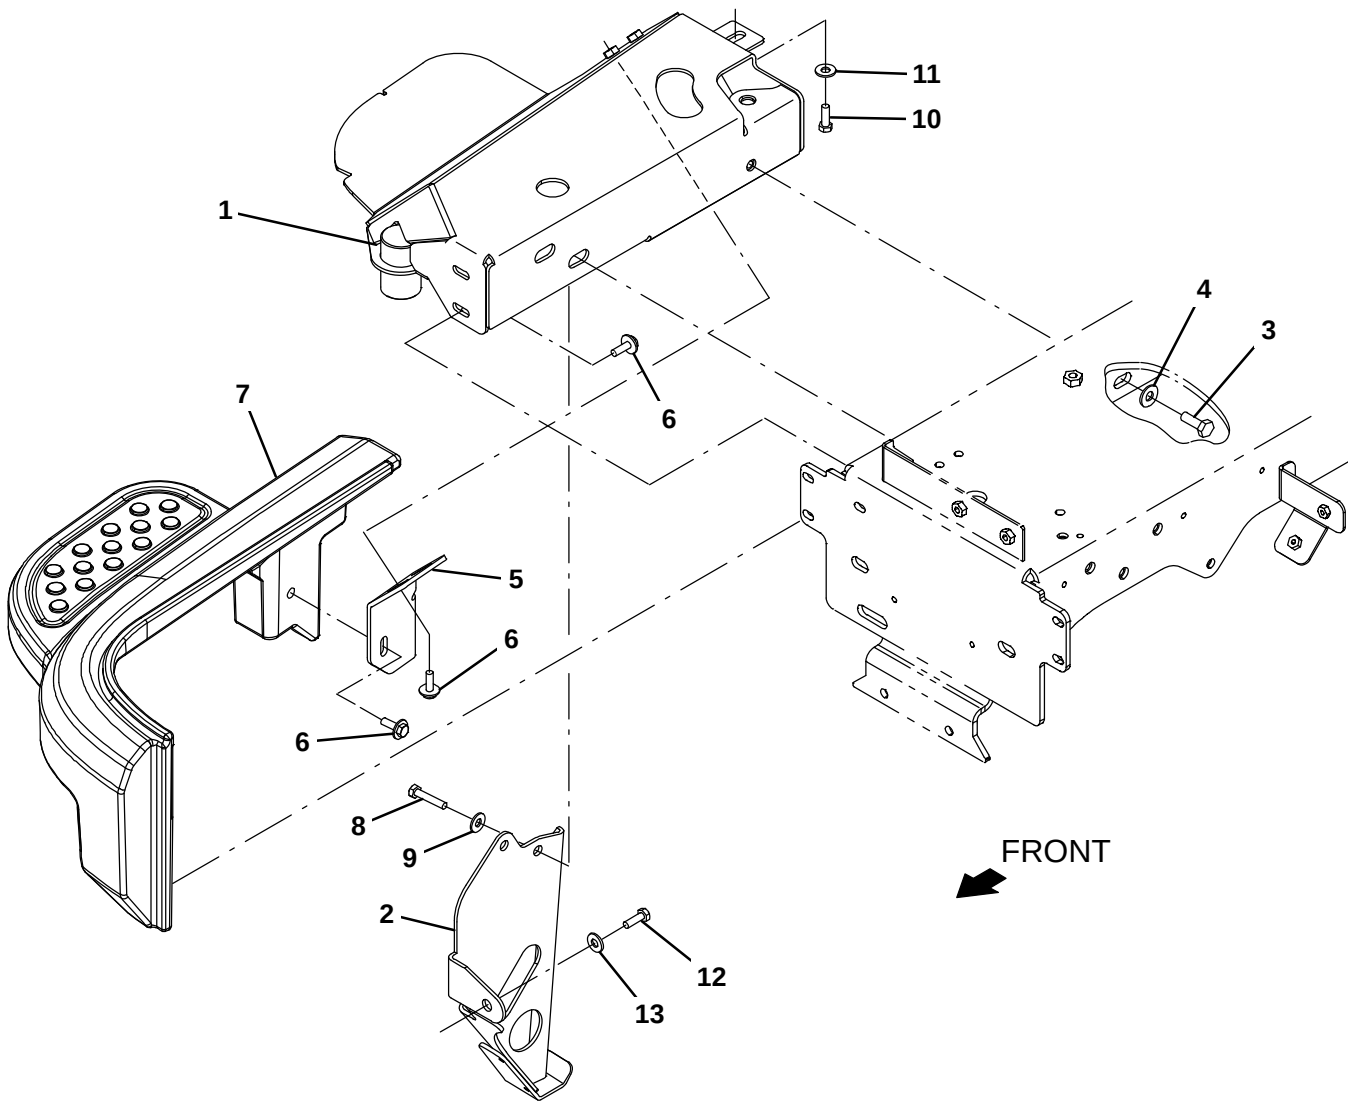


Fig. 13 – Side Brush Bumper and Mount Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200370	(10000000–19999999)	Bracket Wldt, Mount, Sba	1
2	1202914	(10000000–19999999)	Bracket Wldt, Skid, Anti-Roll	1
3	12317	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 30, Ss	1
4	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	1
5	1202521	(10000000–19999999)	Bracket, Sppt, Door	1
6	1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	3
7	9010926	(10000000–19999999)	Bumper, Sba, Afmkt [T12]	1
8	09028	(10000000–19999999)	Screw, Hex, M10 X 1.50 X 25, Ss	2
9	01686	(10000000–19999999)	Washer, Flat, 0.44b 1.00d .08, Ss	2
10	09010	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 25, Ss	1
11	01685	(10000000–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	1
12	12309	(10000000–19999999)	Screw, Hex, M12 X 1.75 X 30, Ss	1
13	140045	(10000000–19999999)	Washer, Flat, 0.51b 1.25d .06, Ss	1

Fig. 14 – Side Brush Solution Supply Group

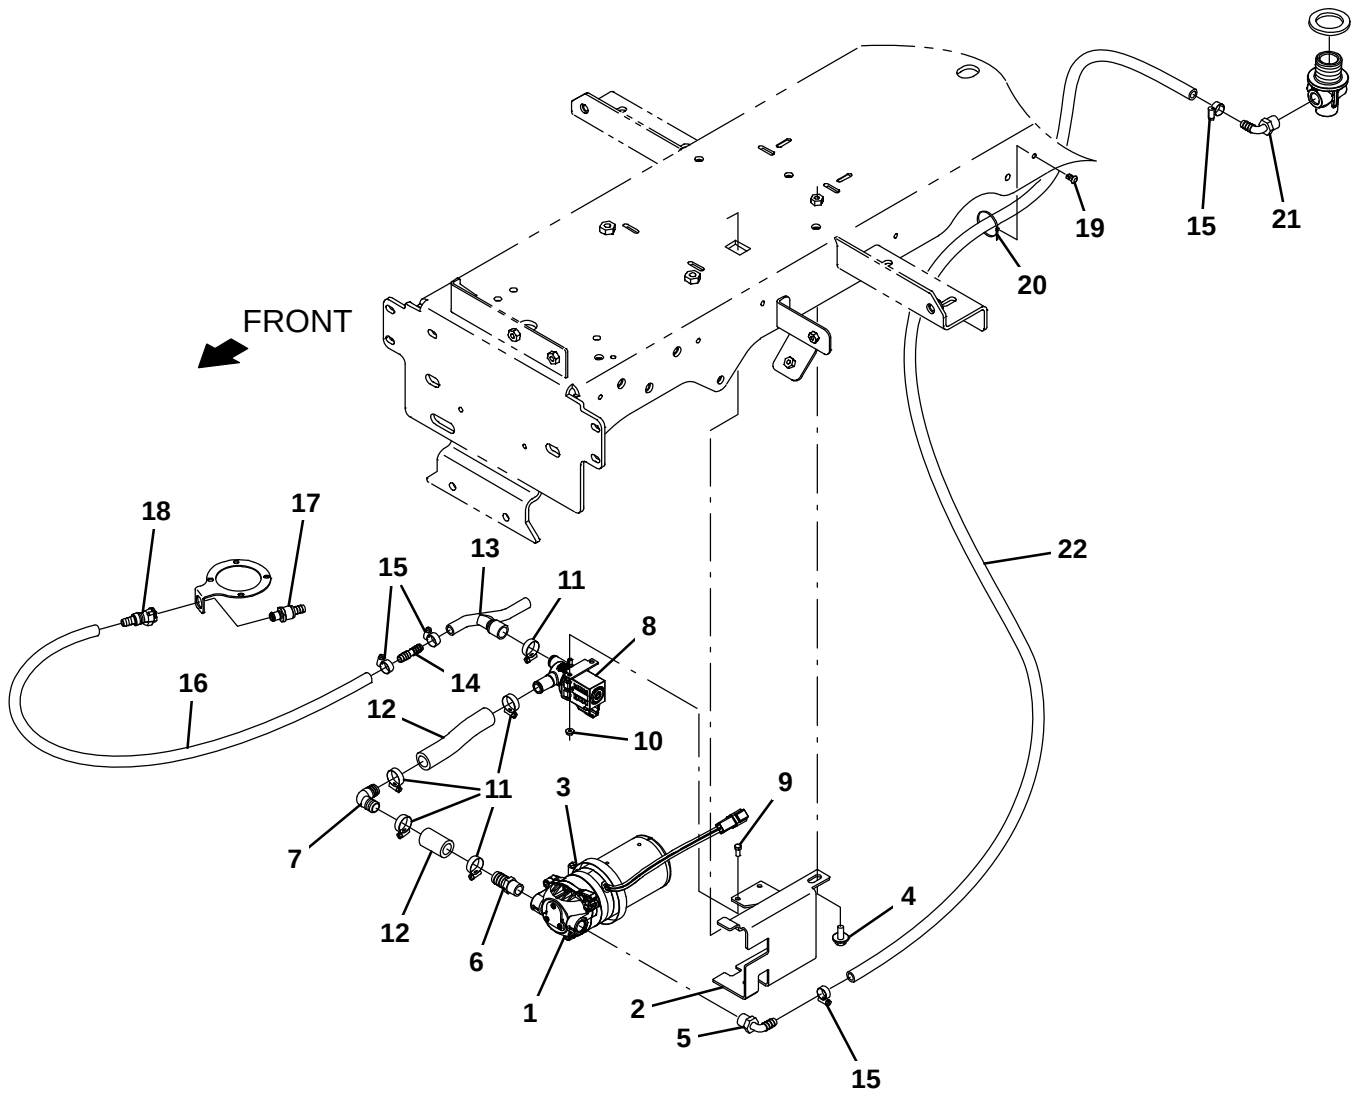


Fig. 14 – Side Brush Solution Supply Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1200713	(10000000-19999999)	Pump, Soltn, 36vdc	1
2	1201313	(10000000-19999999)	Bracket, Pump	1
3	43555	(10000000-19999999)	Clamp, Hose, Wormdrive, 2.62-3.50d	1
4	1020341	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	1
5	1005630	(10000000-19999999)	Fitting, Plstc, E90, Bm06/Pm06, Nyl	1
6	1013900	(10000000-19999999)	Fitting, Plstc, Str, Bm10/Pm06, Nyl	1
7	391365	(10000000-19999999)	Fitting, Plstc, E90, Bm10/Bm10	1
8	1054795	(10000000-19999999)	Valve, Water, Solenoid, 36vdc Bm12/Bm12	1
9	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	2
10	07789	(10000000-19999999)	Nut, Hex, Flng, M5 X 0.80	2
11	54333	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.31-0.88d, .31w	5
12	1015033	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.62id, 01ft, Clr	1
13	1201336	(10000000-19999999)	Manifold, Soltn, Sba	1
14	20950	(10000000-19999999)	Fitting, Plstc, Str, Bm06/Bm06	1
15	43844	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.25-0.62d, .31w	4
16	1006400	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.38id, 03ft, Clr	2
17	1203438	(10000000-19999999)	Fitting, Plstc, Str, Bm06, Mplg, Male	1
18	1203454	(10000000-19999999)	Fitting, Plstc, Str, Bm06, Cplg, Fem	1
19	1071085	(10000000-19999999)	Clip, Tie, 0.25d, Plstc	2
20	130773	(10000000-19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	2
21	1005630	(10000000-19999999)	Fitting, Plstc, E90, Bm06/Pm06, Nyl	1
22	1014976	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 0.38id, 08ft, Clr	1

Fig. 15 – Side Brush Electrical Group

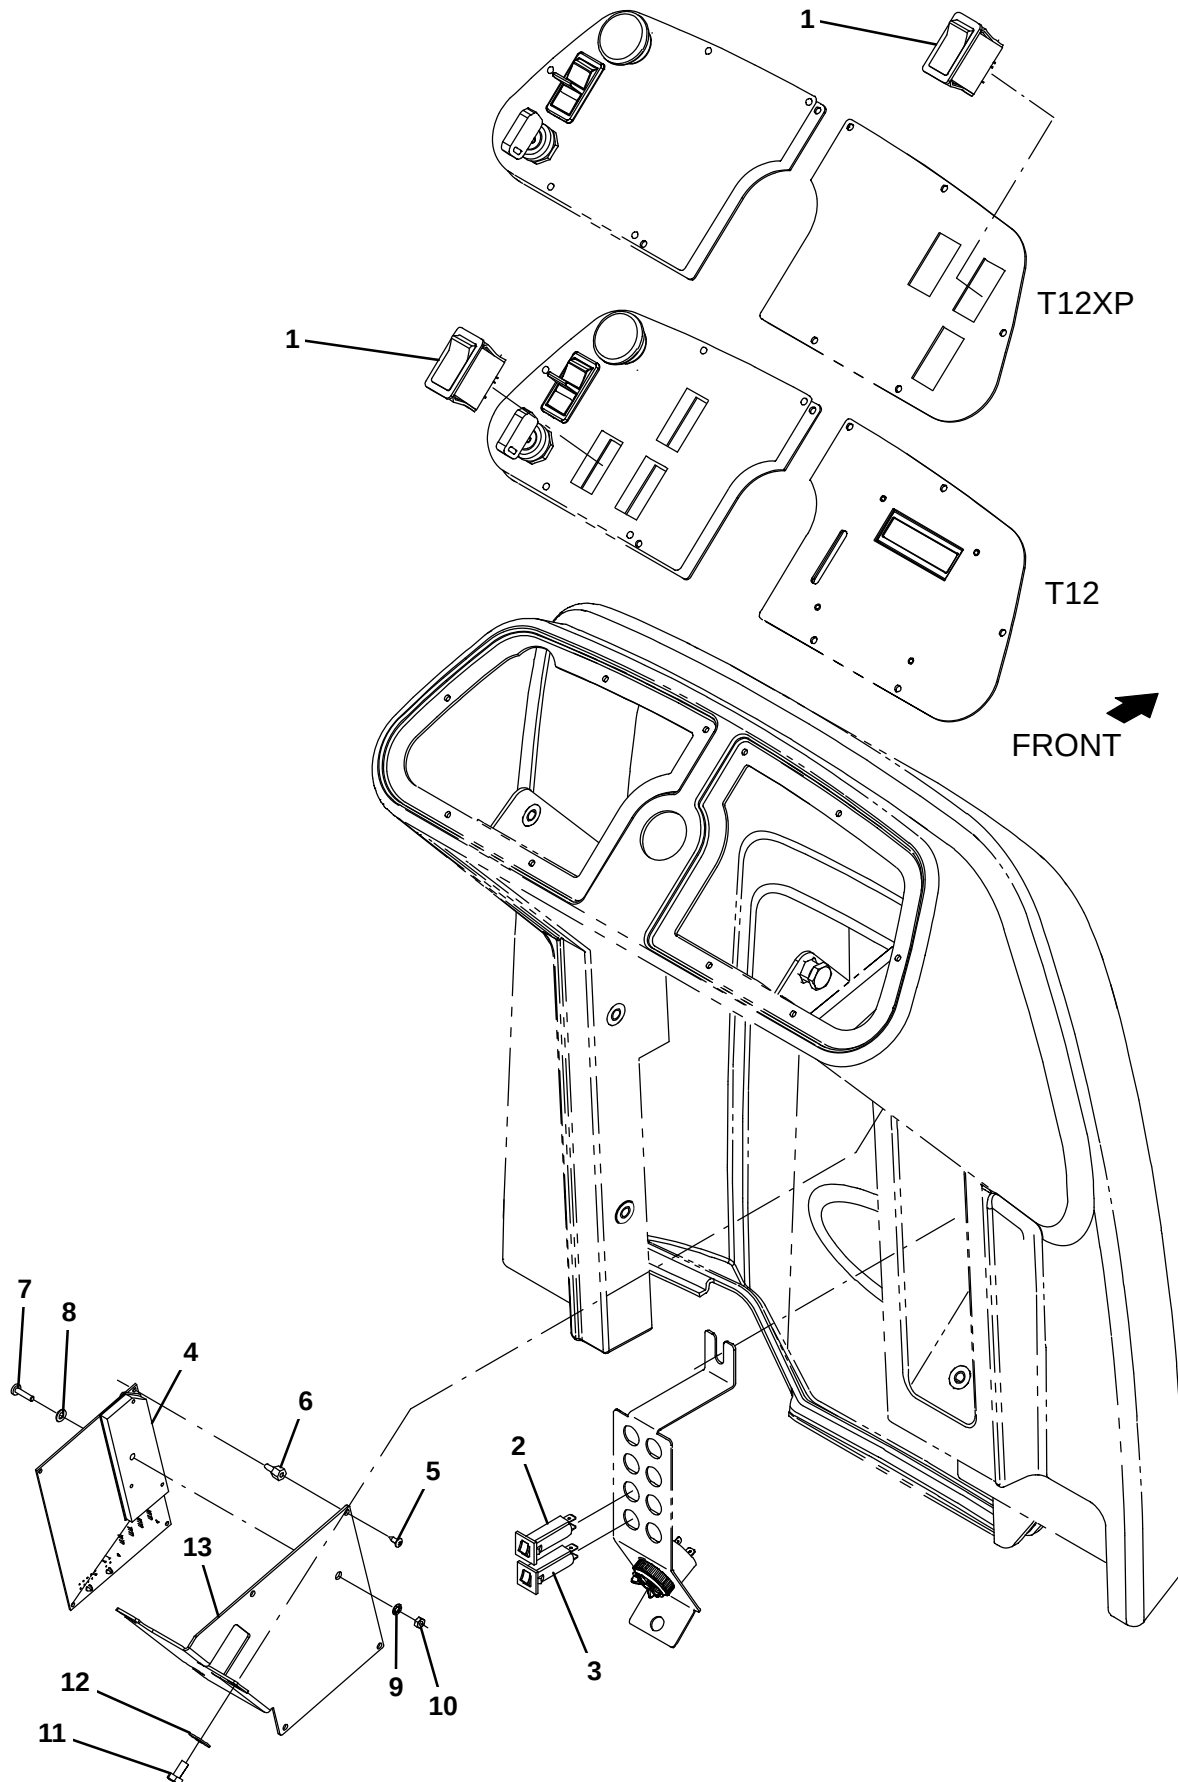


Fig. 15 – Side Brush Electrical Group

Ref.	Part No.	Serial Number	Description	Qty.
1	397889	(10000000–19999999)	Switch, Rocker, Dpst, On / None / On	1
2	1064184	(10000000–19999999)	Circuitbreaker, 02.5a, Resetable	1
3	1064189	(10000000–19999999)	Circuitbreaker, 20.0a, Resetable	1
4	9010932	(10000000–19999999)	Circuit Board Kit, H2o_Sba, Afmkt [T12]	1
5	3701.6	(10000000–19999999)	Screw, Pan, Phl, 06–32 X 0.38, Shtmtl, Ss	4
6	1016825	(10000000–19999999)	Support, Circuitboard	4
7	24265	(10000000–19999999)	Screw, Pan, Phl, M4 X 0.70 X 16, Ss	1
8	70246	(10000000–19999999)	Washer, Flat, 0.19b 0.38d .03, Nyl	1
9	32978	(10000000–19999999)	Washer, Lock, Int, 08	1
10	1049573	(10000000–19999999)	Nut, Hex, Jam, M4 X 0.70, Ss	1
11	09744	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 12, Ss	3
12	01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	3
13	1201164	(10000000–19999999)	Bracket, Circuit Board, Sba	1

Fig. 16 – Side Brush Wire Harness Group

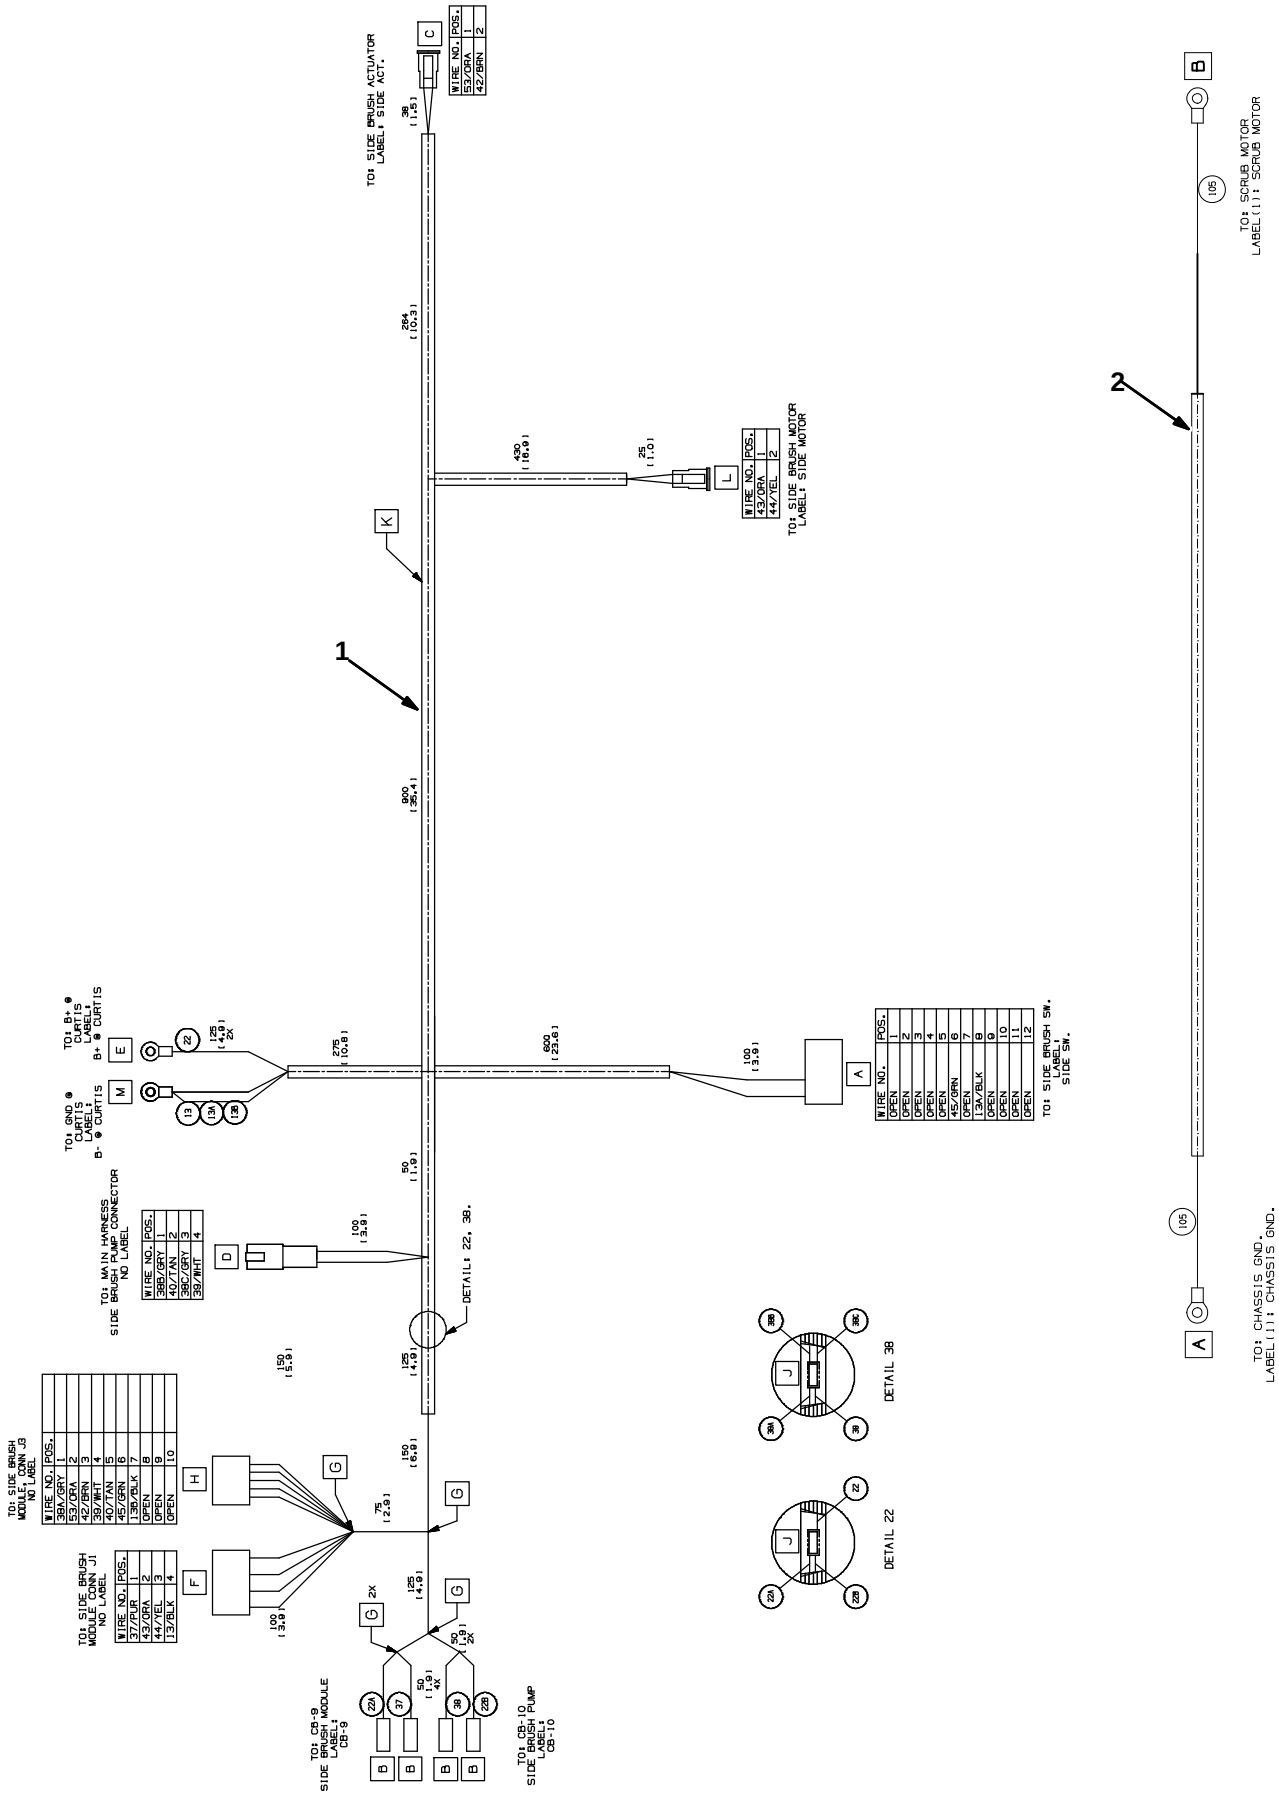


Fig. 16 – Side Brush Wire Harness Group

Ref.	Part No.	Serial Number	Description	Qty.
1	1069639	(10000000–19999999)	Harness, Side Brush, Ele [T12]	1
2	1076673	(10000000–19999999)	Harness, Ele [Gnd., T12]	1

Fig. 17 – Spray Hose Kit

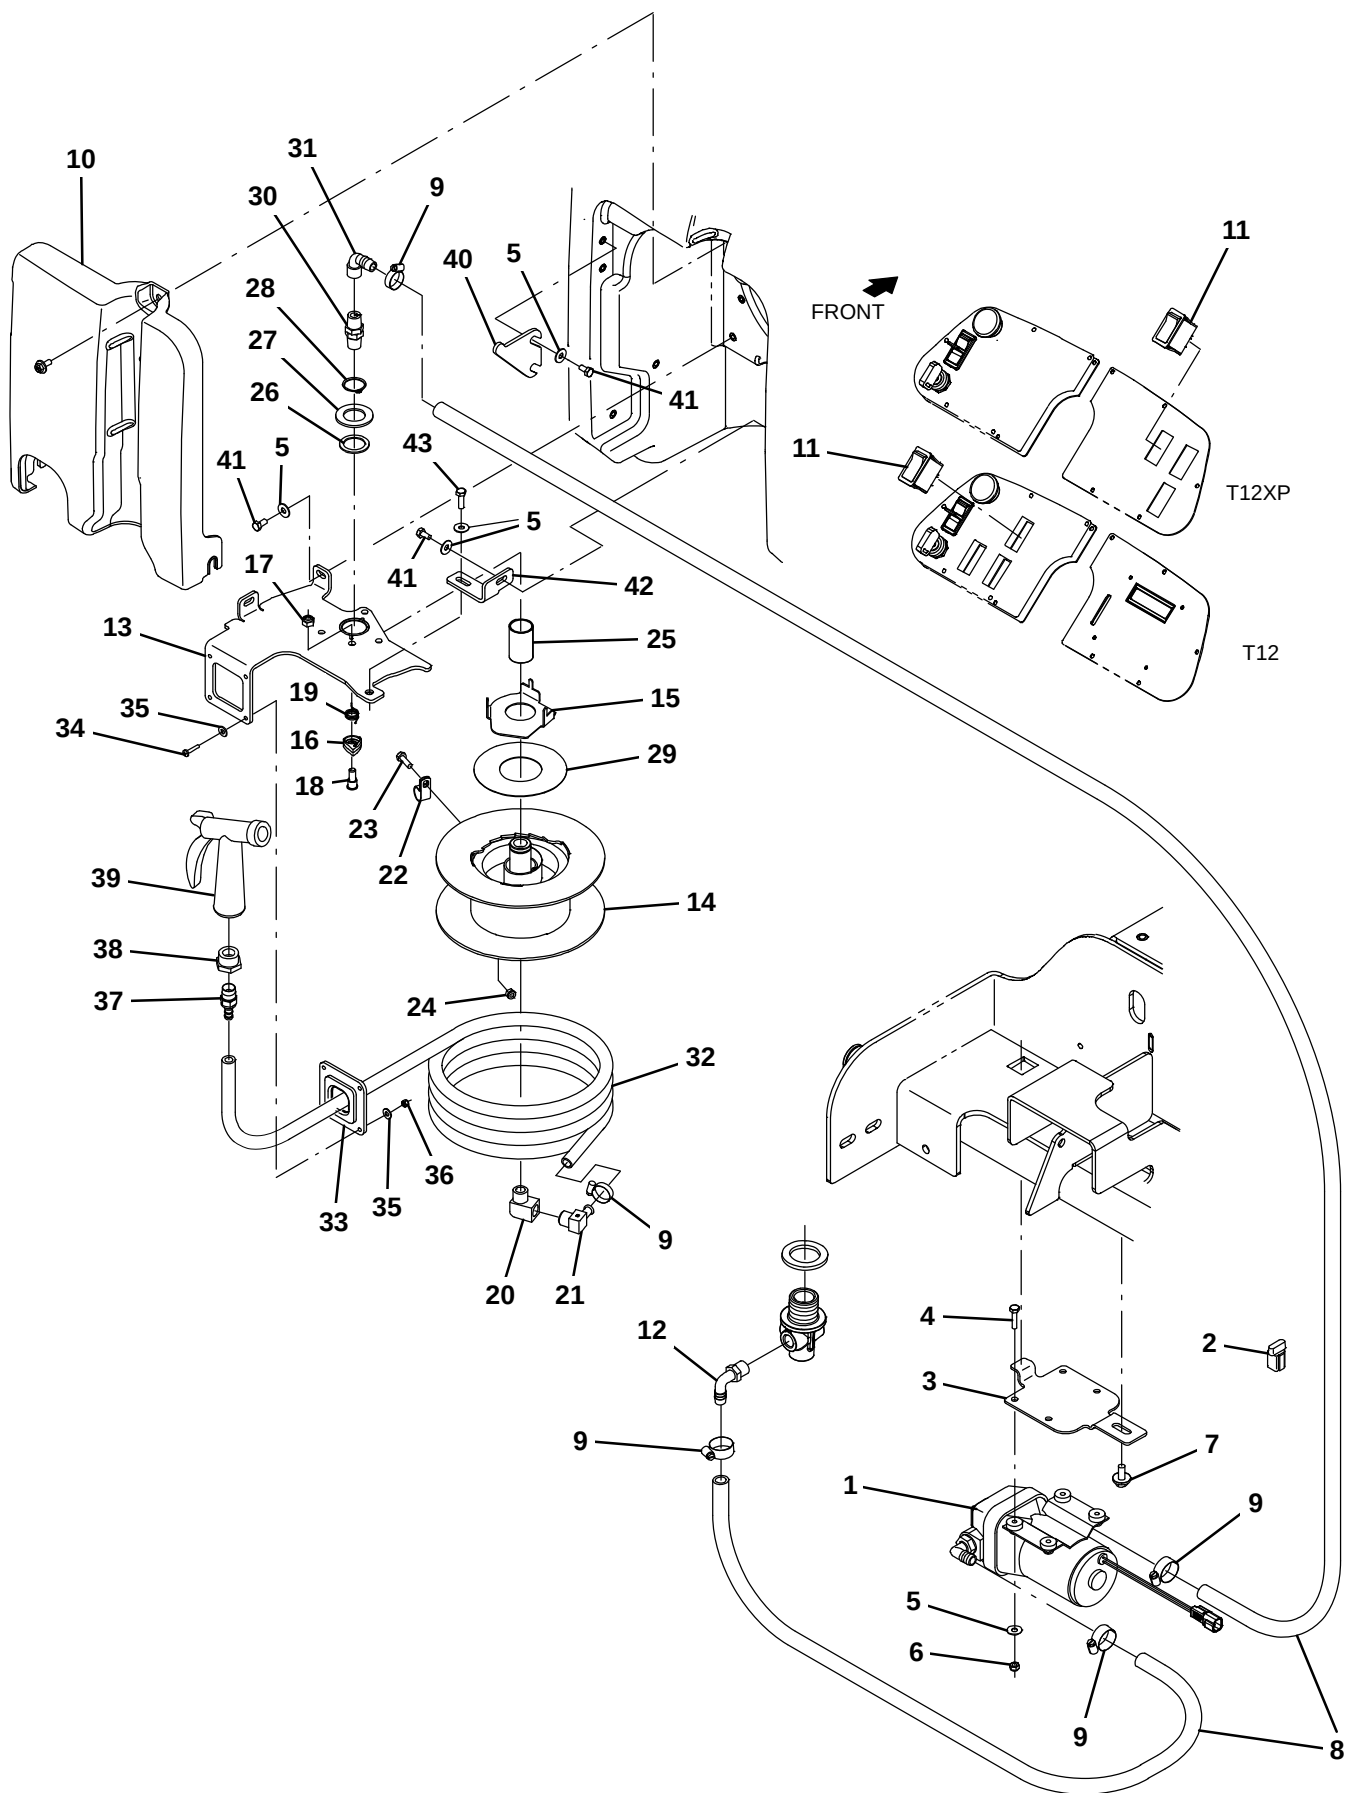


Fig. 17 – Spray Hose Kit

Ref.	Part No.	Serial Number	Description	Qty.
▽	9009852	(10000000–19999999)	Spray Hose Kit, Ci [T12]	1
▲	1 1054178	(10000000–19999999)	Pump, Soltn, Ele, 36vdc, 45psi	1
▲	2 1056982	(10000000–19999999)	Diode, Ele, Plug	1
▲	3 1201314	(10000000–19999999)	Bracket, Pump, Spray	1
▲	4 09007	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 25, Ss	4
▲	5 01684	(10000000–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	12
▲	6 08712	(10000000–19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	4
▲	7 1020341	(10000000–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	1
▲	8 1011412	(10000000–19999999)	Hose, Afmkt, Pvc, Brd, 0.50ld, 08Ft., Clr	1
▲	9 54333	(10000000–19999999)	Clamp, Hose, Wormdrive, 0.31–0.88d, .31w	5
▲	10 1202867	(10000000–19999999)	Cover, Access, Vacfan, Trimmed	1
▲	11 398500	(10000000–19999999)	Switch, Rocker, Dpdt, On / None / On	1
▲	12 64778	(10000000–19999999)	Fitting, Plstc, E90, Bm08/Pm06	1
▲	13 1200239	(10000000–19999999)	Plate Wldt, Mtg, Hose–Reel [Cassoday]	1
▲	14 1200313	(10000000–19999999)	Reel Assy, Hose, Small	1
▲	15 1203947	(10000000–19999999)	Washer, Retainer, Spring	1
▲	16 1201393	(10000000–19999999)	Pawl, Ratchet	1
▲	17 08709	(10000000–19999999)	Nut, Hex, Lock, M8 X 1.25, NI	1
▲	18 1056719	(10000000–19999999)	Bolt, Shld, .41d X 0.35, M8 X 1.25	1
▲	19 1201423	(10000000–19999999)	Spring, Torsion, Hose Reel	1
▲	20 24584	(10000000–19999999)	Fitting, Brs, E90, Pf06/Pm06, Spcl	1
▲	21 1060128	(10000000–19999999)	Fitting, Brs, E90, Bm06/Pm06, Short	1
▲	22 33584	(10000000–19999999)	Clamp, Cable, Stl, 0.63d X 0.50w, 1hole	1
▲	23 06943	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 20, 8.8	1
▲	24 08708	(10000000–19999999)	Nut, Hex, Lock, M6 X 1.00, NI	1
▲	25 1057816	(10000000–19999999)	Bushing, Sleeve, 1.00b 1.13d 1.750l, Fgl	1
▲	26 1057814	(10000000–19999999)	Washer, Thrust, Plstc 1.02b 1.38d	1
▲	27 32598	(10000000–19999999)	Washer, Flat, 1.02b 1.75d .12, Stl	1
▲	28 09005	(10000000–19999999)	Ring, Retaining, Ext, 1.00d, Basic	1
▲	29 1066919	(10000000–19999999)	Washer, Thrust, 50.0b 110.0d 0.79w	1
▲	30 1200394	(10000000–19999999)	Fitting, Swivel, Str, Pm06/Pm06, Brs	1
▲	31 47388	(10000000–19999999)	Fitting, Brs, E90, Em08/Pm06	1
▲	32 9010936	(10000000–19999999)	Hose, Spray, Afmkt [T12]	1
▲	33 1200665	(10000000–19999999)	Guide, Hose, Hdpe [Cassoday]	1
▲	34 12323	(10000000–19999999)	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	4
▲	35 01683	(10000000–19999999)	Washer, Flat, 10, Ss	8
▲	36 33932	(10000000–19999999)	Nut, Hex, Lock, M4 X 0.70, NI, Ss	4
▲	37 1060428	(10000000–19999999)	Fitting, Stl, Str, Bm06/Pm06, Swivel	1
▲	38 1027976	(10000000–19999999)	Fitting, Brs, Str, Pf06/Pm12	1
▲	39 769785	(10000000–19999999)	Nozzle, Spray, Gun	1
▲	40 1201096	(10000000–19999999)	Hook, Nozzle, Hdpe	1
▲	41 09744	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 12, Ss	6
▲	42 1200732	(10000000–19999999)	Plate, Mtg, Hose Reel	1
▲	43 08716	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 20, Ss	1

Fig. 18 – Vacuum Wand Kit

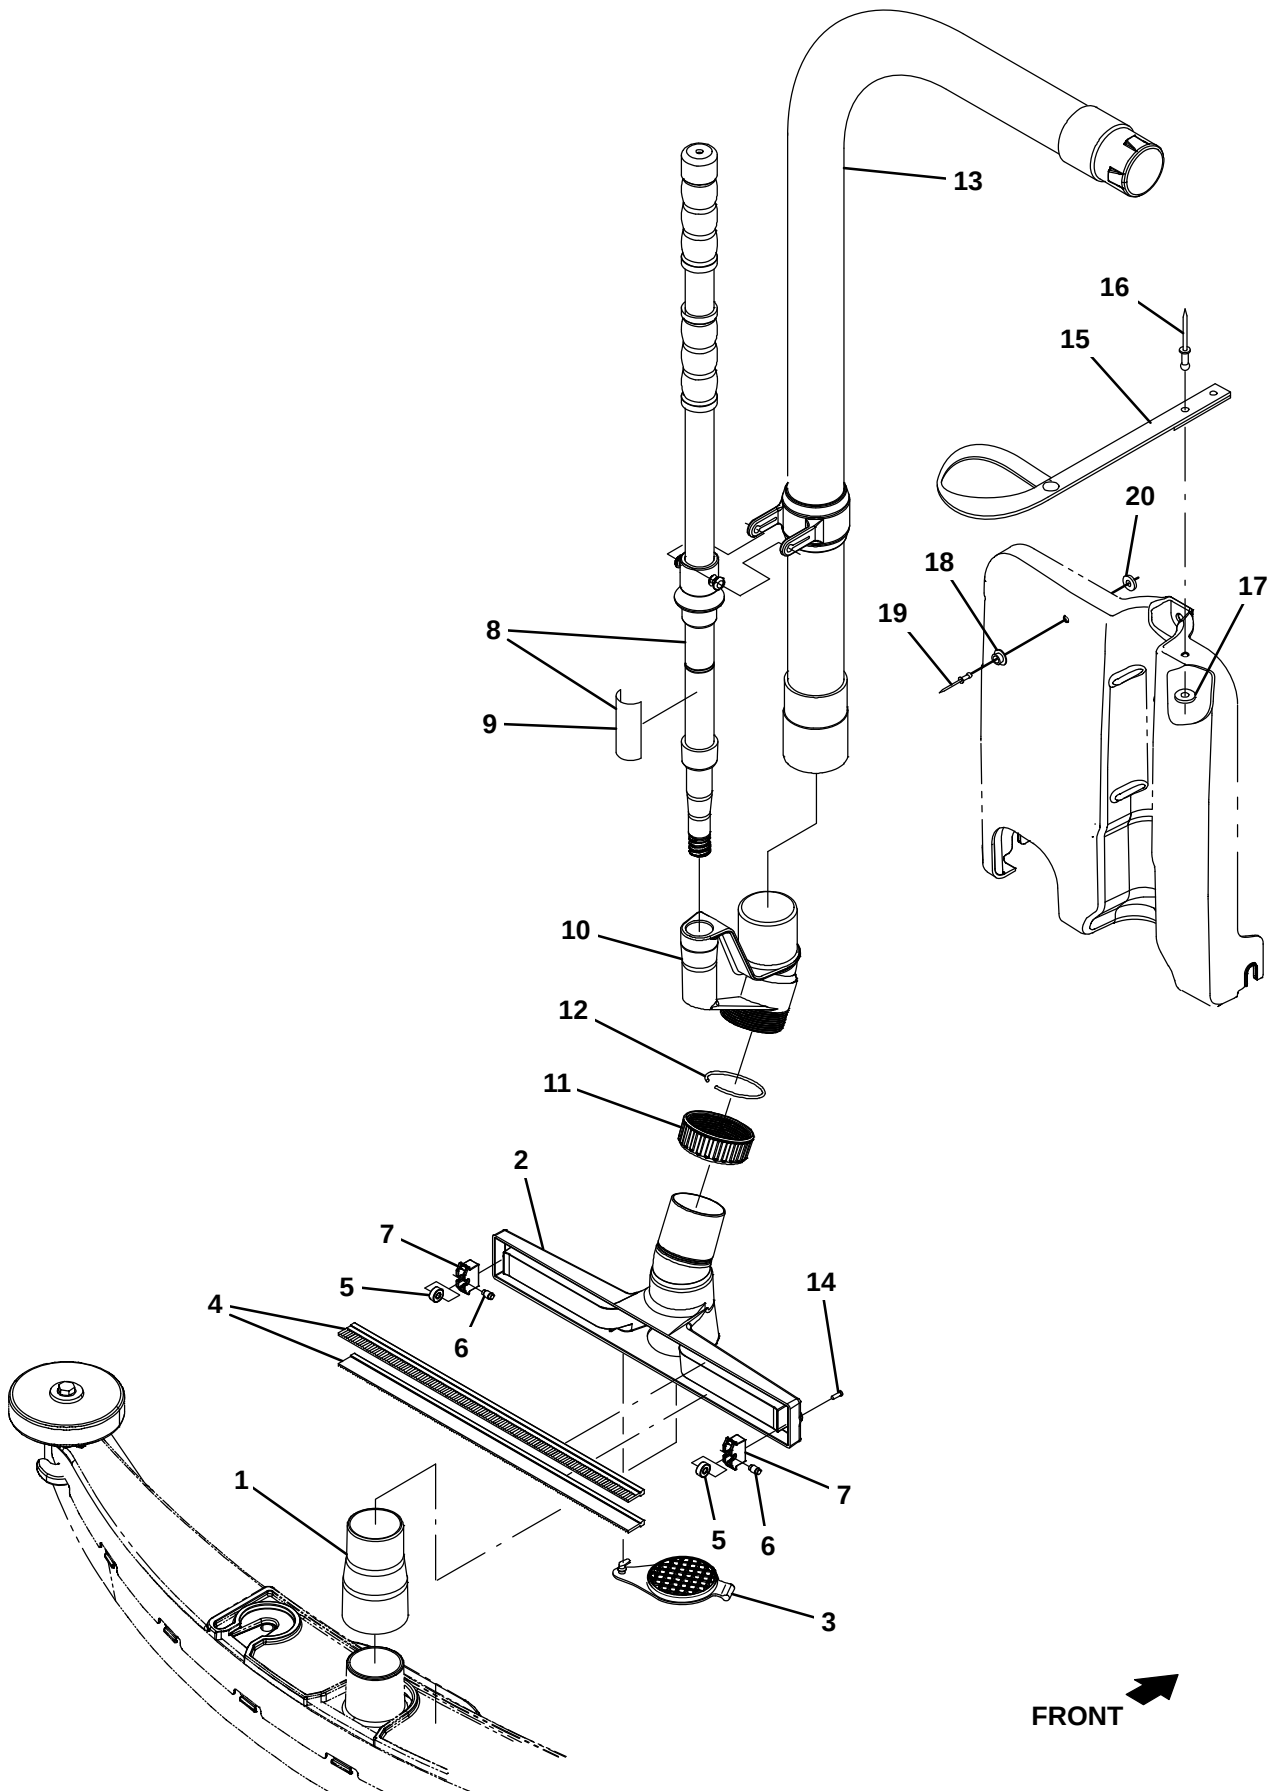


Fig. 18 – Vacuum Wand Kit

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9010356	(10000000–19999999)	Wand Kit, Wet, Ci [T12]	1
▲	1	1060536	(10000000–19999999)	Cuff, Adapter, 1.75 X 2.00, Pvc	1
▲	2	1060440	(10000000–19999999)	Squeegee, Hand	1
▲	3	1060691	(10000000–19999999)	Plug, Adapter, Port	1
▲	4	1061356	(10000000–19999999)	Retainer, Blade, Sqge, 14.2l (Set of 2)	1
▲	5	1061570	(10000000–19999999)	Bearing, Ball, 0.24b 0.51d 0.20w [2seal]	2
▲	6	1061571	(10000000–19999999)	Pin, Axle, Brg	2
▲	7	1022671	(10000000–19999999)	Housing, Sqge, Holder, Wheel, F/609648	2
▲▽	8	9008155	(10000000–19999999)	Handle Kit, Wand, Afmkt	1
▲▲	9	1062659	(10000000–19999999)	Label, Opertnl, Vacuum Wand Handle	1
▲	10	1060708	(10000000–19999999)	Adapter, Swivel, 1.75, Abs	1
▲	11	1060718	(10000000–19999999)	Nut, Compression, 2.25–12, Abs	1
▲	12	1060720	(10000000–19999999)	Ring, Compression	1
▲	13	1200642	(10000000–19999999)	Hose Assy, Sqge, W/2cuff [Cassoday]	1
▲	14	763149	(10000000–19999999)	Screw, Pan, 06– X 0.38, F/ Plstc	2
▲	15	1061811	(10000000–19999999)	Strap, Retainer, Handle	1
▲	16	1067350	(10000000–19999999)	Rivet, Blind, .188d X 0.53 X .62d, Alm	2
▲	17	86308	(10000000–19999999)	Washer, Flat, .19b .50d .06, Alm, Blind	2
▲	18	1061812	(10000000–19999999)	Catch, Snap, Push, Mal	1
▲	19	01335	(10000000–19999999)	Rivet, Blind, .125d X 0.44 X .25d, Alm	1
▲	20	02892	(10000000–19999999)	Washer, Flat, 0.12b 0.38d .03, Pl	1

Fig. 19 – Telemetry Group (S/N 10000000–10967790)

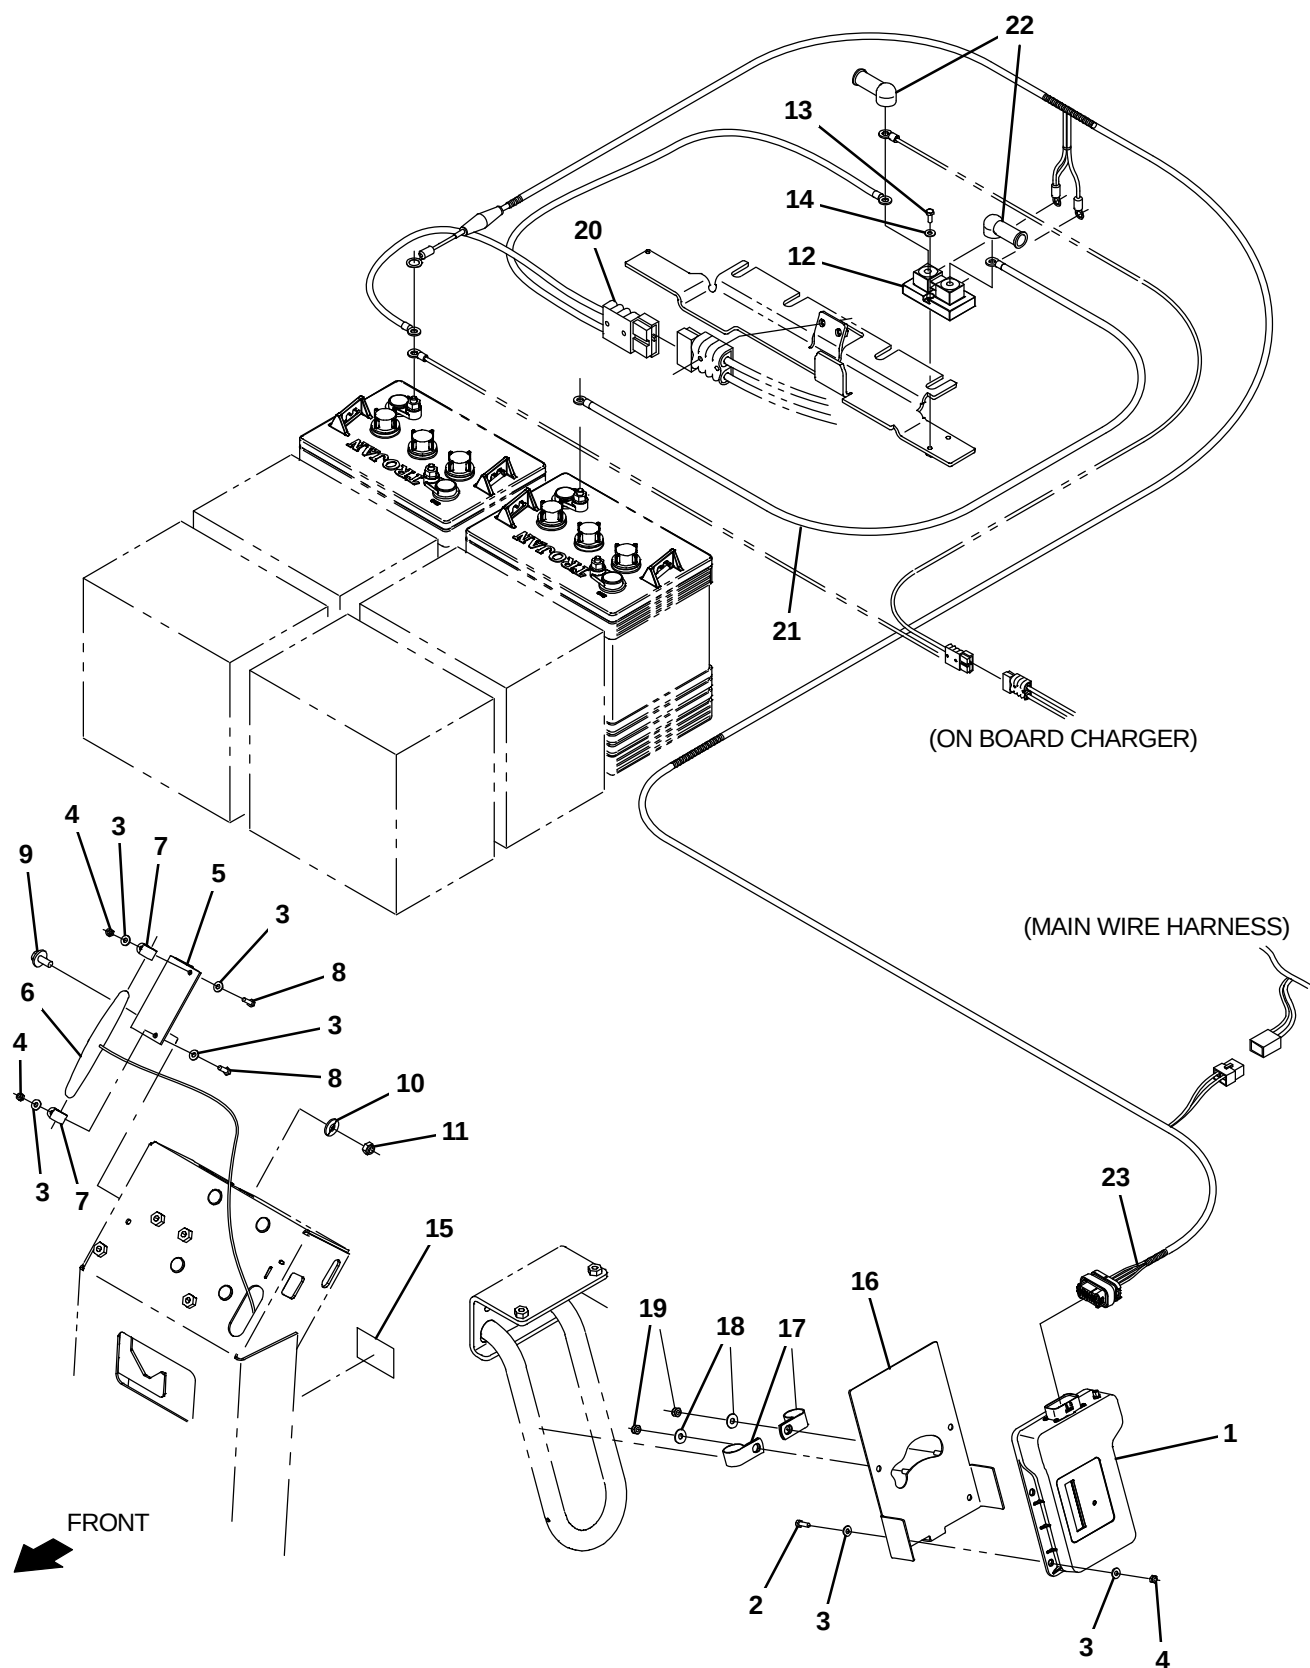


Fig. 19 – Telemetry Group (S/N 10000000–10967790)

Ref.	Part No.	Serial Number	Description	Qty.
1	1069467	(10000000–10967790)	Controlbox Assy, Telem [Usa, 3G]	1
1	1070541	(10000000–10967790)	Controlbox Assy, Telem [3G, Intl]	1
2	24199	(10000000–10967790)	Screw, Hex, M5 X 0.80 X 16, Ss	4
3	01683	(10000000–10967790)	Washer, Flat, 10, Ss	12
4	06549	(10000000–10967790)	Nut, Hex, Lock, M5 X 0.80, NI	6
5	1070402	(10000000–10967790)	Angle, Mtg, Antenna, Telem	1
6	1070659	(10000000–10967790)	Antenna, Telem, 70 In [Gprs]	1
7	140916	(10000000–10967790)	Clamp, Cable, Nyl, 0.62d, Nat	2
8	24199	(10000000–10967790)	Screw, Hex, M5 X 0.80 X 16, Ss	2
9	1020341	(10000000–10967790)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
10	01685	(10000000–10967790)	Washer, Flat, 0.38b 0.88d .08, Ss	2
11	08713	(10000000–10967790)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
12	1070384	(10000000–10967790)	Shunt, 050mv 250a	1
13	12323	(10000000–10967790)	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	2
14	19064	(10000000–10967790)	Washer, Flat, 0.16b 0.38d .05, Pl, 06	2
15	1069580	(10000000–10967790)	Label, Opertnl, Telem [Fcc/lc]	1
16	1203695	(10000000–10967790)	Bracket Wldt, Mtg, Box	1
17	69234	(10000000–10967790)	Clamp, Cable, Stil, 1.00d X 0.75w, 1hole	2
18	01684	(10000000–10967790)	Washer, Flat, 0.27b 0.69d .05, Ss	2
19	08712	(10000000–10967790)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2
20	1070978	(10000000–10967790)	Cable Assy, 4ga [T12 – Telemetry]	1
21	1070498	(10000000–10967790)	Cable, 4ga, Blk [6200e, Telemetry]	1
22	611221	(10000000–10967790)	Boot, Terminal, Battery, 25.4mm, Blk	2
▽ 23	1070042	(10000000–10967790)	Harness, Ele, [Telemetry T12]	1
▲	9009990	(10000000–10967790)	Fuse. 002A. 250Vdc, Cartridge	1

Fig. 20 – Telemetry Group (S/N 10967791–19999999)

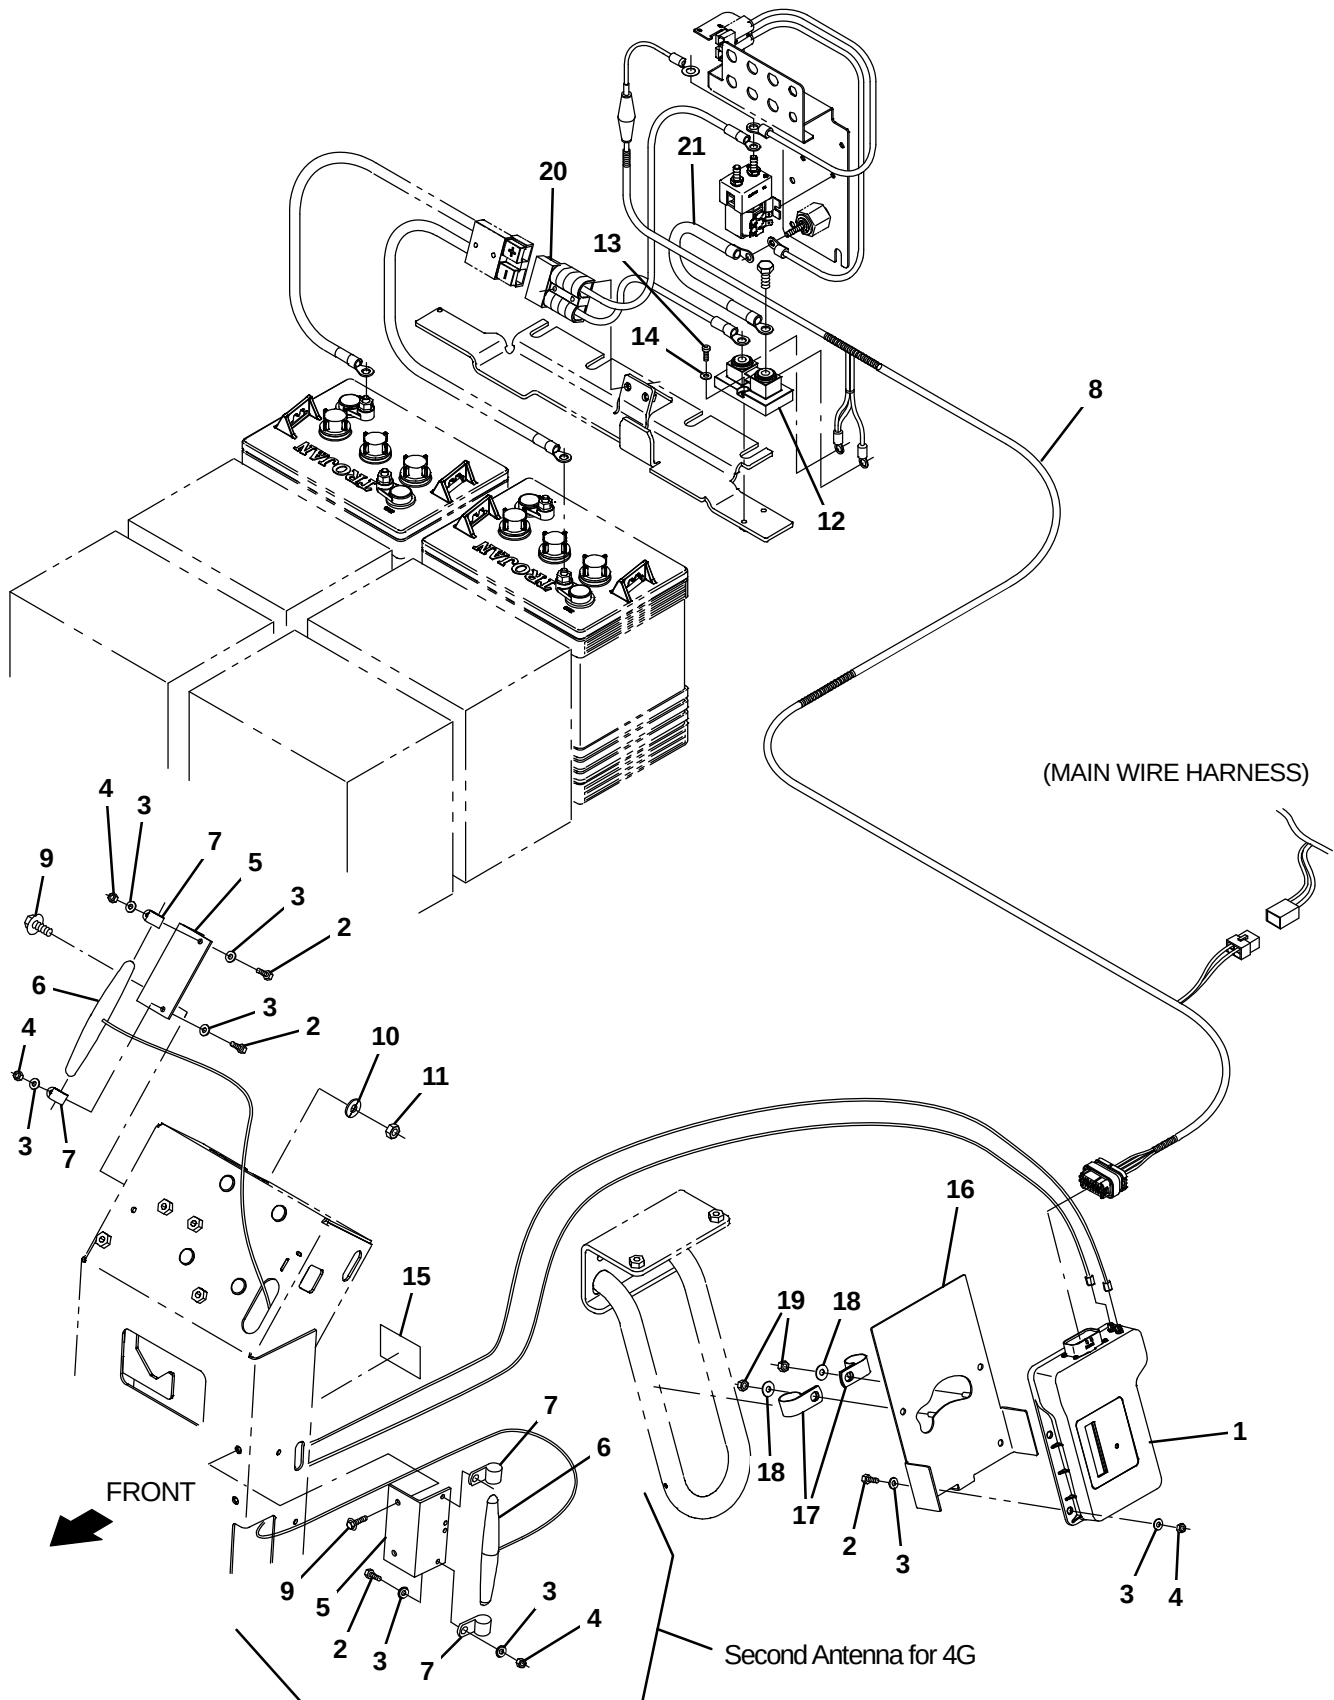


Fig. 20 – Telemetry Group (S/N 10967791–19999999)

Ref.	Part No.	Serial Number	Description	Qty.	
1	9010085	(10967791–19999999)	Control Box Assy Kit, Replmt, Telem[USA]	1	
1	9010086	(10967791–19999999)	Control Box Assy Kit, Replmt, Telem[INTL]	1	
2	24199	(10967791–19999999)	Screw, Hex, M5 X 0.80 X 16, Ss	8	
3	01683	(10967791–19999999)	Washer, Flat, 10, Ss	16	
4	06549	(10967791–19999999)	Nut, Hex, Lock, M5 X 0.80, NI	8	
▽ ▲	5	1070402	(10967791–19999999)	Angle, Mtg, Antenna, Telem	2
	6	1247522	(10967791–19999999)	Antenna, Telem [4G, 72"]	2
	7	140916	(10967791–19999999)	Clamp, Cable, Nyl, 0.62d, Nat	4
	8	1070042	(10967791–19999999)	Harness, Ele, [Telemetry T12]	1
		9009990	(10967791–19999999)	Fuse. 002A. 250Vdc, Cartridge	1
	9	06947	(10967791–19999999)	Screw, Hex, M6 X 1.00 X 40, 8.8	4
	10	01685	(10967791–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
	11	08713	(10967791–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
	12	1070384	(10967791–19999999)	Shunt, 050mv 250a	1
	13	12323	(10967791–19999999)	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	2
14	19064	(10967791–19999999)	Washer, Flat, 0.16b 0.38d .05, Pl, 06	2	
15	1069580	(10967791–19999999)	Label, Opertnl, Telem [Fcc/lc]	1	
16	1203695	(10967791–19999999)	Bracket Wldt, Mtg, Box	1	
17	69234	(10967791–19999999)	Clamp, Cable, Stl, 1.00d X 0.75w, 1hole	2	
18	01684	(10967791–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	2	
19	08712	(10967791–19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2	
20	1076675	(10967791–19999999)	Cable Assy, 4ga [T12 – Litelem]	1	
21	1070358	(10967791–19999999)	Cable, 2ga, Blk, Telem [T16]	1	

Fig. 21 – Telemetry Group, Lithium-Ion Battery (S/N 10967791–19999999)

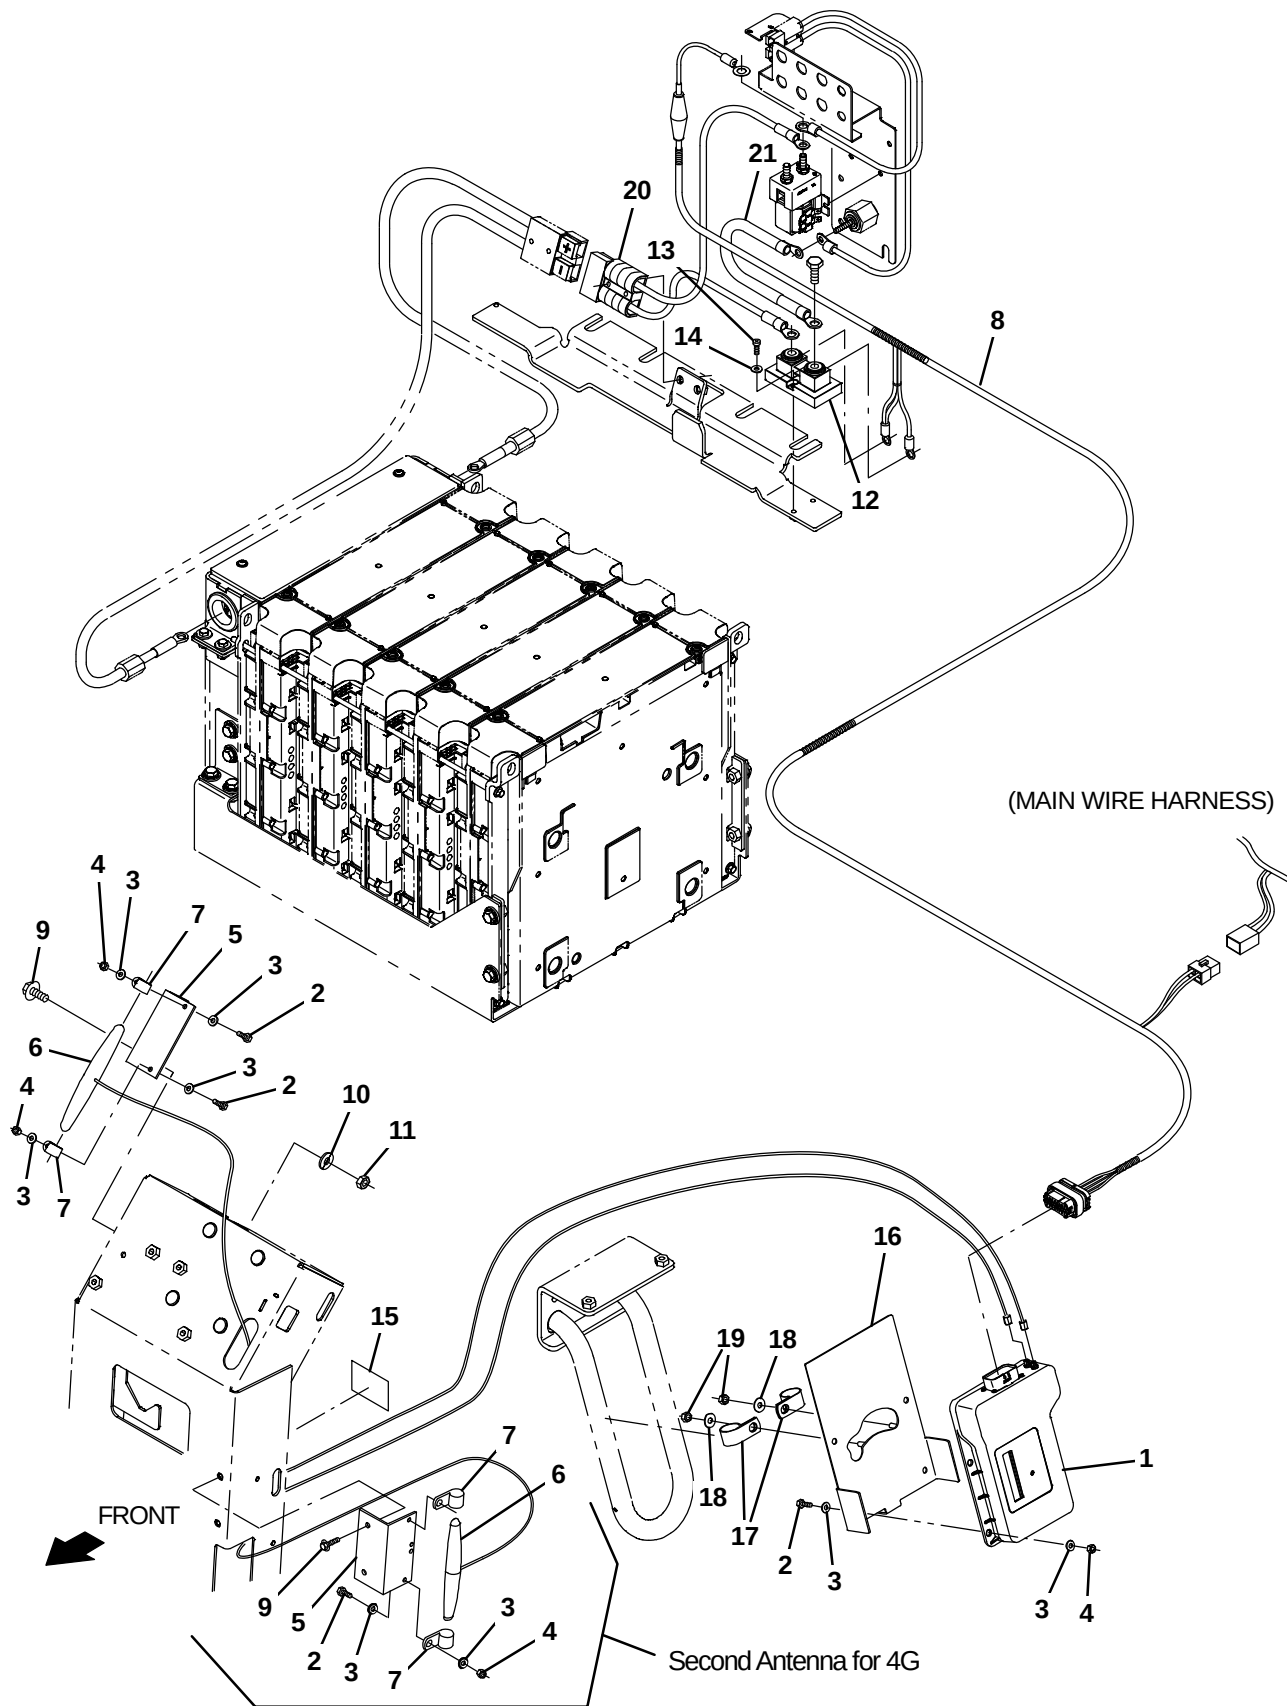


Fig. 21 – Telemetry Group, Lithium-Ion Battery (S/N 10967791–19999999)

Ref.	Part No.	Serial Number	Description	Qty.	
1	9010085	(10967791–19999999)	Control Box Assy Kit, Replmt, Telem[USA]	1	
1	9010086	(10967791–19999999)	Control Box Assy Kit, Replmt, Telem[INTL]	1	
2	24199	(10967791–19999999)	Screw, Hex, M5 X 0.80 X 16, Ss	8	
3	01683	(10967791–19999999)	Washer, Flat, 10, Ss	16	
4	06549	(10967791–19999999)	Nut, Hex, Lock, M5 X 0.80, NI	8	
▽ ▲	5	1070402	(10967791–19999999)	Angle, Mtg, Antenna, Telem	2
	6	124	(10967791–19999999)	Antenna, Telem, 70 In [Gprs]	2
	7	140916	(10967791–19999999)	Clamp, Cable, Nyl, 0.62d, Nat	4
	8	1070042	(10967791–19999999)	Harness, Ele, [Telemetry T12]	1
		9009990	(10967791–19999999)	Fuse. 002A. 250Vdc, Cartridge	1
	9	1020341	(10967791–19999999)	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
	10	01685	(10967791–19999999)	Washer, Flat, 0.38b 0.88d .08, Ss	2
	11	08713	(10967791–19999999)	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
	12	1070384	(10967791–19999999)	Shunt, 050mv 250a	1
	13	12323	(10967791–19999999)	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	2
14	19064	(10967791–19999999)	Washer, Flat, 0.16b 0.38d .05, Pl, 06	2	
15	1069580	(10967791–19999999)	Label, Opertnl, Telem [Fcc/lc]	1	
16	1203695	(10967791–19999999)	Bracket Wldt, Mtg, Box	1	
17	69234	(10967791–19999999)	Clamp, Cable, Stl, 1.00d X 0.75w, 1hole	2	
18	01684	(10967791–19999999)	Washer, Flat, 0.27b 0.69d .05, Ss	2	
19	08712	(10967791–19999999)	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2	
20	1076675	(10967791–19999999)	Cable Assy, 4ga [T12 – Litelem]	1	
21	1070358	(10967791–19999999)	Cable, 2ga, Blk, Telem [T16]	1	

Fig. 22 – Battery Group, 36V 360Ah

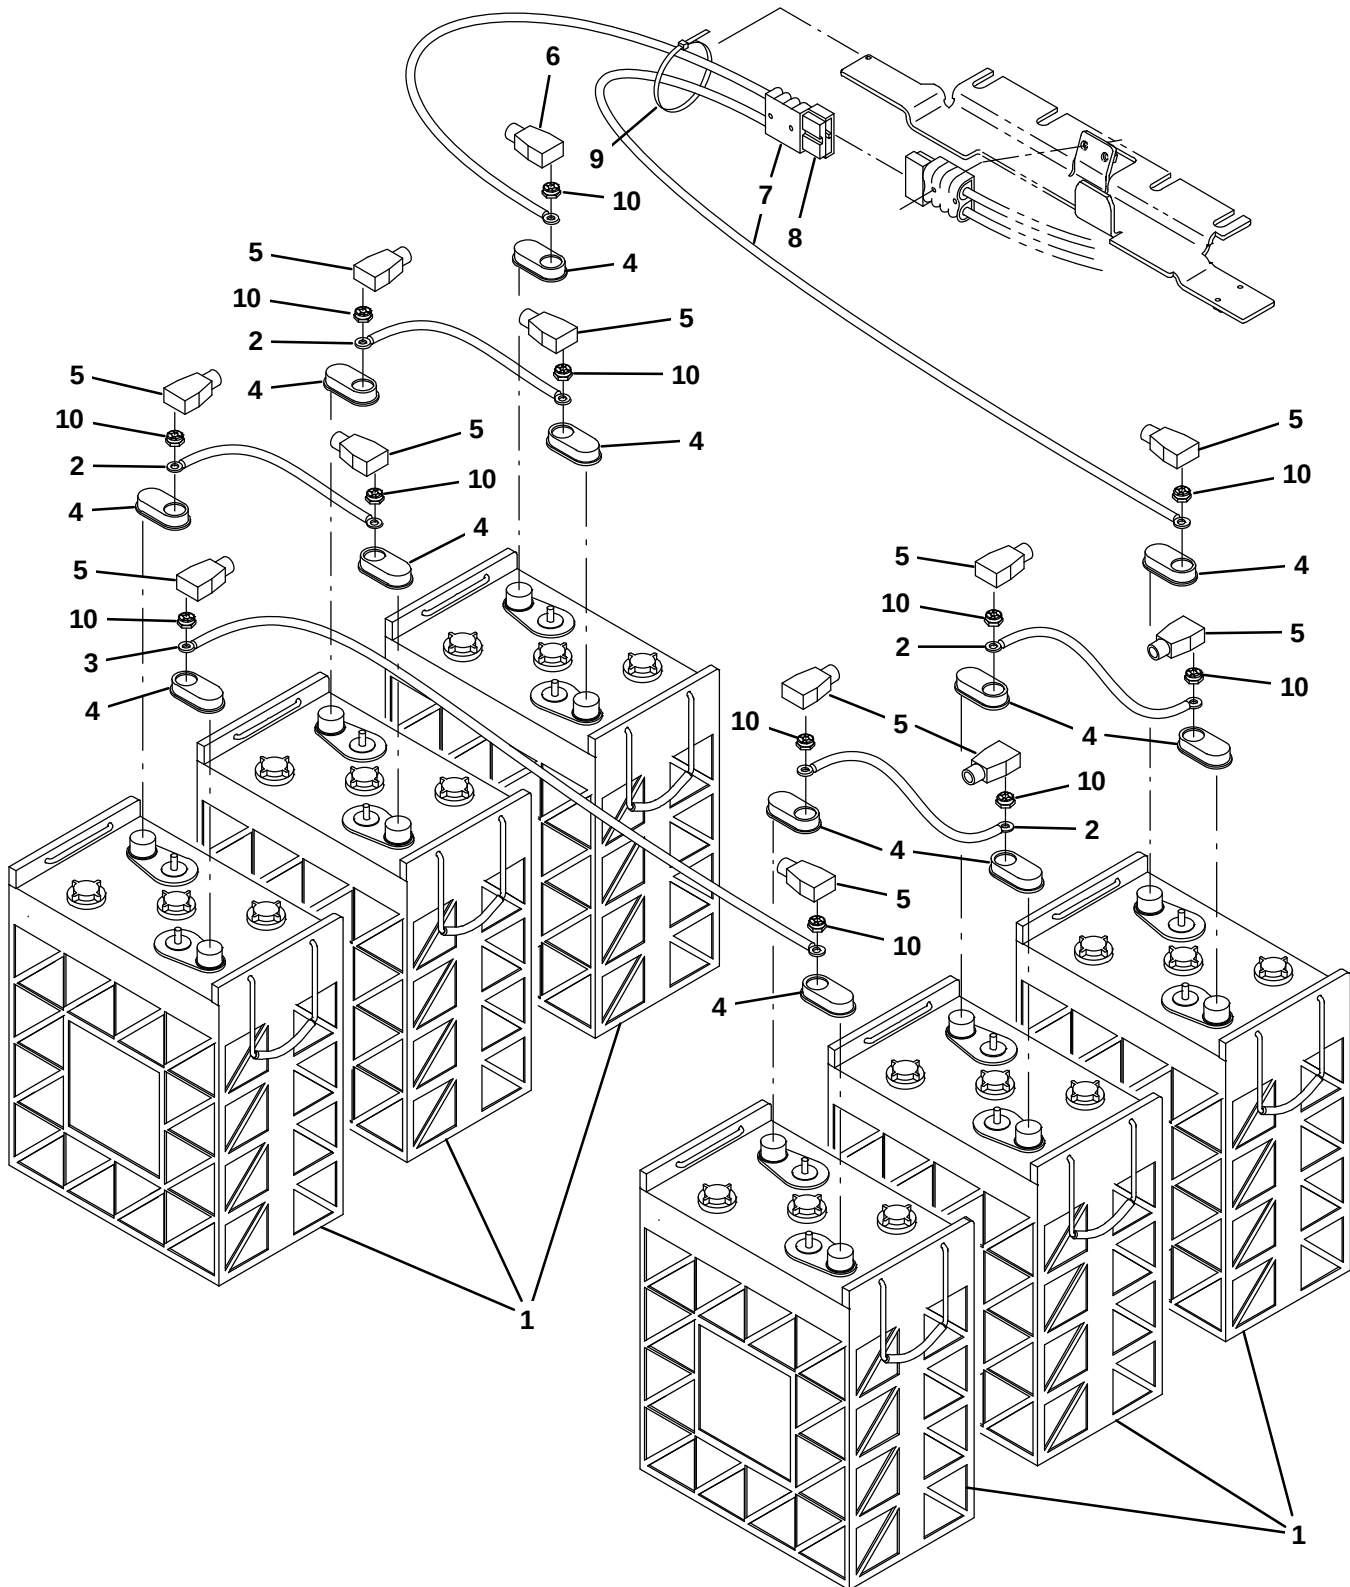


Fig. 22 – Battery Group, 36V 360Ah

Ref.	Part No.	Serial Number	Description	Qty.	
1	1070587	(10000000–19999999)	Battery, Wet, 06Vdc 0360Ah, W/Carton	6	
2	223356	(10000000–19999999)	Cable, 04ga 12.0l Blk .34ring /.34ring	4	
3	223364	(10000000–19999999)	Cable, 04ga 18.0l Blk .34ring /.34ring	1	
4	1041030	(10000000–19999999)	Cap, Battery	12	
5	68872	(10000000–19999999)	Boot, Terminal, Battery, 02–01Ga, Blk	10	
▽	6	68873	(10000000–19999999)	Boot, Terminal, Battery, 02–01Ga, Red	1
	7	223361	(10000000–19999999)	Cable Assy, 04ga .34ring /.34ring, 175a	1
▲	8	22892	(10000000–19999999)	Connector, Anderson, 175a, Gray	1
9	130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1	
10	87435	(10000000–19999999)	Nut, Hex, Flexlock, .31–18	12	

Fig. 23 – Battery Group, 36V 312Ah

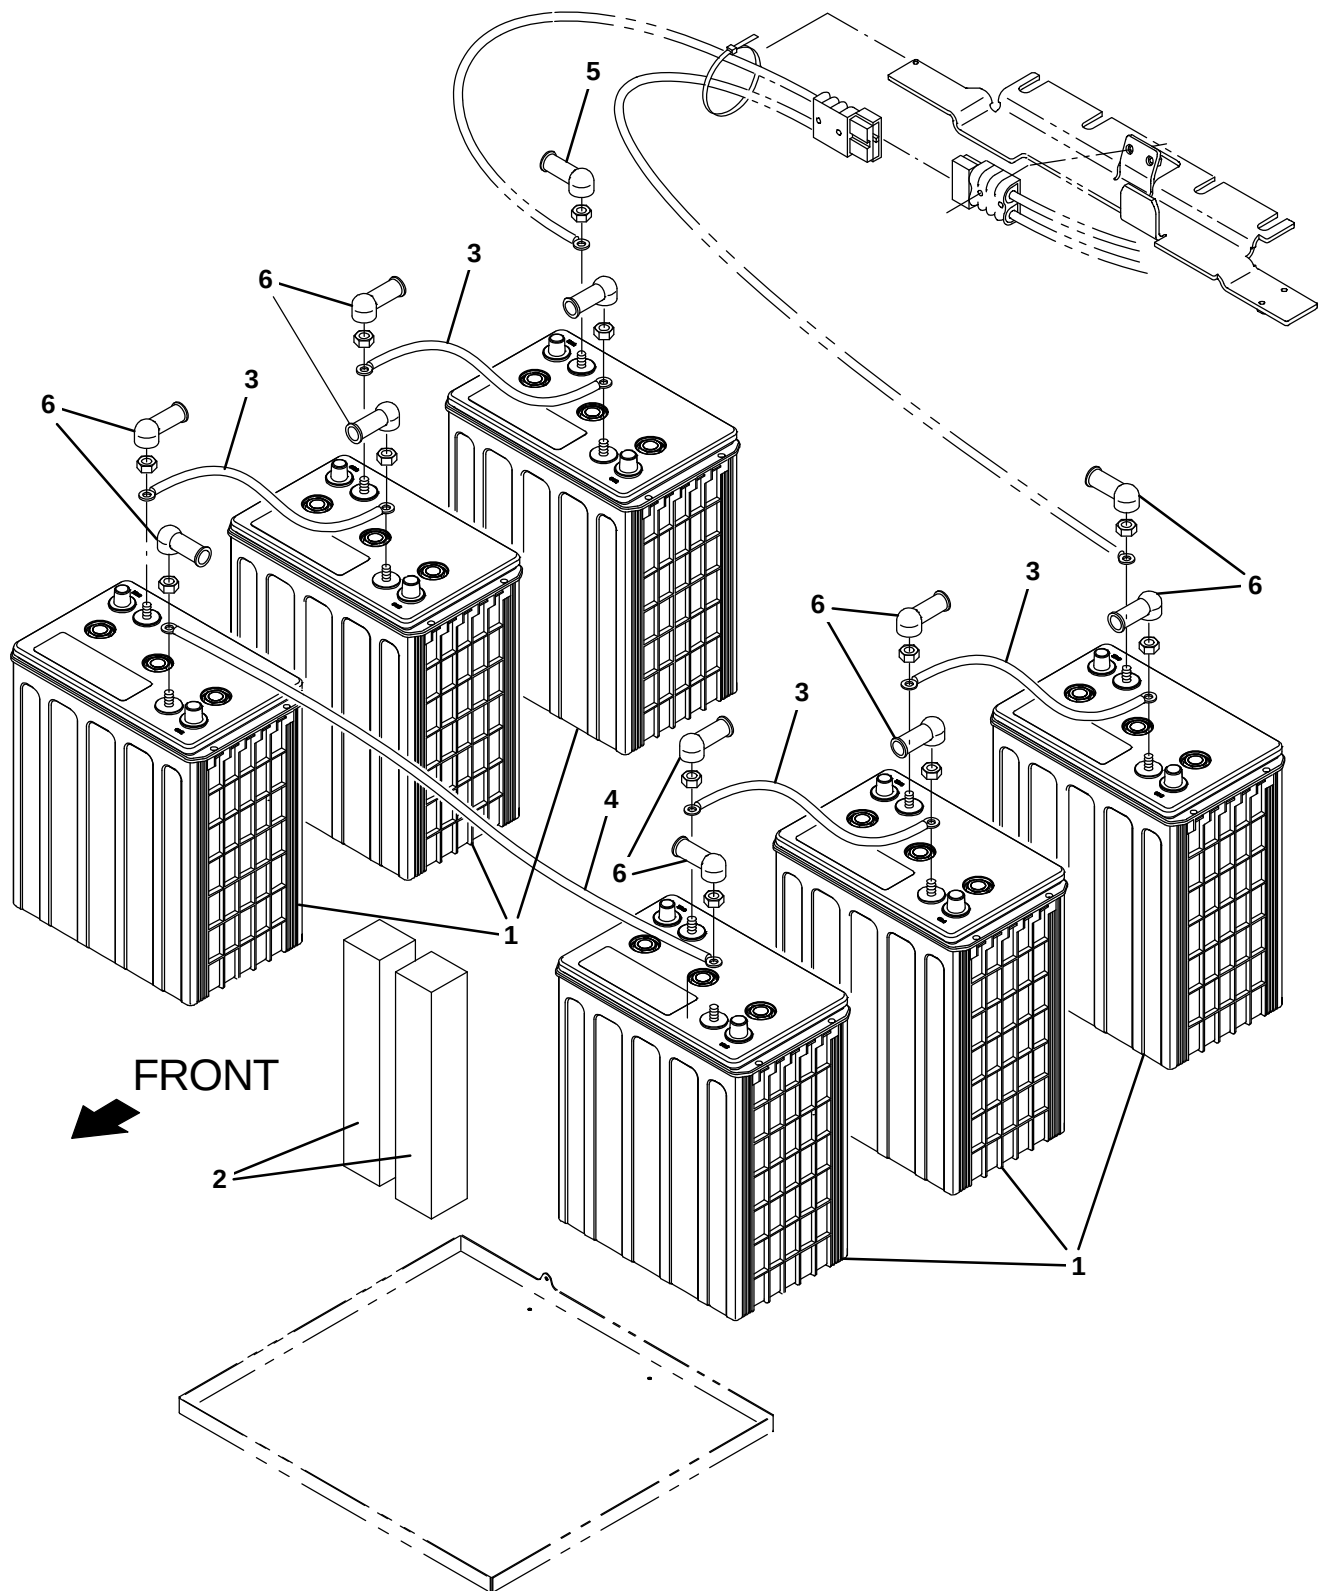


Fig. 22 – Battery Group, 36V 312Ah

Ref.	Part No.	Serial Number	Description	Qty.
1	1031914	(10000000–19999999)	Battery, Agm, 06vdc 0312ah [Discover]	6
2	83415	(10000000–19999999)	Spacer, Battery, Foam, 2.00 X 2.0 X 11.0	2
3	223355	(10000000–19999999)	Cable, 04ga 08.0l Blk .34ring /.34ring	4
4	223364	(10000000–19999999)	Cable, 04ga 18.0l Blk .34ring /.34ring	1
5	1016314	(10000000–19999999)	Boot, Bulb, .50id 1.00id 2.50l, Red	1
6	611221	(10000000–19999999)	Boot, Terminal, Battery, 25.4mm, Blk	11

Fig. 24 – Battery Group, Lithium-Ion, 36V, 10.2 Kwh

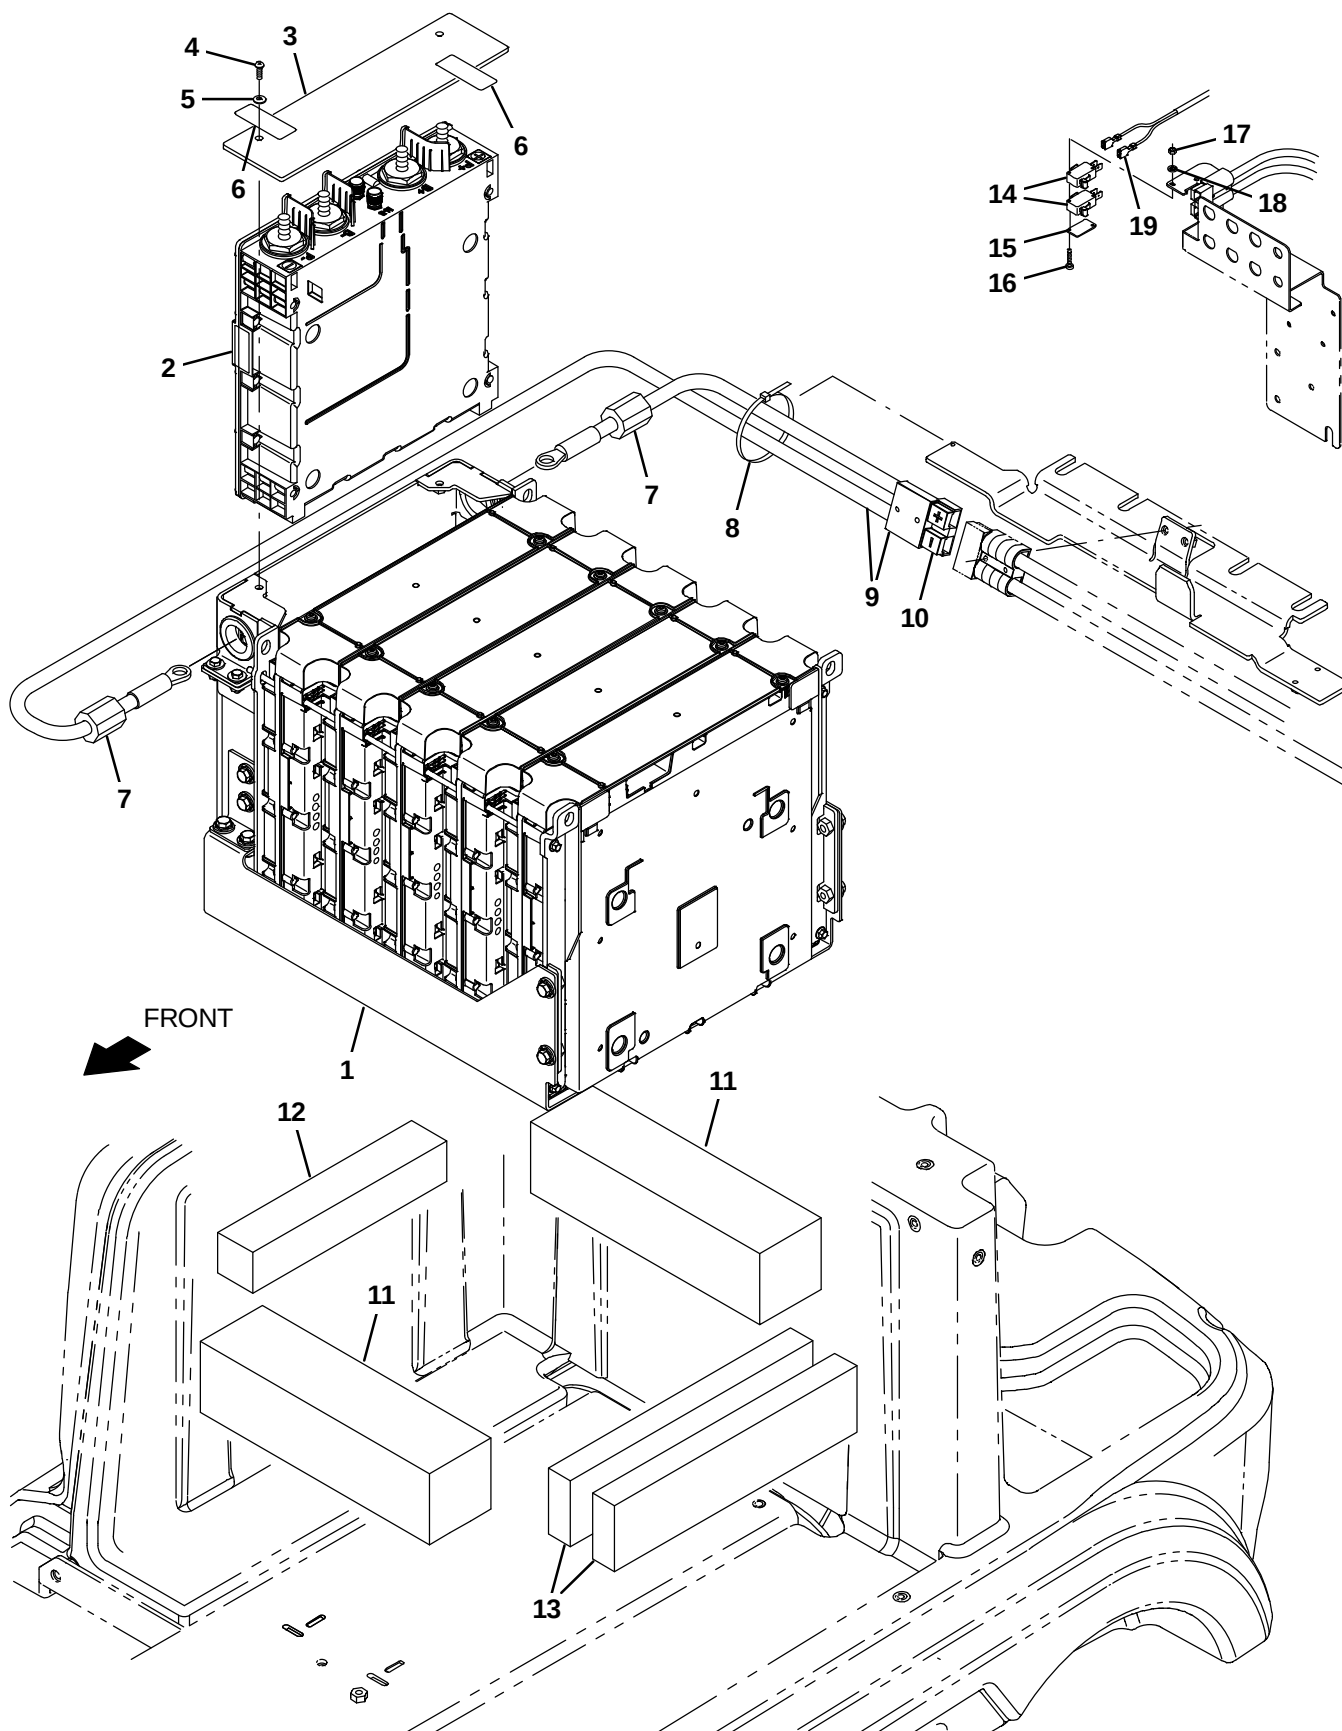


Fig. 24 – Battery Group, Lithium-Ion, 36V, 10.2 Kwh

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9019372	(10967791-19999999)	Battery Assy, Li-Ion, 36v, 10.2 Kwh	1
▲	2	1240228*	(10967791-19999999)	Controller, Battery, Li-Ion, 36vdc [Bms]	1
▲	3	1249104*	(10967791-19999999)	Plate, Cover	1
▲	4	1205799*	(10967791-19999999)	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
▲	5	01683*	(10967791-19999999)	Washer, Flat, 10, Ss	2
▲	6	1247763*	(10967791-19999999)	Label [Anti-Tamper]	12
▲	7	1052126*	(10967791-19999999)	Inductor, 12.7mmid [156 Imp At 25mhz]	2
▲	8	763115	(10967791-19999999)	Tie, Cable, 6.0l, 1.25d Max	2
▲▽	9	1076495*	(10967791-19999999)	Cable Assy, Battery, 02ga [T12,T16]	1
▲▲	10	22892*	(10967791-19999999)	Connector, Anderson, 175a, Gray	1
	11	1243753	(10967791-19999999)	Spacer, Battery, 3.5 X 3.5 X 13.0	2
	12	83415	(10967791-19999999)	Spacer, Battery, Foam, 2.00 X 2.0 X 11.0	1
	13	630375	(10967791-19999999)	Spacer, Battery, Foam, 1.25 X 3.3 X 13.7	2
	14	600437	(10967791-19999999)	Switch, Snap, 15a, Rlr	1
	15	601359	(10967791-19999999)	Plate, Backing, Switch	1
	16	06924	(10967791-19999999)	Screw, Pan, Phl, M3 X 0.50 X 30, 4.8	2
	17	579211	(10967791-19999999)	Nut, Hex, Lock, M3 X 0.50, NI, Ss	2
	18	39658	(10967791-19999999)	Washer, Lock, Int, 04	2
	19	1242133	(10967791-19999999)	Harness, Cntrl, Battery [Off-B T12 T16]	1

* Requires Tennant *True* service or an authorized Tennant service provider.

Fig. 25 – Battery Group, Lithium-Ion, 36V, 8.2 Kwh

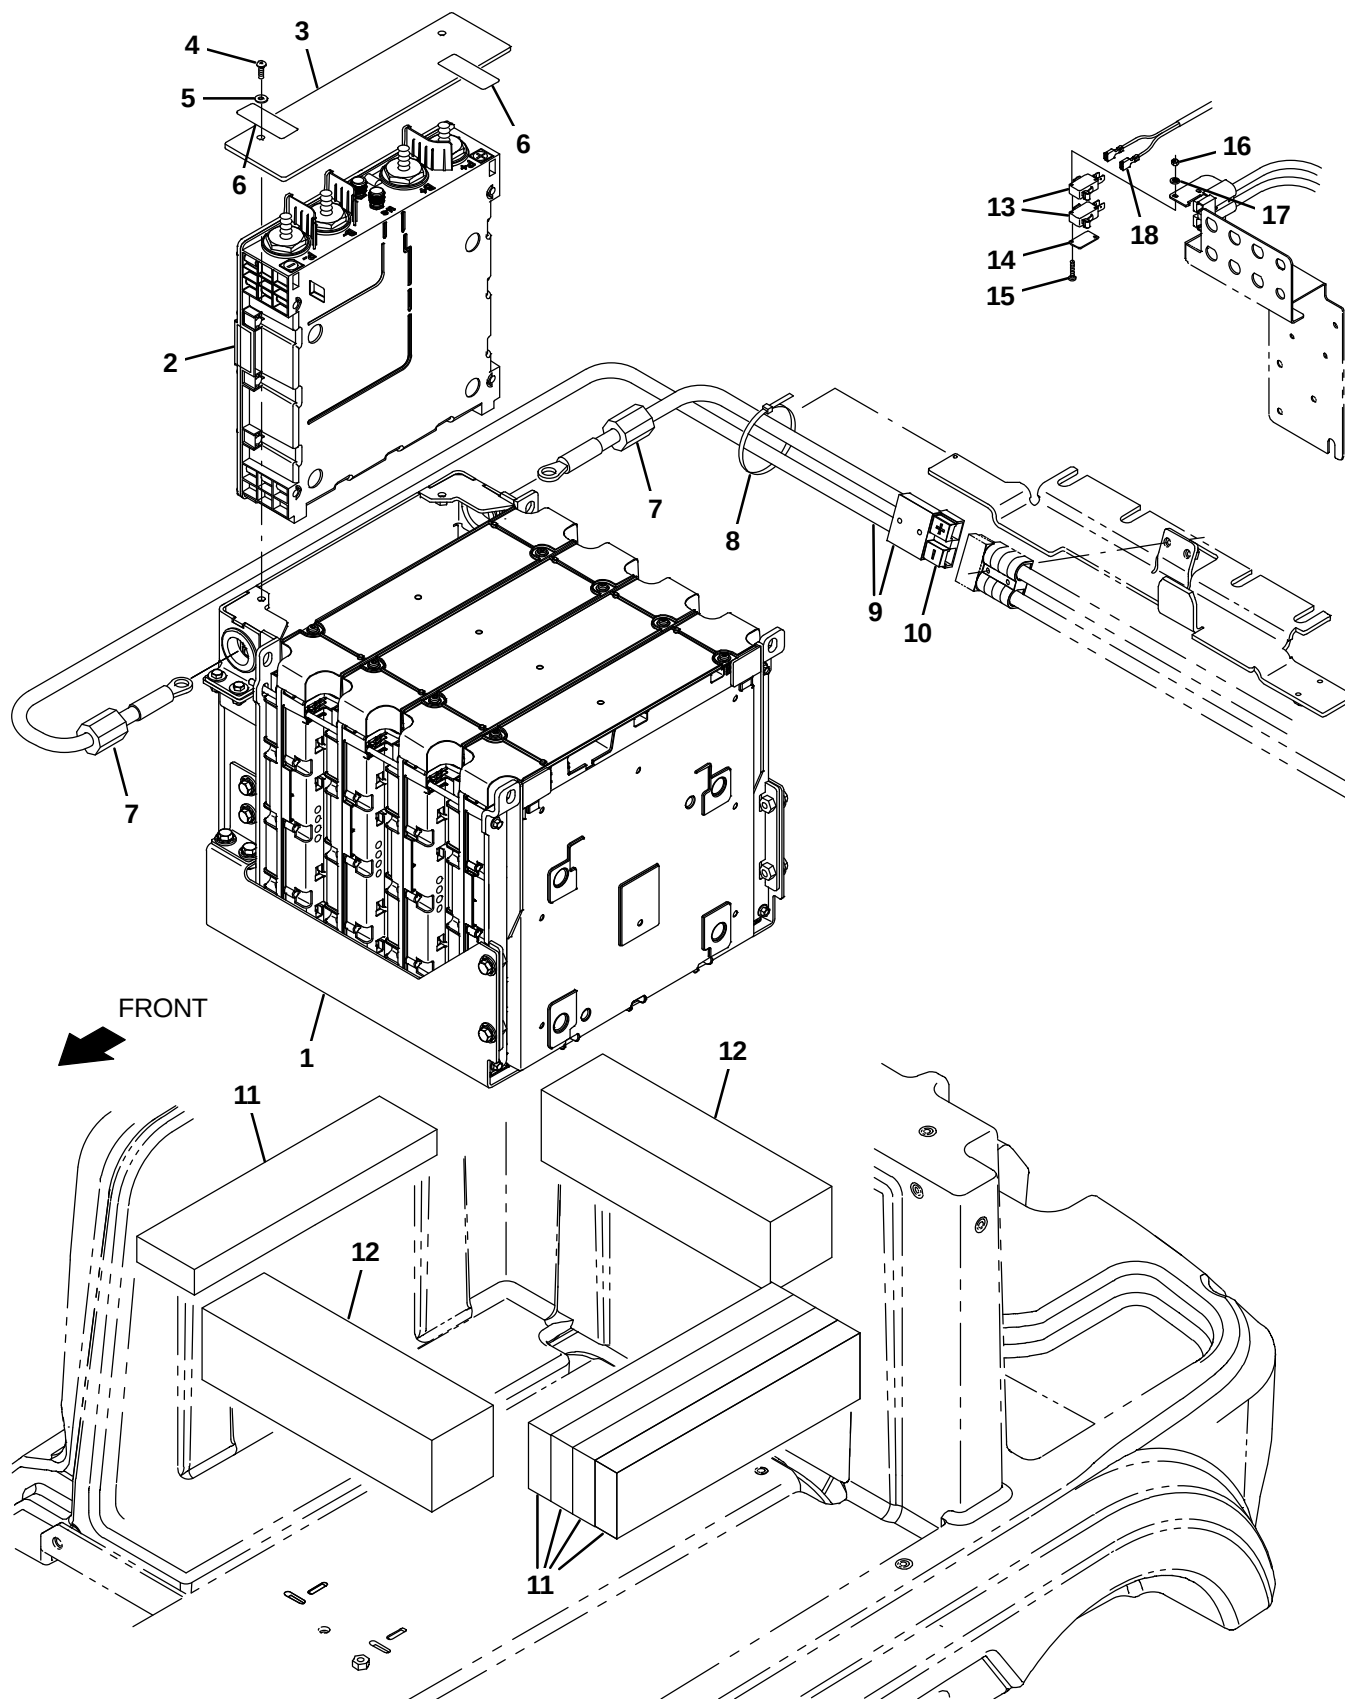


Fig. 25 – Battery Group, Lithium-Ion, 36V, 8.2 Kwh

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9019370	(10967791-19999999)	Battery Assy, Li-Ion, 36v, 8.2 Kwh	1
▲	2	1240228*	(10967791-19999999)	Controller, Battery, Li-Ion, 36vdc [Bms]	1
▲	3	1249104*	(10967791-19999999)	Plate, Cover	1
▲	4	1205799*	(10967791-19999999)	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
▲	5	01683*	(10967791-19999999)	Washer, Flat, 10, Ss	2
▲	6	1247763*	(10967791-19999999)	Label [Anti-Tamper]	10
▲	7	1052126*	(10967791-19999999)	Inductor, 12.7mmid [156 Imp At 25mhz]	2
▲	8	763115	(10967791-19999999)	Tie, Cable, 6.0l, 1.25d Max	2
▽▲	9	1076495*	(10967791-19999999)	Cable Assy, Battery, 02ga [T12,T16]	1
▲▲	10	22892*	(10967791-19999999)	Connector, Anderson, 175a, Gray	1
	11	630375	(10967791-19999999)	Spacer, Battery, Foam, 1.25 X 3.3 X 13.7	5
	12	1243753	(10967791-19999999)	Spacer, Battery, 3.5 X 3.5 X 13.0	2
	13	600437	(10967791-19999999)	Switch, Snap, 15a, Rlr	1
	14	601359	(10967791-19999999)	Plate, Backing, Switch	1
	15	06924	(10967791-19999999)	Screw, Pan, Phl, M3 X 0.50 X 30, 4.8	2
	16	579211	(10967791-19999999)	Nut, Hex, Lock, M3 X 0.50, NI, Ss	2
	17	39658	(10967791-19999999)	Washer, Lock, Int, 04	2
	18	1242133	(10967791-19999999)	Harness, Cntrl, Battery [Off-B T12 T16]	1

* Requires Tennant *True* service or an authorized Tennant service provider.

Fig. 26 – Battery Group, Lithium-Ion, 36V, 4.1 Kwh


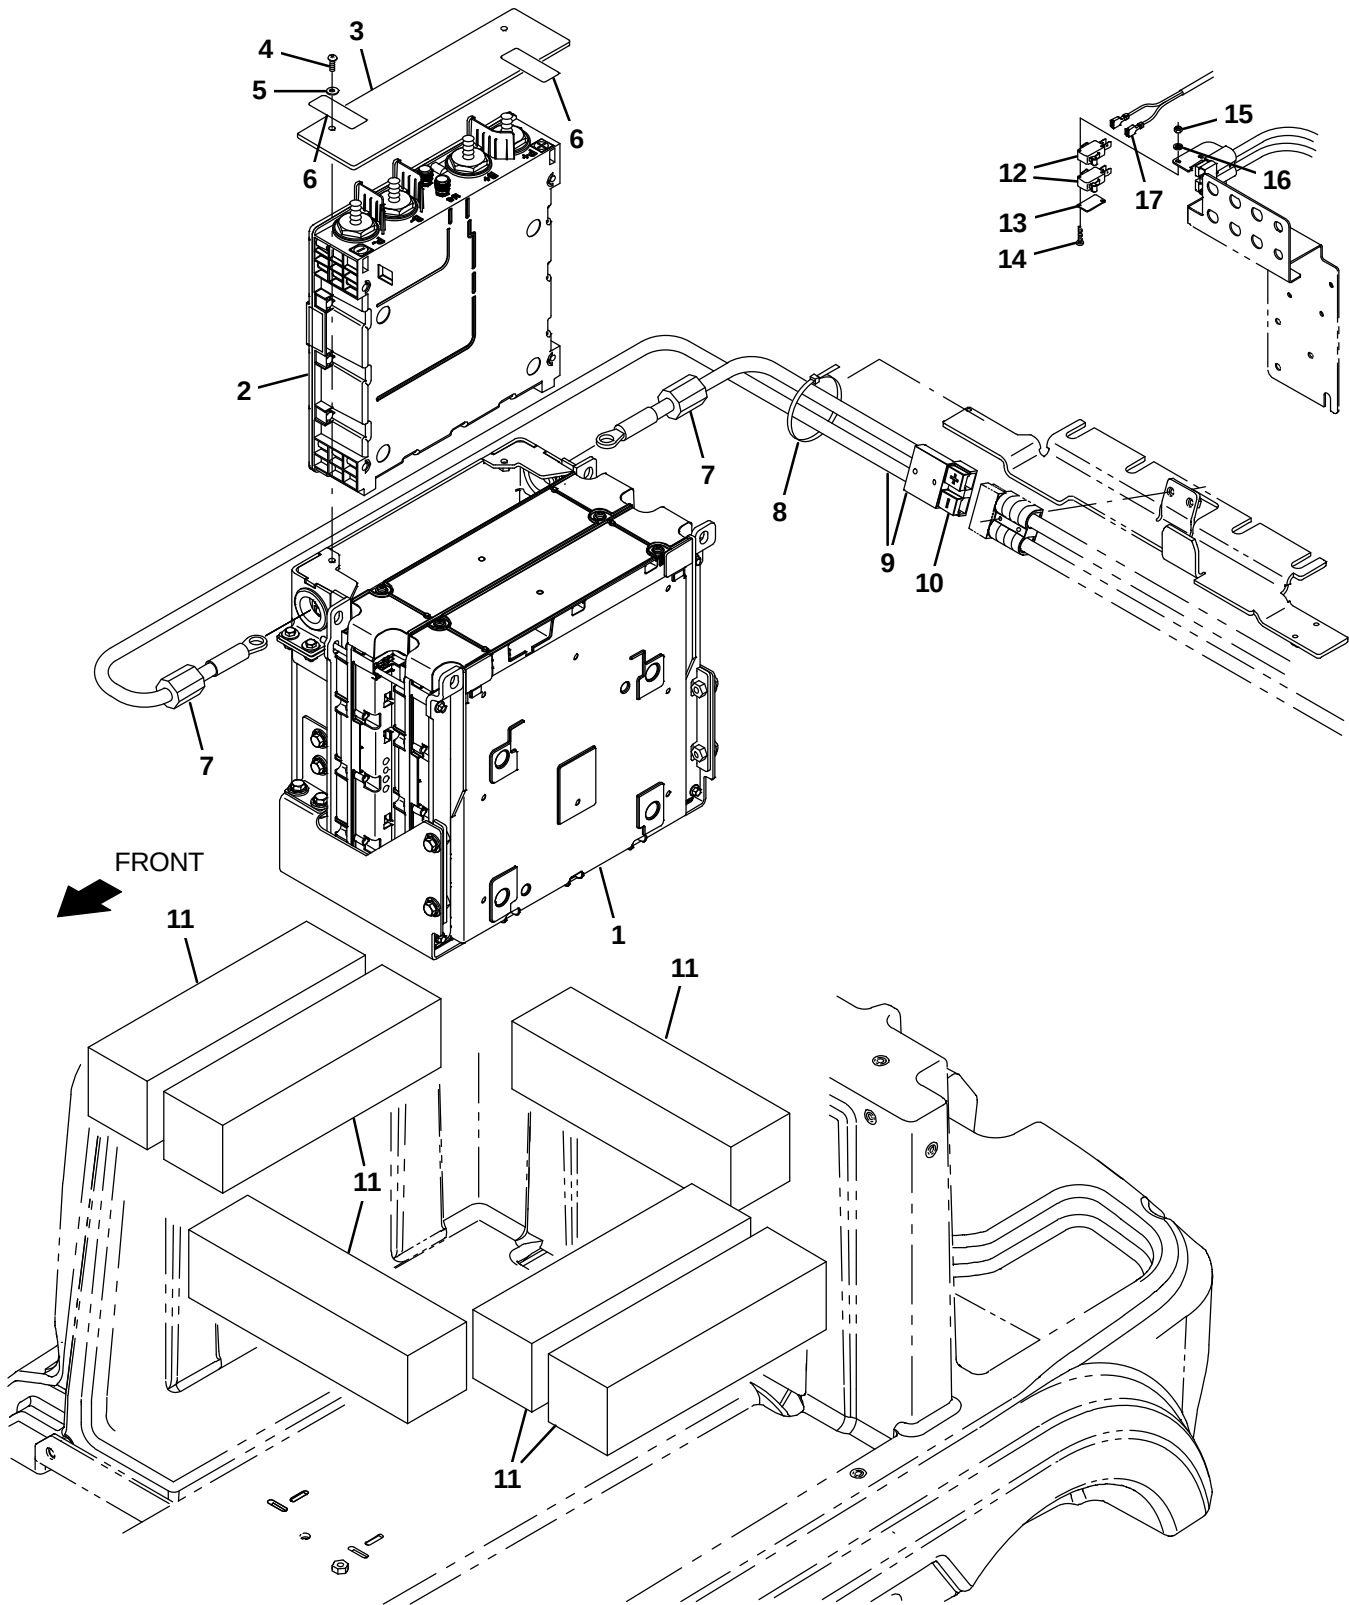


Fig. 26 – Battery Group, Lithium-Ion, 36V, 4.1 Kwh

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9019371	(10967791-19999999)	Battery Assy, Li-Ion, 36v, 4.1 Kwh	1
▲	2	1240228*	(10967791-19999999)	Controller, Battery, Li-Ion, 36vdc [Bms]	1
▲	3	1249104*	(10967791-19999999)	Plate, Cover	1
▲	4	1205799*	(10967791-19999999)	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
▲	5	01683*	(10967791-19999999)	Washer, Flat, 10, Ss	2
▲	6	1247763*	(10967791-19999999)	Label [Anti-Tamper]	6
▲	7	1052126*	(10967791-19999999)	Inductor, 12.7mmid [156 Imp At 25mhz]	2
▲	8	763115	(10967791-19999999)	Tie, Cable, 6.0l, 1.25d Max	2
▽▲	9	1076495*	(10967791-19999999)	Cable Assy, Battery, 02ga [T12,T16]	1
▲▲	10	22892*	(10967791-19999999)	Connector, Anderson, 175a, Gray	1
	11	1243753	(10967791-19999999)	Spacer, Battery, 3.5 X 3.5 X 13.0	6
	12	600437	(10967791-19999999)	Switch, Snap, 15a, Rlr	1
	13	601359	(10967791-19999999)	Plate, Backing, Switch	1
	14	06924	(10967791-19999999)	Screw, Pan, Phl, M3 X 0.50 X 30, 4.8	2
	15	579211	(10967791-19999999)	Nut, Hex, Lock, M3 X 0.50, NI, Ss	2
	16	39658	(10967791-19999999)	Washer, Lock, Int, 04	2
	17	1242133	(10967791-19999999)	Harness, Cntrl, Battery [Off-B T12 T16]	1

* Requires Tennant *True* service or an authorized Tennant service provider.


Fig. 27 – Lithium-Ion Battery Lifting Kit

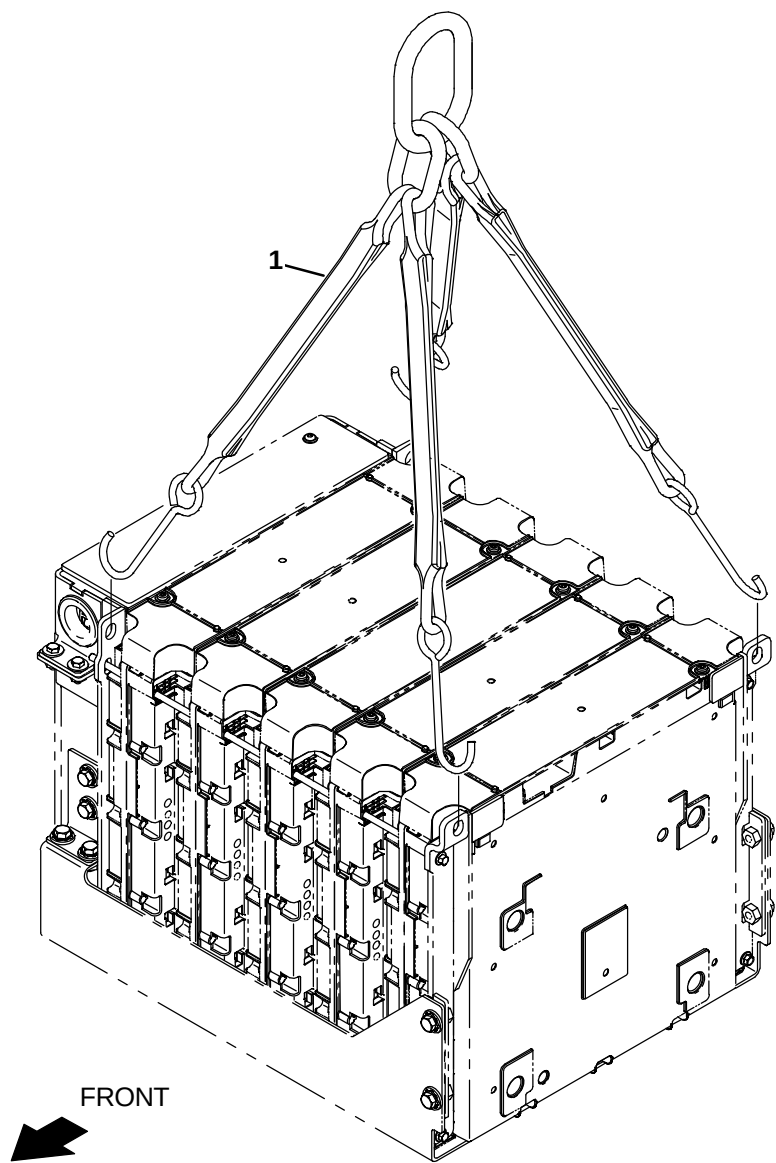

356950

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9020678	(10967791-19999999)	Parts Kit, Lift [Li-Ion]	1
▲	2	1249635	(10967791-19999999)	Hook Assy, Lift, Battery	1


Fig. 28 – Battery Charger Group

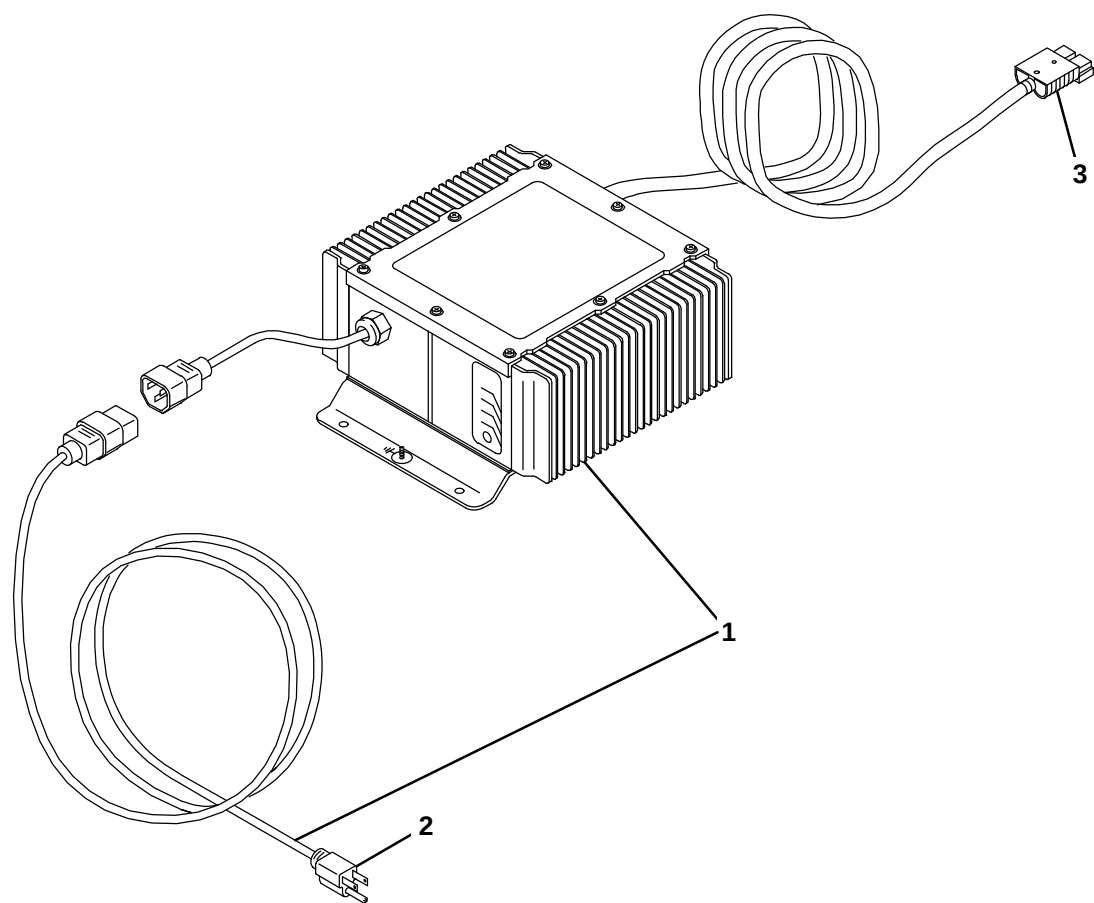

356199

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9001055	(10000000-19999999)	Charger Kit, 36vdc 021a, 1ph,Domestic,Ci	1
▲	2	1017079	(10000000-19999999)	Cord, Extn, 16ga /3, 10ft [Sjt]	1
▲	3	130155	(10000000-19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1


Fig. 29 – Battery Charger Group

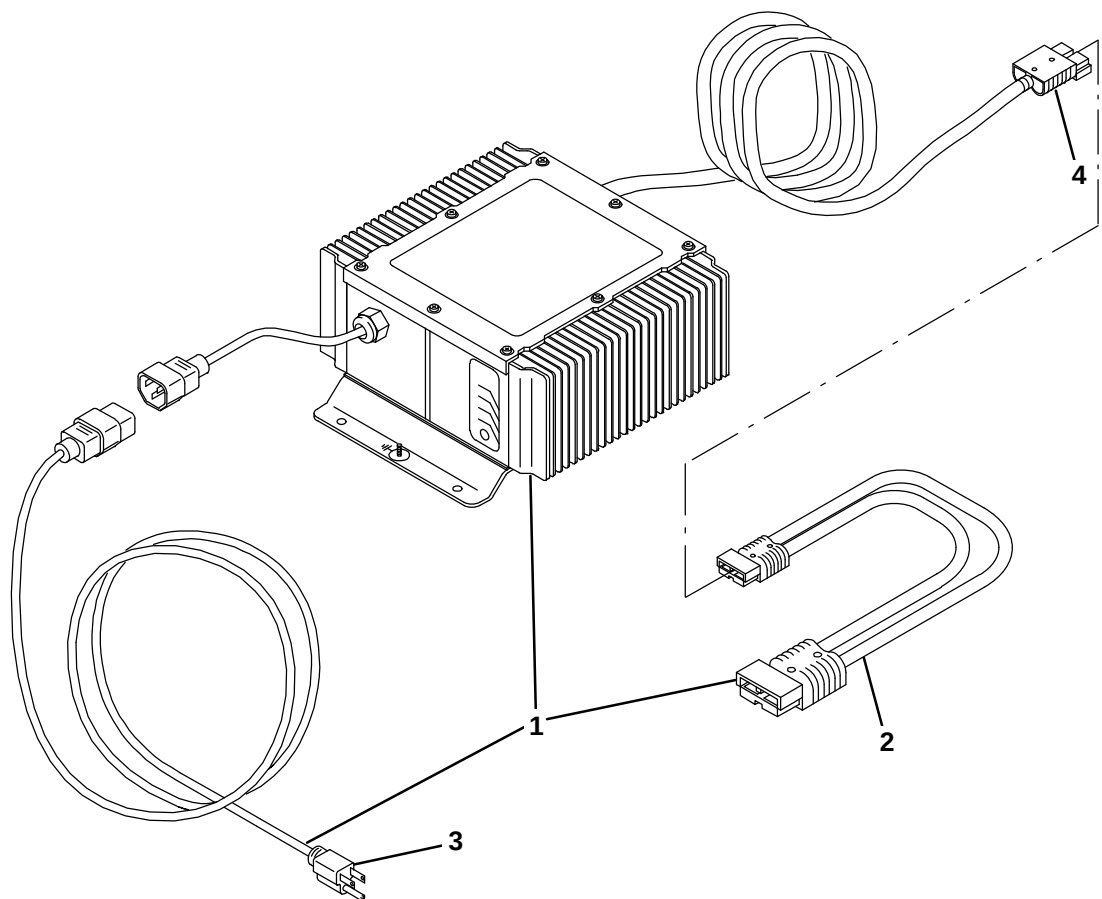

356200

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9020990	(10000000-19999999)	Charger Kit, Re-Prog	1
▲	2	223679	(10000000-19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1
▲	3	1017079	(10000000-19999999)	Cord, Extn, 16ga /3, 10ft [Sjt]	1
▲	4	130155	(10000000-19999999)	Connector, Battery, 6ga 50a, Grayt [2cont]	1


Fig. 30 – Battery Charger Group, International Only

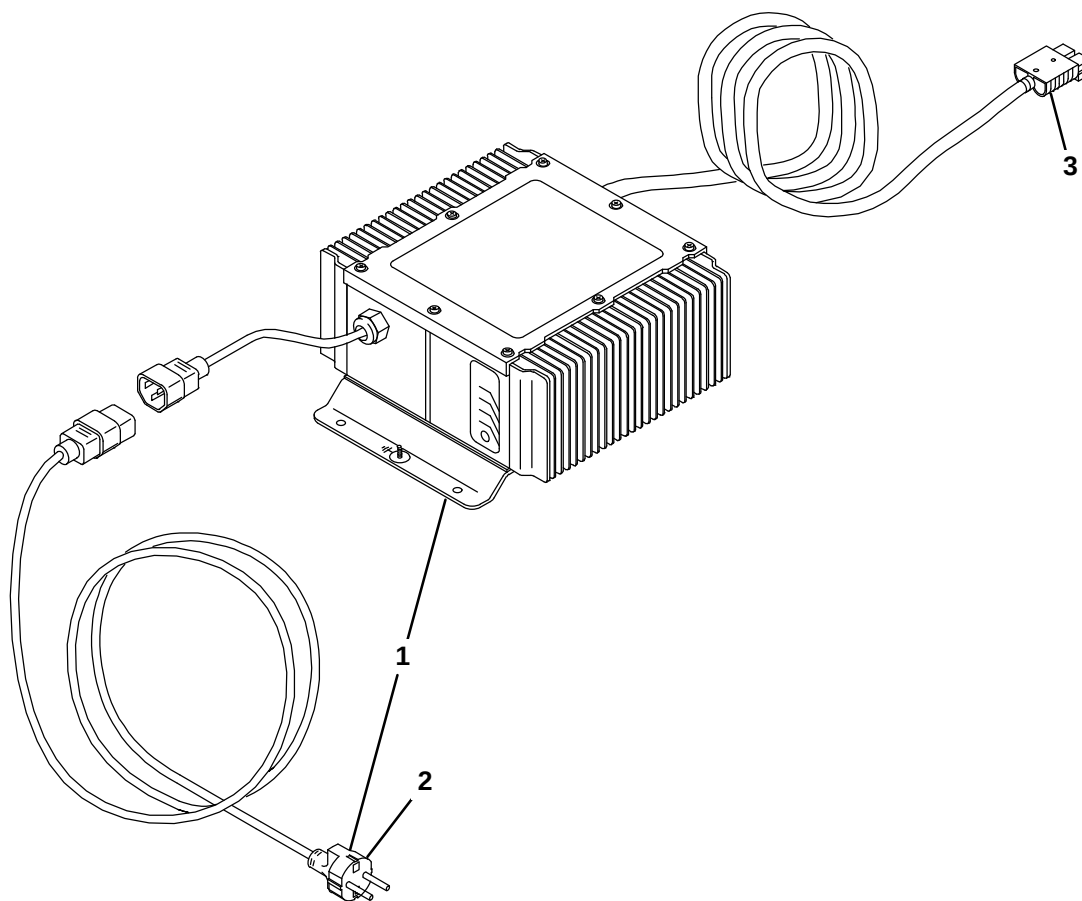

356201

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9001062	(10000000–19999999)	Charger Kit, 36vdc 021a, 1ph, Ci	1
▲	2	1019426	(10000000–19999999)	Cord, Chrgr, Ele, [Japanese]	1
▲	3	130155	(10000000–19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1
	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9001054	(10000000–19999999)	Charger Kit, 36Vdc 21A 85–265Vac, 1Ph 45/65Hz	1
▲	2	1019242	(10000000–19999999)	Cord, Chrgr, Ele {European}	1
▲	3	130155	(10000000–19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1


Fig. 31 – Battery Charger Group

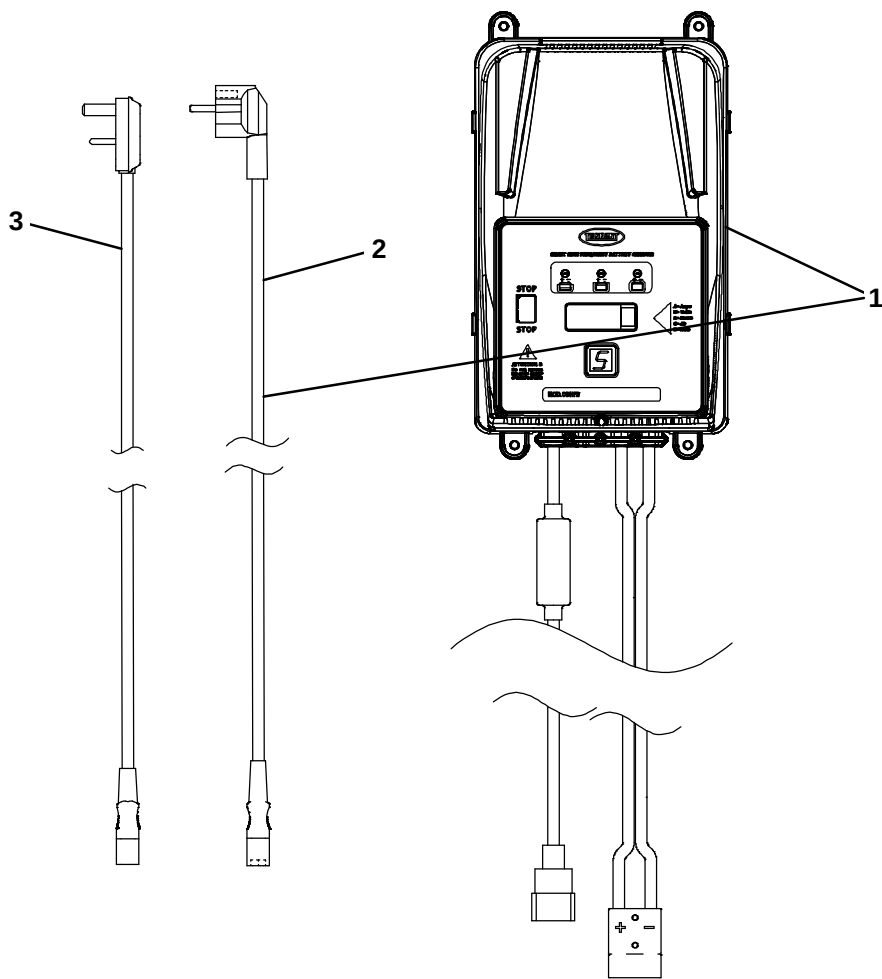

356376

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1076685	(10000000–19999999)	Charger, 36Vdc 030A Wet Sb050G 230Vac	1
▲	2	1043746	(10000000–19999999)	Cable, Charger Eu Bc5 & 7	1
▲	3	1041716	(10000000–19999999)	Cable, Charger Uk, Bc5 & 7 (UK Only)	1

Fig. 32 – Battery Chargers Group, Lithium-Ion

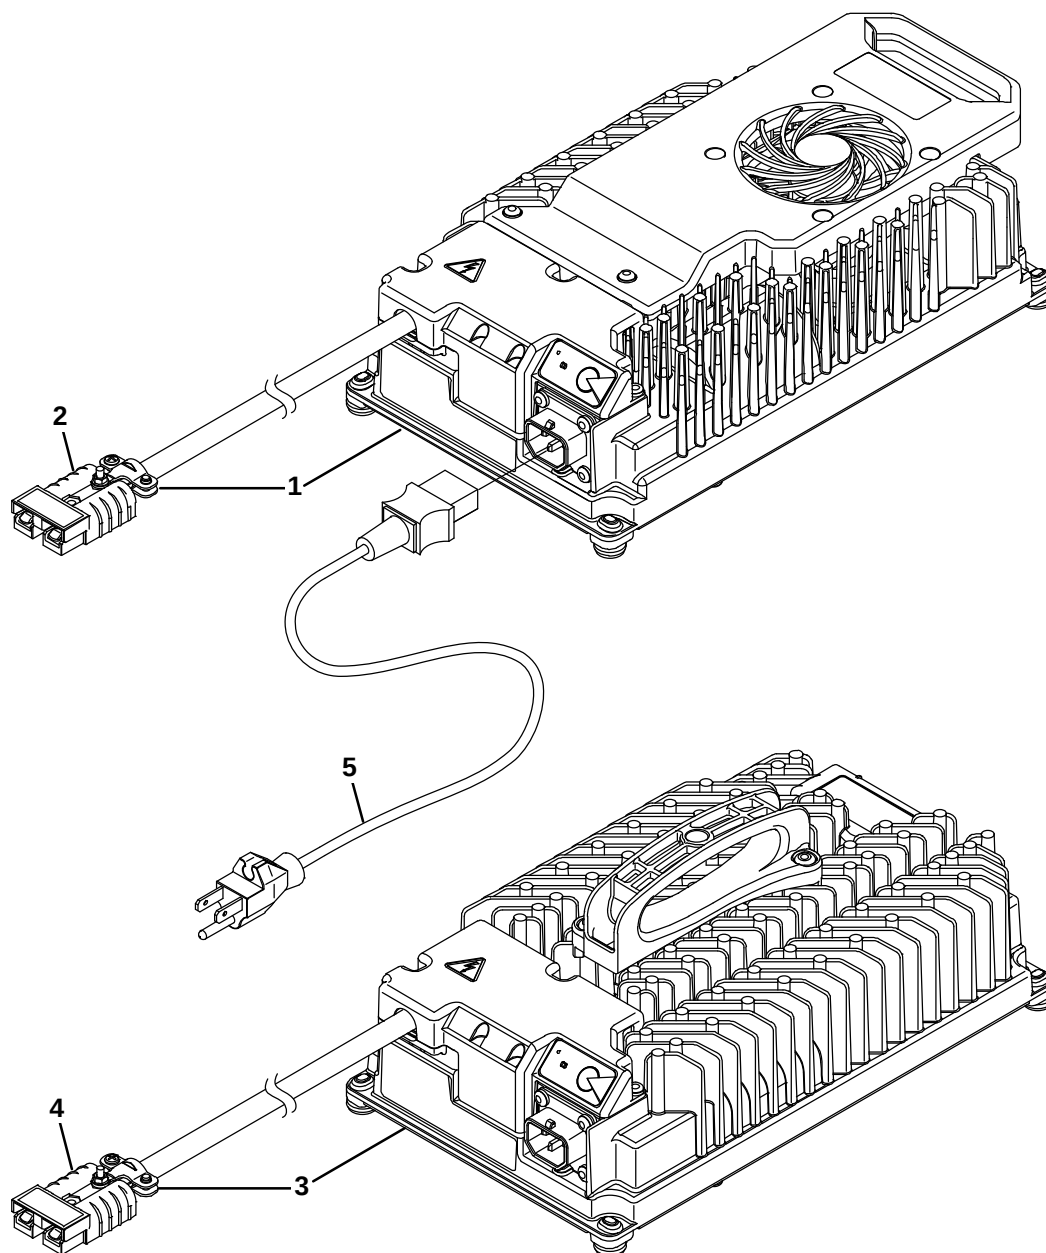

356962

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1242861	(10967791-19999999)	Charger, 36vdc 1200w 100-240vac[Off Brd]	1
▲	2	130155	(10967791-19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1
▽	3	1242864	(10967791-19999999)	Charger, 36vdc 900w 100-240vac [Off Brd]	1
▲	4	130155	(10967791-19999999)	Connector, Battery, 6ga 50a, Gray[2cont]	1
	5	1025642	(10967791-19999999)	Cord, Power, 16/3, 15ft Blk [Us]	1

Fig. 33 – On-Board Charger Kit

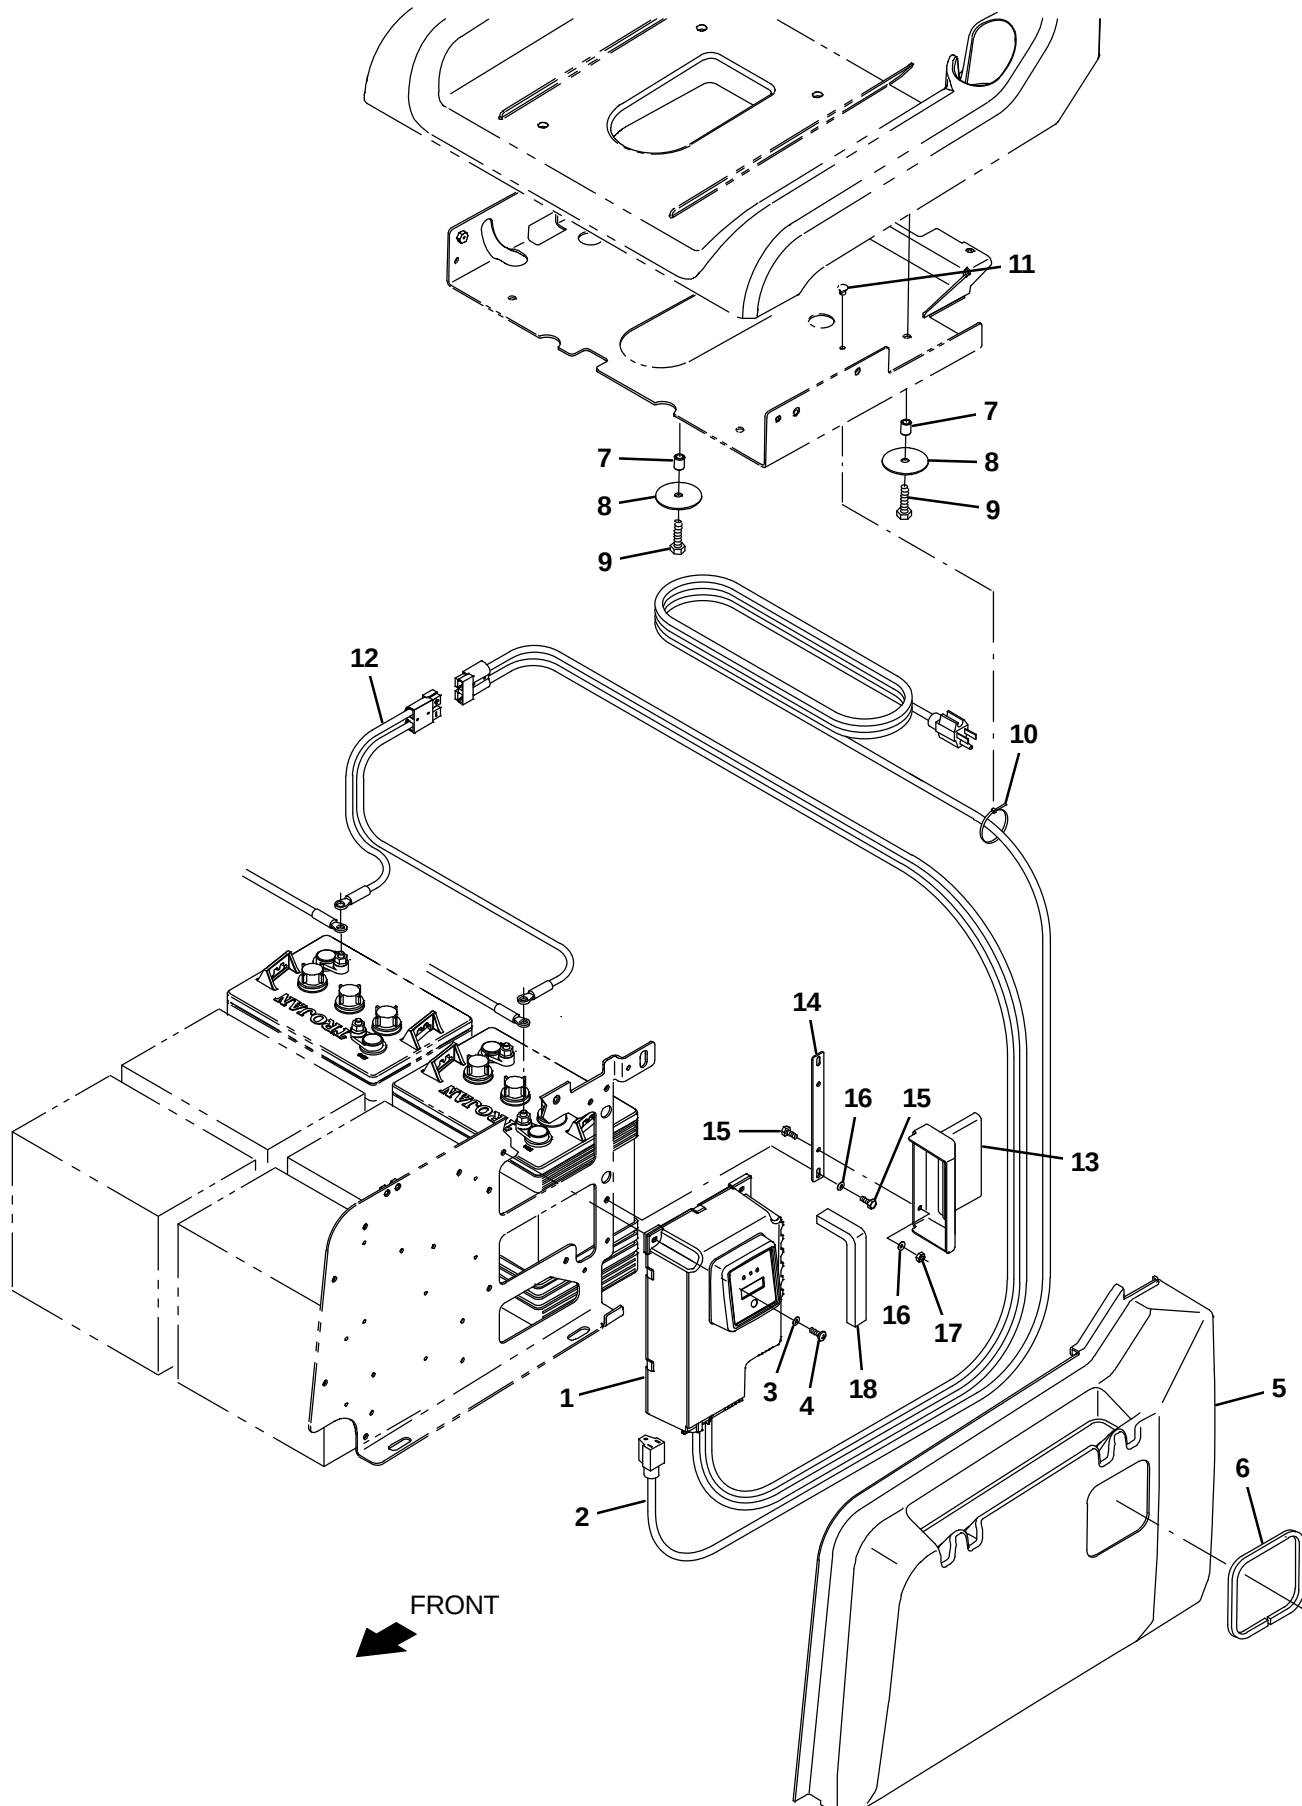


Fig. 33 – On-Board Charger Kit

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009866	(10000000-19999999)	Charger Kit, On-Board, Us Ci [T12]	1
▲▽	1	9022393	(10000000-19999999)	Charger, Kit, Programmable [T12/T16]	1
▲▲		1030692	(10000000-19999999)	Fuse, 15a, Replmt	1
▲	2	1073882	(10000000-19999999)	Cord, Power, 14/3, 15A, 15ft Blk [Us]	1
▲	3	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	3
▲	4	06933	(10000000-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, 4.8	3
▲	5	1201501	(10000000-19999999)	Cover, Access, Chrgr, Trimmed	1
▲	6	1020170	(10000000-19999999)	Molding, Afmkt, Trim, Pvc, .08 .11, 02ft	1
▲	7	80395	(10000000-19999999)	Sleeve, P/M, 0.32b 0.50d 0.7l [430ss]	2
▲	8	373117	(10000000-19999999)	Washer, Flat, 0.38b 2.25d .07, Stil, Pnt	2
▲	9	09011	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	2
▲	10	763115	(10000000-19999999)	Tie, Cable, 6.0l, 1.25d Max	1
▲	11	1202868	(10000000-19999999)	Clip, Tie, 0.25d, Plstc	1
▲	12	1070508	(10000000-19999999)	Cable Assy, 6ga [6100e – Telemetry]	1
▲	13	1206036	(10000000-19999999)	Duct, Outlet, Heat	1
▲	14	1206052	(10000000-19999999)	Plate, Mtg, Heat Duct	1
▲	15	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	4
▲	16	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	4
▲	17	09739	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
▲	18	1206096	(10000000-19999999)	Seal, Foam, 0.50 0.75w 8.0l, Pvc, Adh	1

Fig. 34 – On-Board Charger Group, International

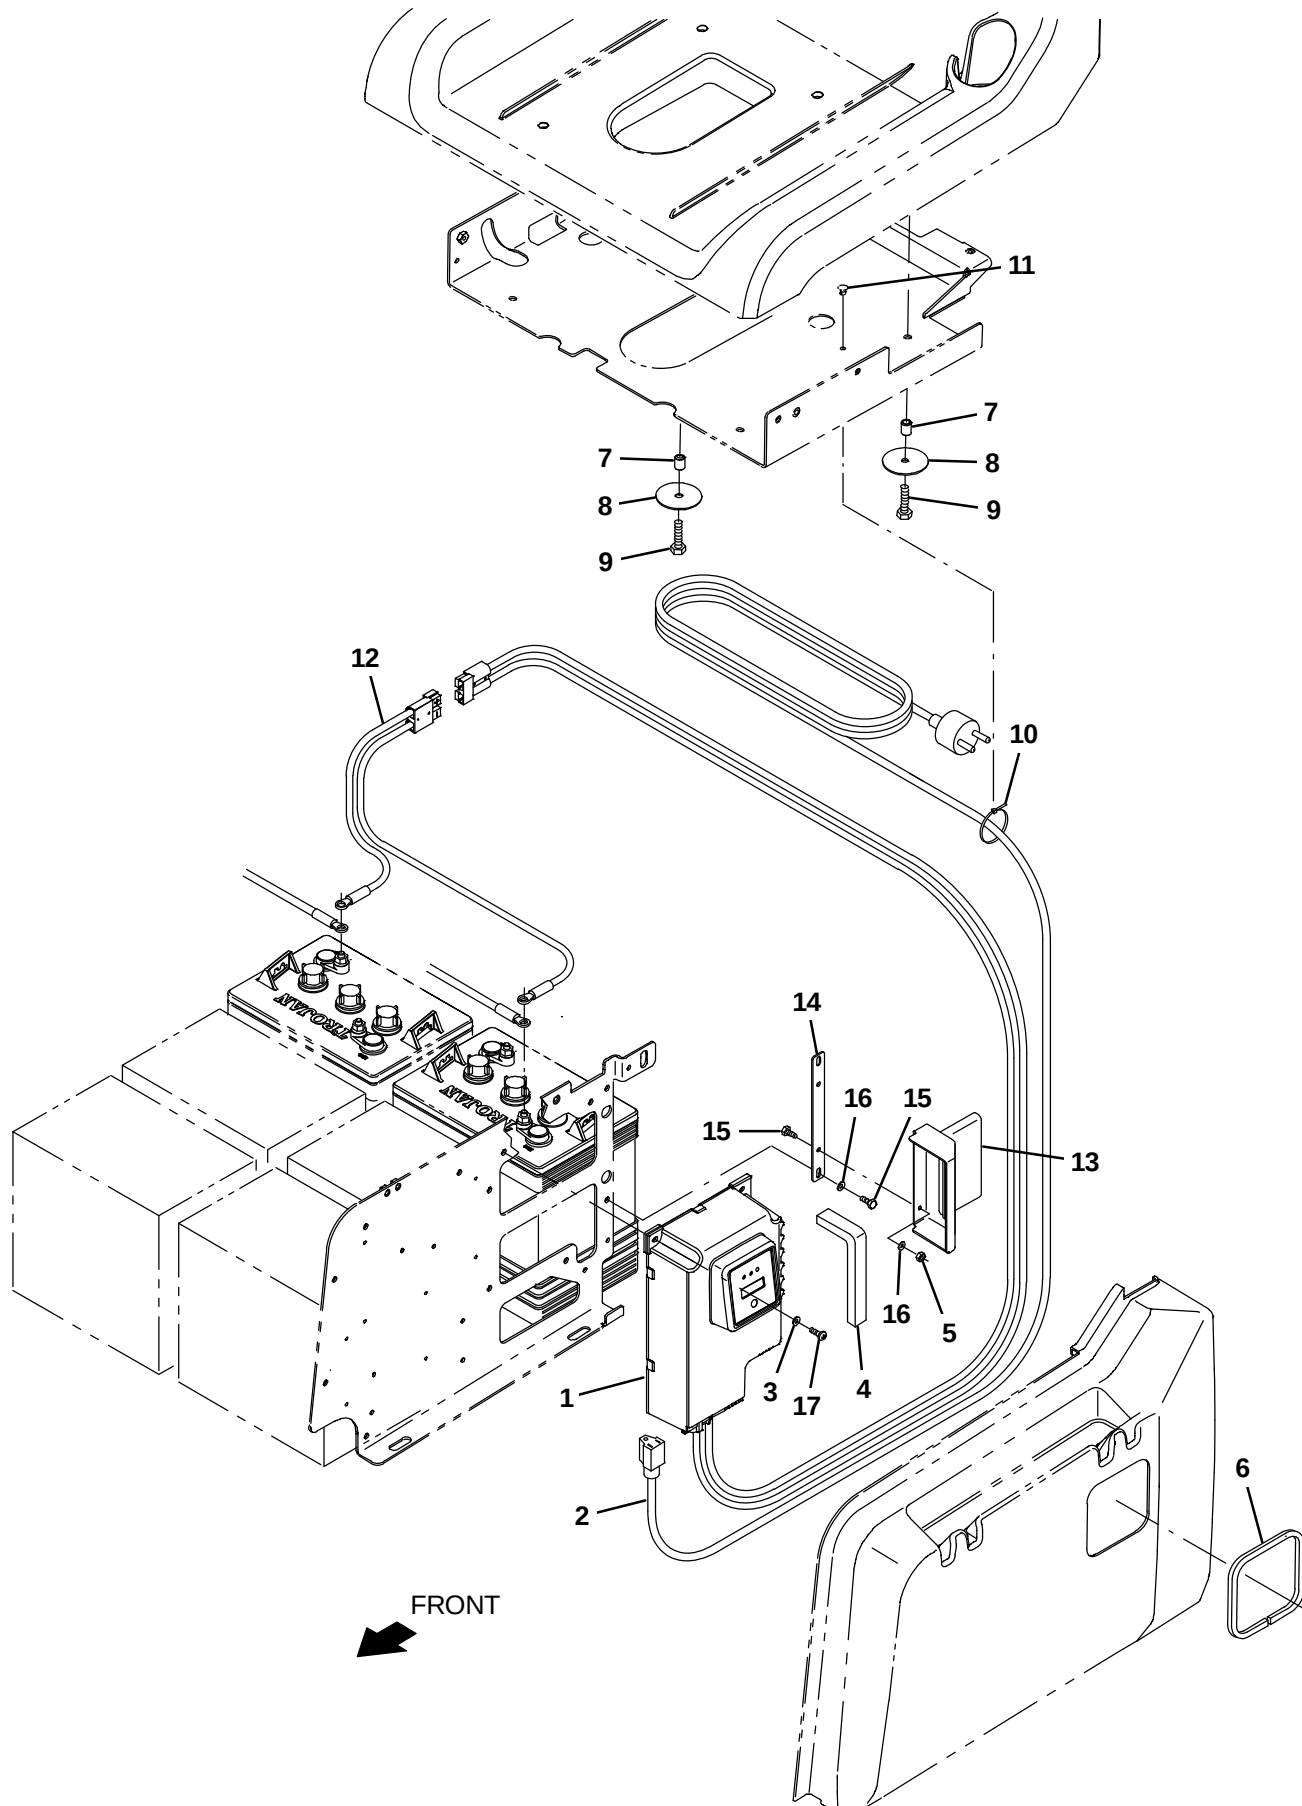


Fig. 34 – On-Board Charger Group, International

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9022393	(10000000-19999999)	Charger, Kit, Programmable [T12/T16]	1
▲		1030692	(10000000-19999999)	Fuse, 15a, Replmt	1
	2	1019242	(10000000-19999999)	Cord, Chrgr, Ele [European]	1
	2	1026325	(10000000-19999999)	Cord, Power, 1.0mm2/3 Blk[2.5Meter, Australia]	1
	3	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	3
	4	1206096	(10000000-19999999)	Seal, Foam, 0.50 0.75w 8.0l, Pvc, Adh	1
	5	09739	(10000000-19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
	6	1020170	(10000000-19999999)	Molding, Afmkt, Trim, Pvc, .08 .11, 02ft	1
	7	80395	(10000000-19999999)	Sleeve, P/M, 0.32b 0.50d 0.7l [430ss]	2
	8	373117	(10000000-19999999)	Washer, Flat, 0.38b 2.25d .07, Stl, Pnt	2
	9	09011	(10000000-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	2
	10	763115	(10000000-19999999)	Tie, Cable, 6.0l, 1.25d Max	1
	11	1202868	(10000000-19999999)	Clip, Tie, 0.25d, Plstc	1
	12	1070508	(10000000-19999999)	Cable Assy, 6ga [6100e – Telemetry]	1
	13	1206036	(10000000-19999999)	Duct, Outlet, Heat	1
	14	1206052	(10000000-19999999)	Plate, Mtg, Heat Duct	1
	15	09738	(10000000-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	4
	16	140011	(10000000-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	4
	17	06933	(10000000-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, 4.8	3

Fig. 35 – On-Board Battery Charger Group, Lithium-Ion


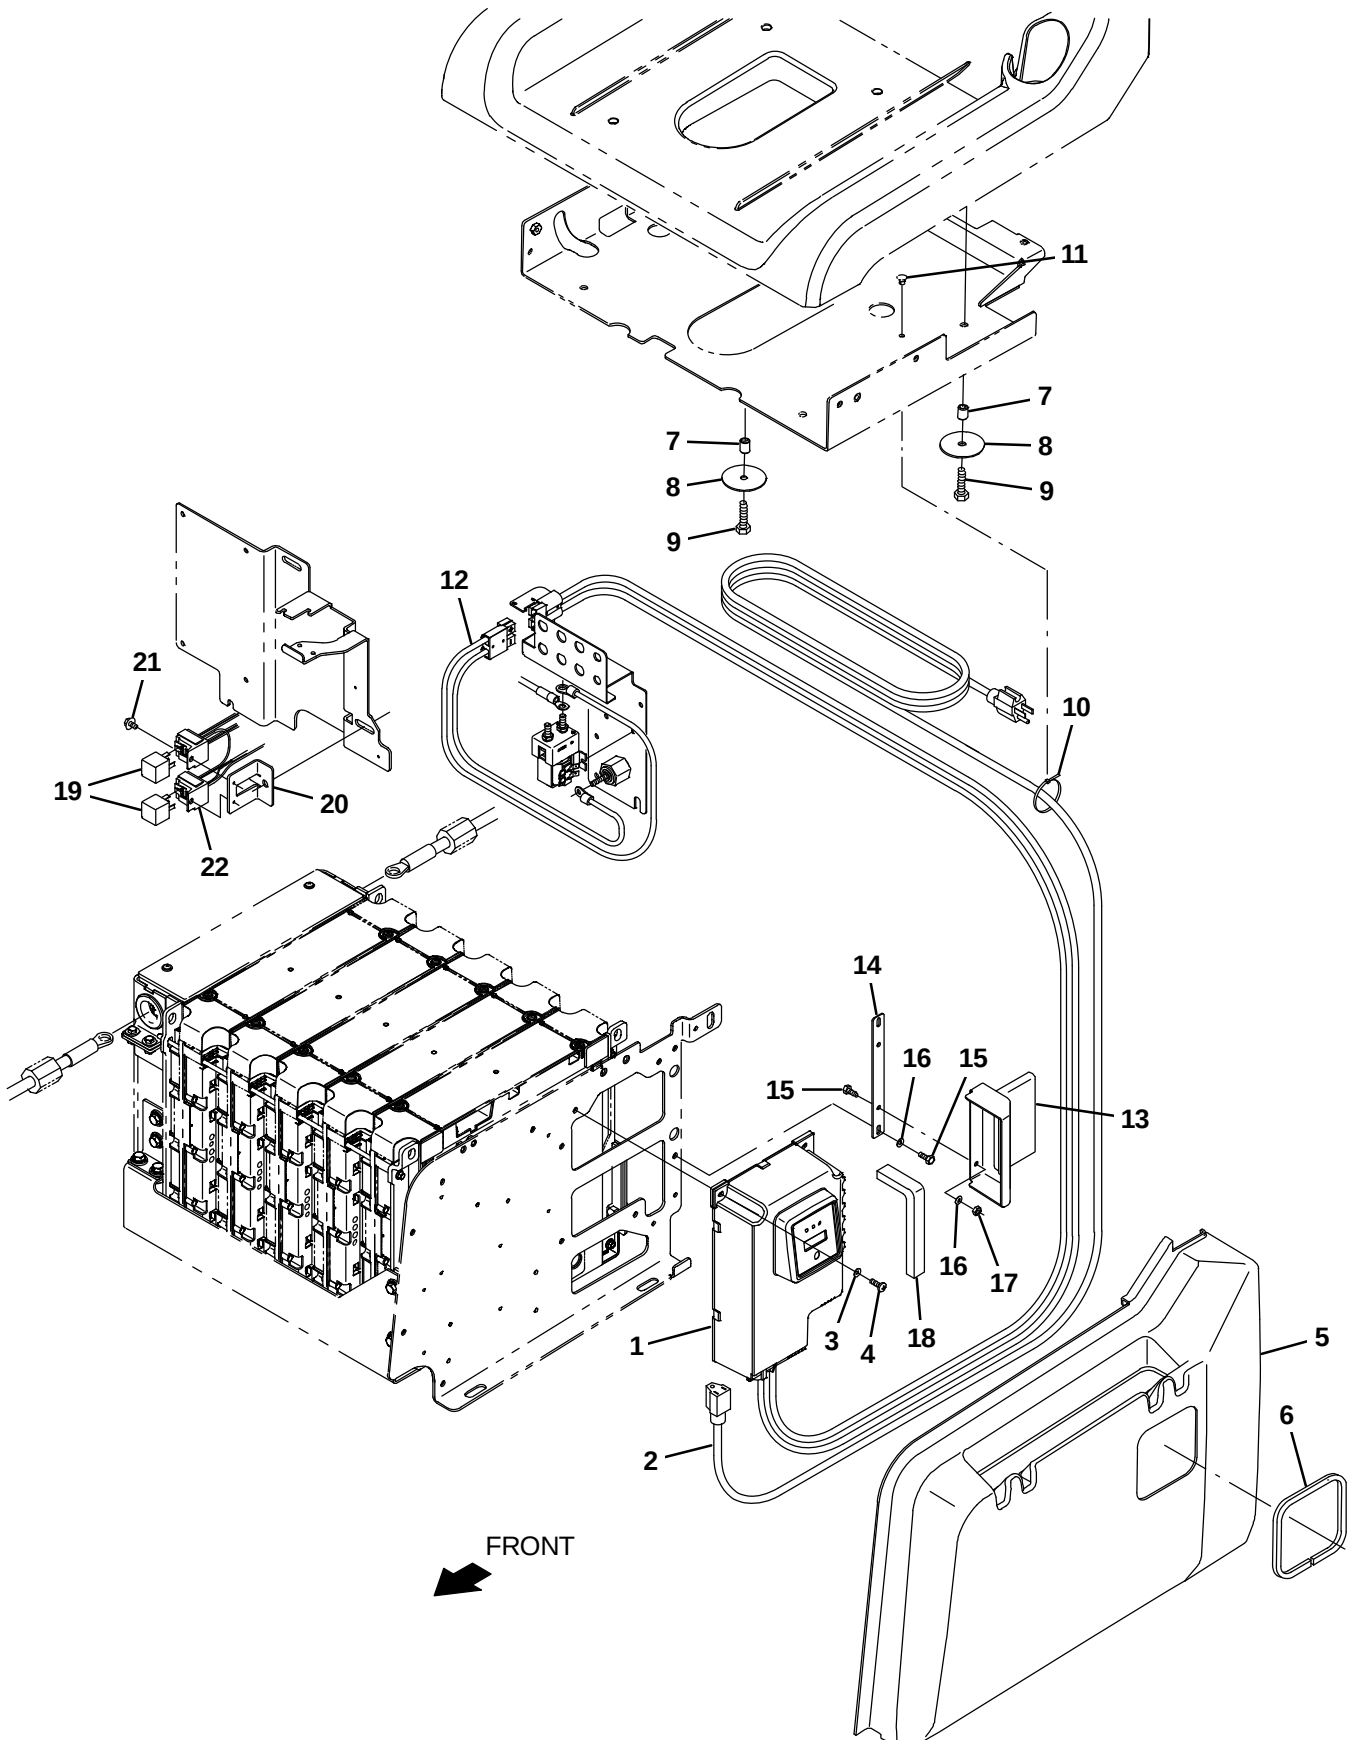


Fig. 35 – On-Board Battery Charger Group, Lithium-Ion

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009866	(10967791-19999999)	Charger Kit, On-Board, Us Ci [T12]	1
▲▽	1	9022393	(10967791-19999999)	Charger, Kit, Programmable [T12/T16]	1
▲▲		1030692	(10967791-19999999)	Fuse, 15a, Replmt	1
▲	2	1073882	(10967791-19999999)	Cord, Power, 14/3, 15A, 15ft Blk [Us]	1
▲	3	140011	(10967791-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	3
▲	4	06933	(10967791-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, 4.8	3
▲	5	1201501	(10967791-19999999)	Cover, Access, Chrgr, Trimmed	1
▲	6	1020170	(10967791-19999999)	Molding, Afmkt, Trim, Pvc, .08 .11, 02ft	1
▲	7	80395	(10967791-19999999)	Sleeve, P/M, 0.32b 0.50d 0.7l [430ss]	2
▲	8	373117	(10967791-19999999)	Washer, Flat, 0.38b 2.25d .07, Stil, Pnt	2
▲	9	09011	(10967791-19999999)	Screw, Hex, M8 X 1.25 X 30, Ss	2
▲	10	763115	(10967791-19999999)	Tie, Cable, 6.0l, 1.25d Max	1
▲	11	1202868	(10967791-19999999)	Clip, Tie, 0.25d, Plstc	1
▲	12	1070508	(10967791-19999999)	Cable Assy, 6ga [6100e – Telemetry]	1
▲	13	1206990	(10967791-19999999)	Duct, Outlet, Heat	1
▲	14	1206052	(10967791-19999999)	Plate, Mtg, Heat Duct	1
▲	15	09738	(10967791-19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	4
▲	16	140011	(10967791-19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	4
▲	17	09739	(10967791-19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
▲	18	1206096	(10967791-19999999)	Seal, Foam, 0.50 0.75w 8.0l, Pvc, Adh	1
	19	398526	(10967791-19999999)	Relay, 36vdc, 005a, Spdt No [Greenwich]	2
	20	1246896	(10967791-19999999)	Bracket, Mtg, Relay	1
	21	223198	(10967791-19999999)	Screw, Hex, M5 X 0.80 X 10, Fmg	2
	22	1244766	(10967791-19999999)	Harness, Cntrl, Battery [On-B T12 T16]	1

Fig. 36 – Flow-Rite™ Battery Water Manifold Kit

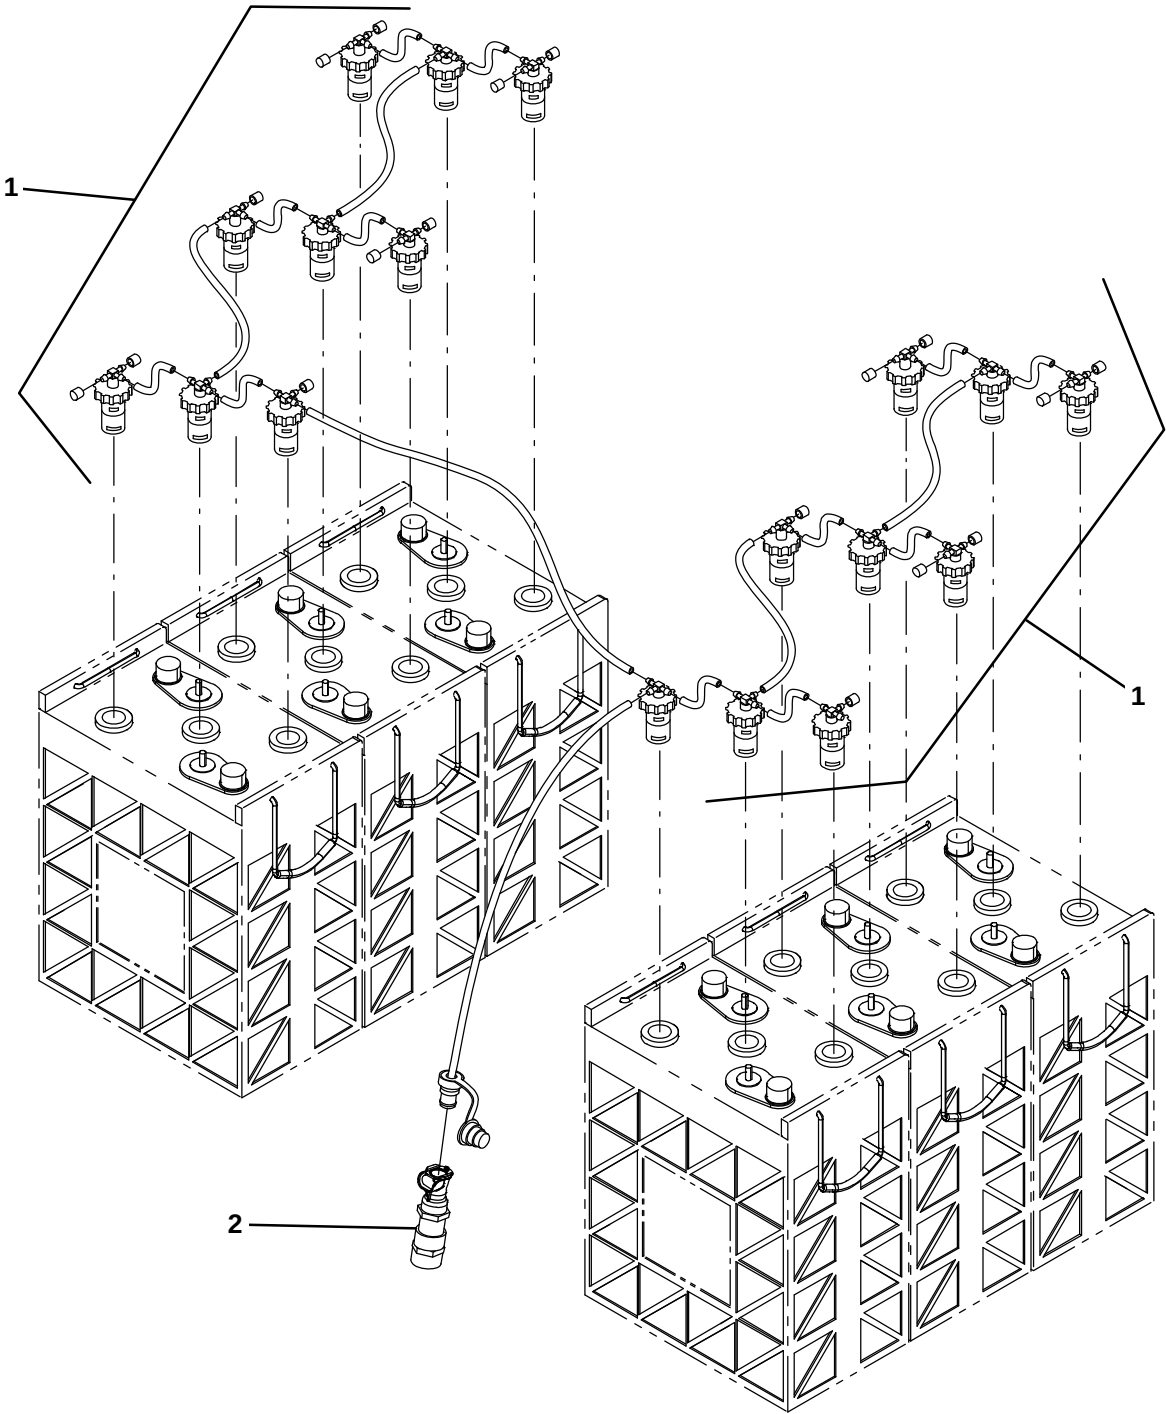


356352

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9009870	(10000000–19999999)	Manifold Kit, Sys, Water, Battery, Di (Replaced by 9045074)	1
▲	1	1060756	(10000000–19999999)	Manifold, Sys, Water, Battery	1
▲	2	1061926	(10000000–19999999)	Valve, Reg, Water	1

Flow-Rite is a registered trademark of Flow-Rite Controls

Fig. 37 – Hydrolink® Battery Watering System Kit

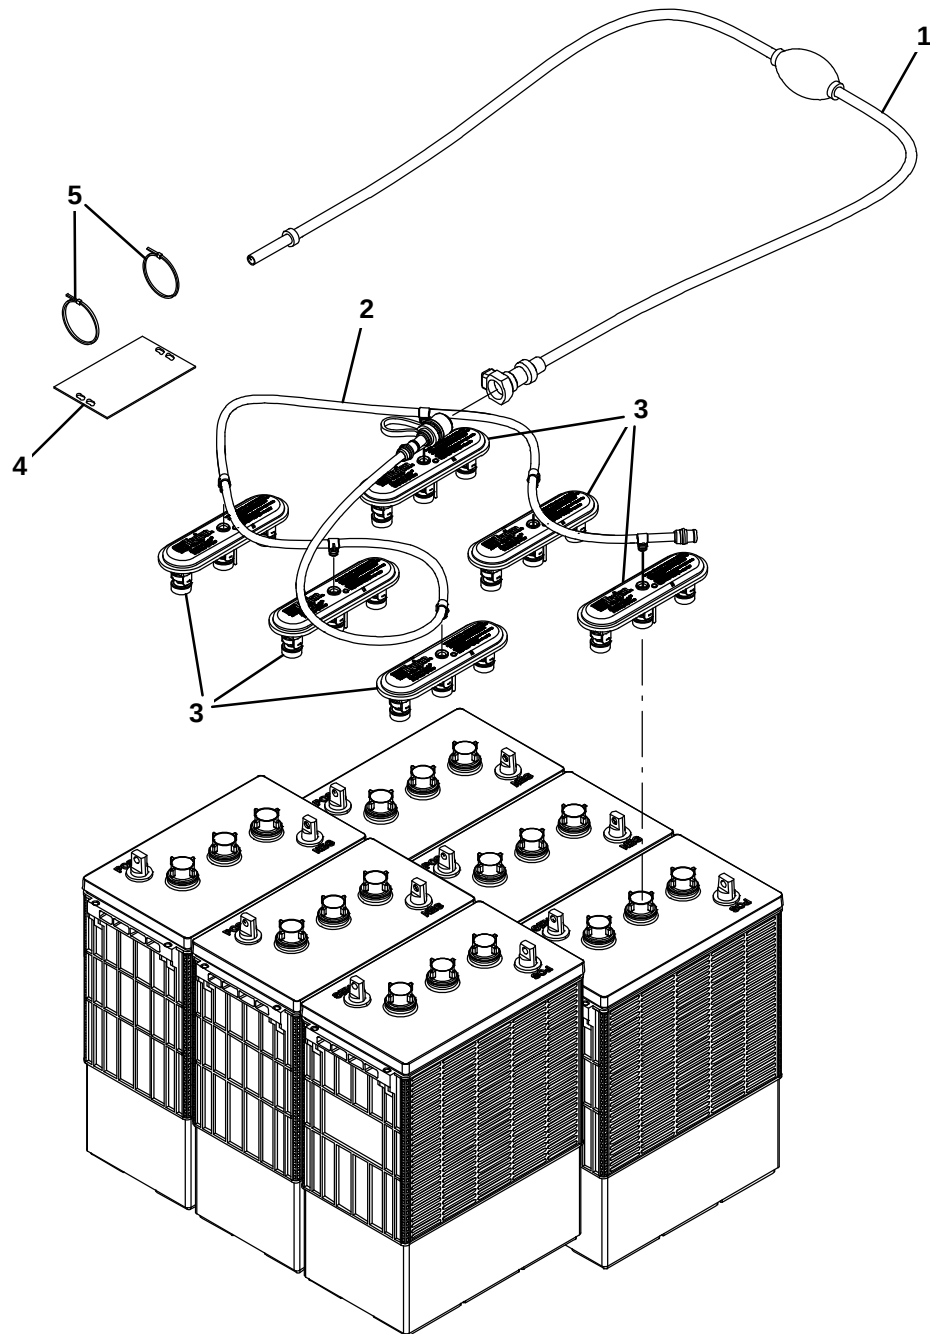


355205

Ref.	Part No.	Serial Number	Description	Qty.
▽	9010301*	(10000000–19999999)	Pump Kit, Fill, Battery, 36vdc, Ci[Trojan] (Replaced by 9045074)	1
▲	1 1058939	(10000000–19999999)	Pump Kit, Fill, Battery	1
▲	2 1201997	(10000000–19999999)	Tube, Water, Battery, 36vdc [Trojan]	1
▲	3 1204142	(10000000–19999999)	Cap, Fill, Battery [Trojan]	6
▲	4 1071084	(10000000–19999999)	Label, Tag, Battery [Hydrolink Watering]	1
▲	5 130773	(10000000–19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	2

*This kit is intended for use with Trojan® Lead Acid Batteries Only.

Hydrolink® is a registered trademark of Trojan® Battery Company.

Fig. 38 – Manual Battery Watering System Kit

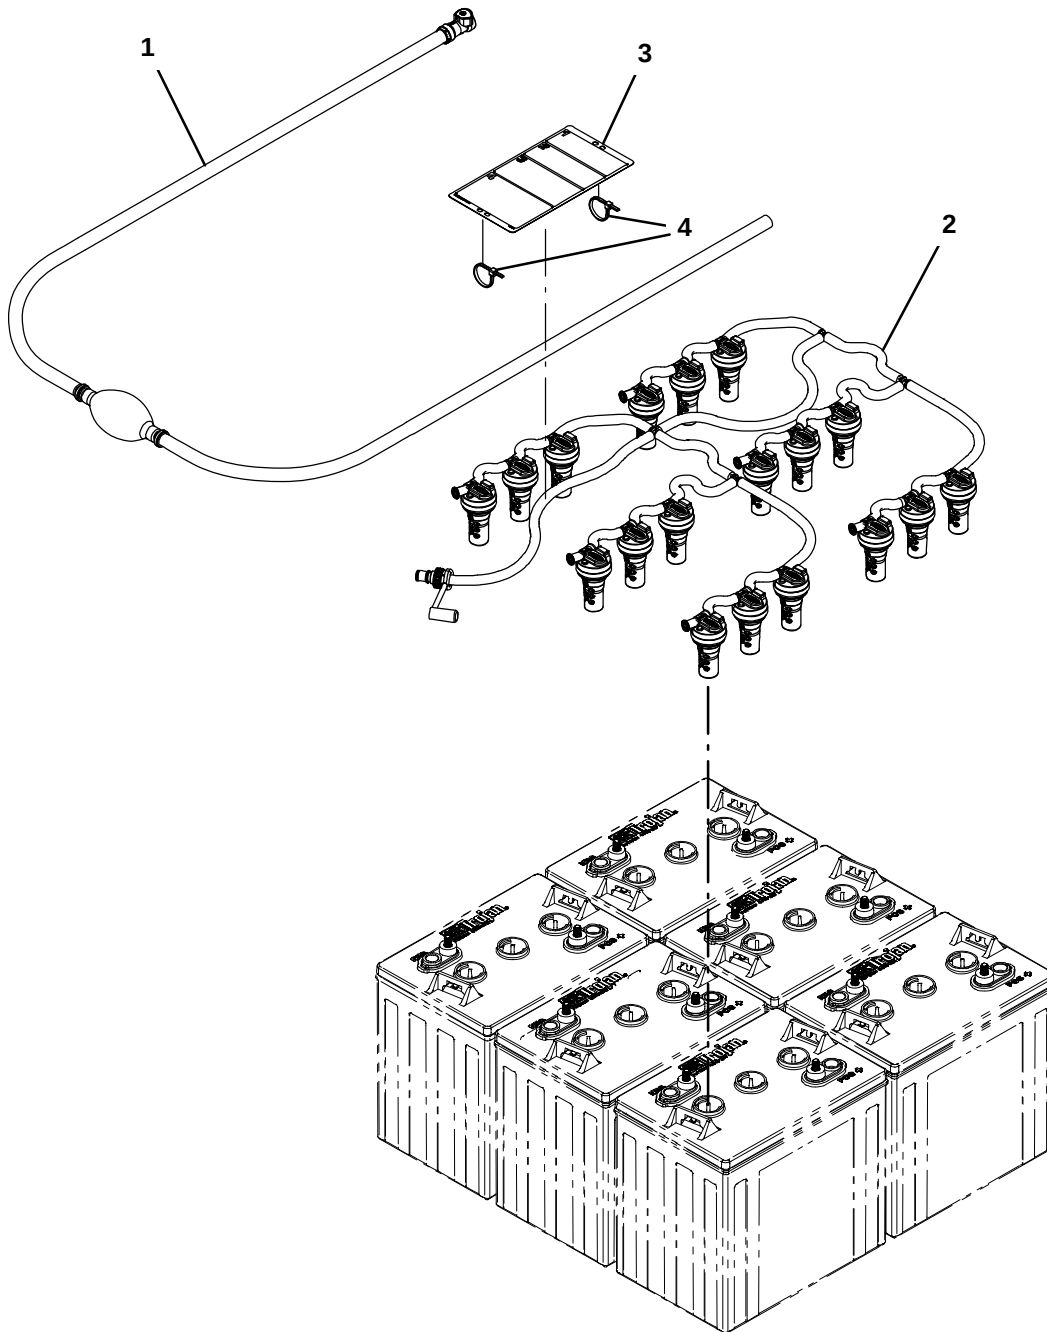


357139

Ref.	Part No.	Serial Number	Description	Qty.
▽	9045074*	(10000000–19999999)	Fill Kit, 6 Btry, Mnl, Ci [Trojan]	1
▲ 1	1236295	(10000000–19999999)	Pump, Hand, Battery	1
▲ 2	1248178	(10000000–19999999)	Distribution Assy, Water, Battery	1
▲ 3	1253250	(10000000–19999999)	Label, Tag, Battery [Bwt Watering]	1
▲ 4	130773	(10000000–19999999)	Tie, Cable, nyl, 11.0L, .14W, 3.0Max. D	2

*This kit is intended for use with Trojan® Lead Acid Batteries Only.


Fig. 39 – Transport Group

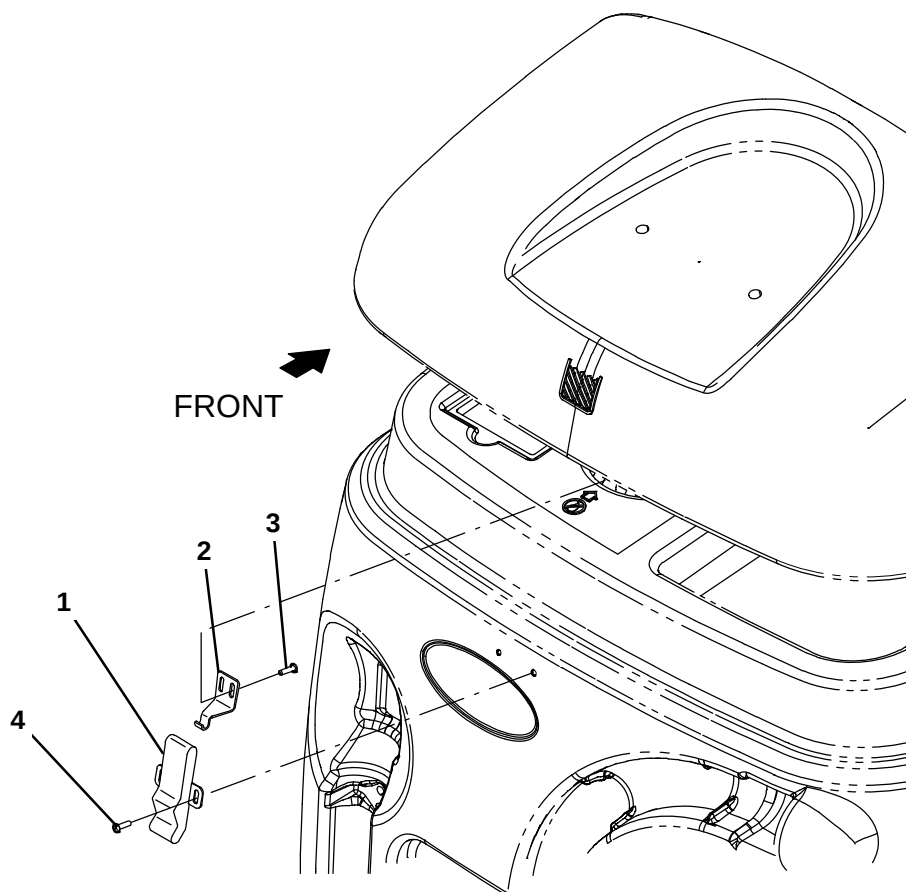

356355

Ref.	Part No.	Serial Number	Description	Qty.
1	140932	(10000000–19999999)	Latch, Draw, Rbr, W/ Keeper, Fr/49800	1
2	1205666	(10000000–19999999)	Bracket, Catch, Latch	1
3	360973	(10000000–19999999)	Screw, Pan, 12–16 X 0.50, F/ Plstc	2
4	140825	(10000000–19999999)	Screw, Pan, Phl, 06 X 0.50, Fmg/Ab, Blk	2

Fig. 40 – Fire Extinguisher Group

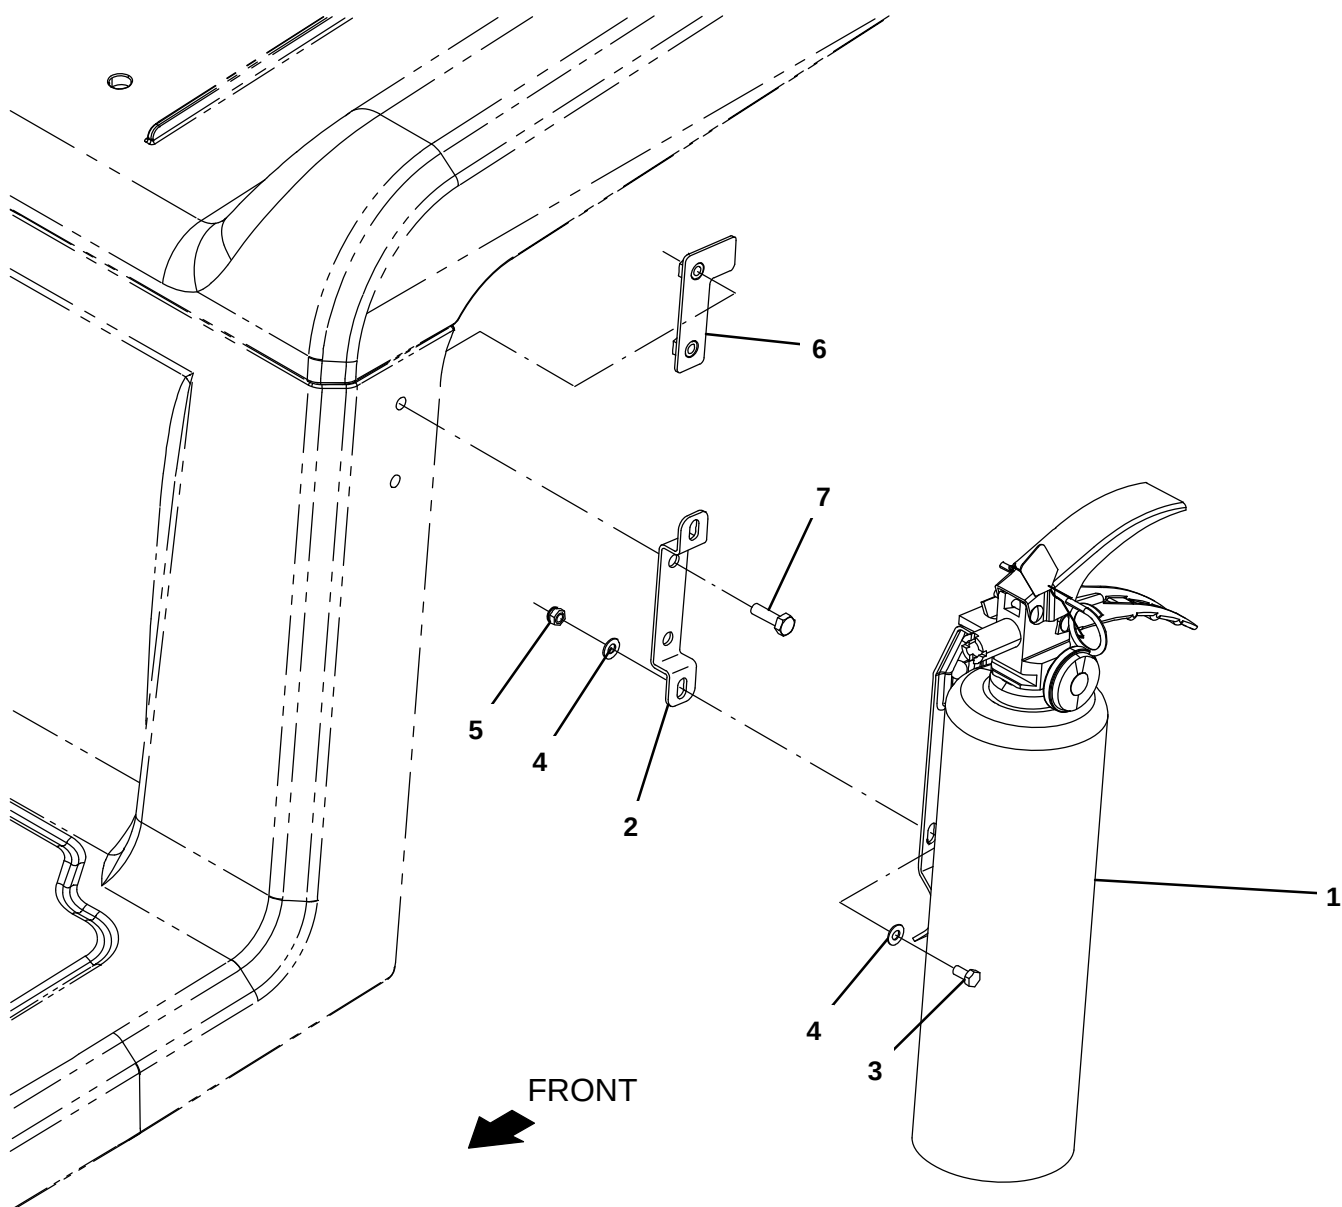

356351

Ref.	Part No.	Serial Number	Description	Qty.
1	25312	(10000000–19999999)	Extinguisher, Fire, 2.5 Lb Dry	1
2	1205877	(10000000–19999999)	Bracket, Mtg, Extinguisher	1
3	09738	(10000000–19999999)	Screw, Hex, M5 X 0.80 X 12, Ss	2
4	140011	(10000000–19999999)	Washer, Flat, 0.21b 0.45d .03, Ss	4
5	09739	(10000000–19999999)	Nut, Hex, Lock, M5 X 0.80, NI, Ss	2
6	1205889	(10000000–19999999)	Plate Wldt, Mtg, Extinguisher	1
7	08716	(10000000–19999999)	Screw, Hex, M6 X 1.00 X 20, Ss	2

Fig. 41 - Documentation Group (Available Online Only)

Ref.	Part No.	Serial Number	Description	Qty.
	9009910	(10000000- 19999999)	Manual, Oprtr [T12 Ele, En, Na]	1
	9009911	(10000000- 19999999)	Manual, Oprtr [T12 Ele, Es, Na]	1
	9009912	(10000000- 19999999)	Manual, Oprtr [T12 Ele, Fr, Na]	1
	9009913	(10000000- 19999999)	Manual, Oprtr [T12 Ele, Ptb]	1
	9009914	(10000000- 19999999)	Manual, Oprtr [T12 Ele, Jp]	1
	9009915	(10000000- 19999999)	Manual, Oprtr [T12 Ele, Cn]	1
	9009916	(10000000- 19999999)	Manual, Parts [T12 Ele, En, Na/Int] (S/N 1000000- 1999999)	1
	9012729	(30000000- 39999999)	Manual, Parts [T12 Ele, EN] (S/N 3000000- 3999999)	1
	9009917	(10000000- 19999999)	Manual, Service Info [T12 Ele, En]	1
	9009890	(10000000- 19999999)	Dvd, Operator [T12]	1
	9011140	(10000000- 19999999)	Instr, Use&Care, Wallchart [T12]	1



To view, print, order, download the latest Parts manual, other language Operator manuals, and Use and Care Guides (wall charts) visit:

www. Tennantco.com/manual

SECTION 4

Contents	Page
Fig. 1 – ec-H2O Module Assembly Breakdown, 9010933	4-2
Fig. 2 – Steering Control Breakdown, 1200203 ..	4-4
Fig. 3 – Steering Control Breakdown, 1256309 ..	4-5
Fig. 4 – Drive Wheel Breakdown, 1246662	4-6
Fig. 5 – Drive Wheel Breakdown, 1255933	4-7
Fig. 6 – Electric Motor Breakdown, 1053342	4-8
Fig. 7 – Accelerator and Brake Pedal Assembly Breakdown, 1200253	4-9

Fig. 1 – ec-H2O Module Assembly Breakdown, 9010933


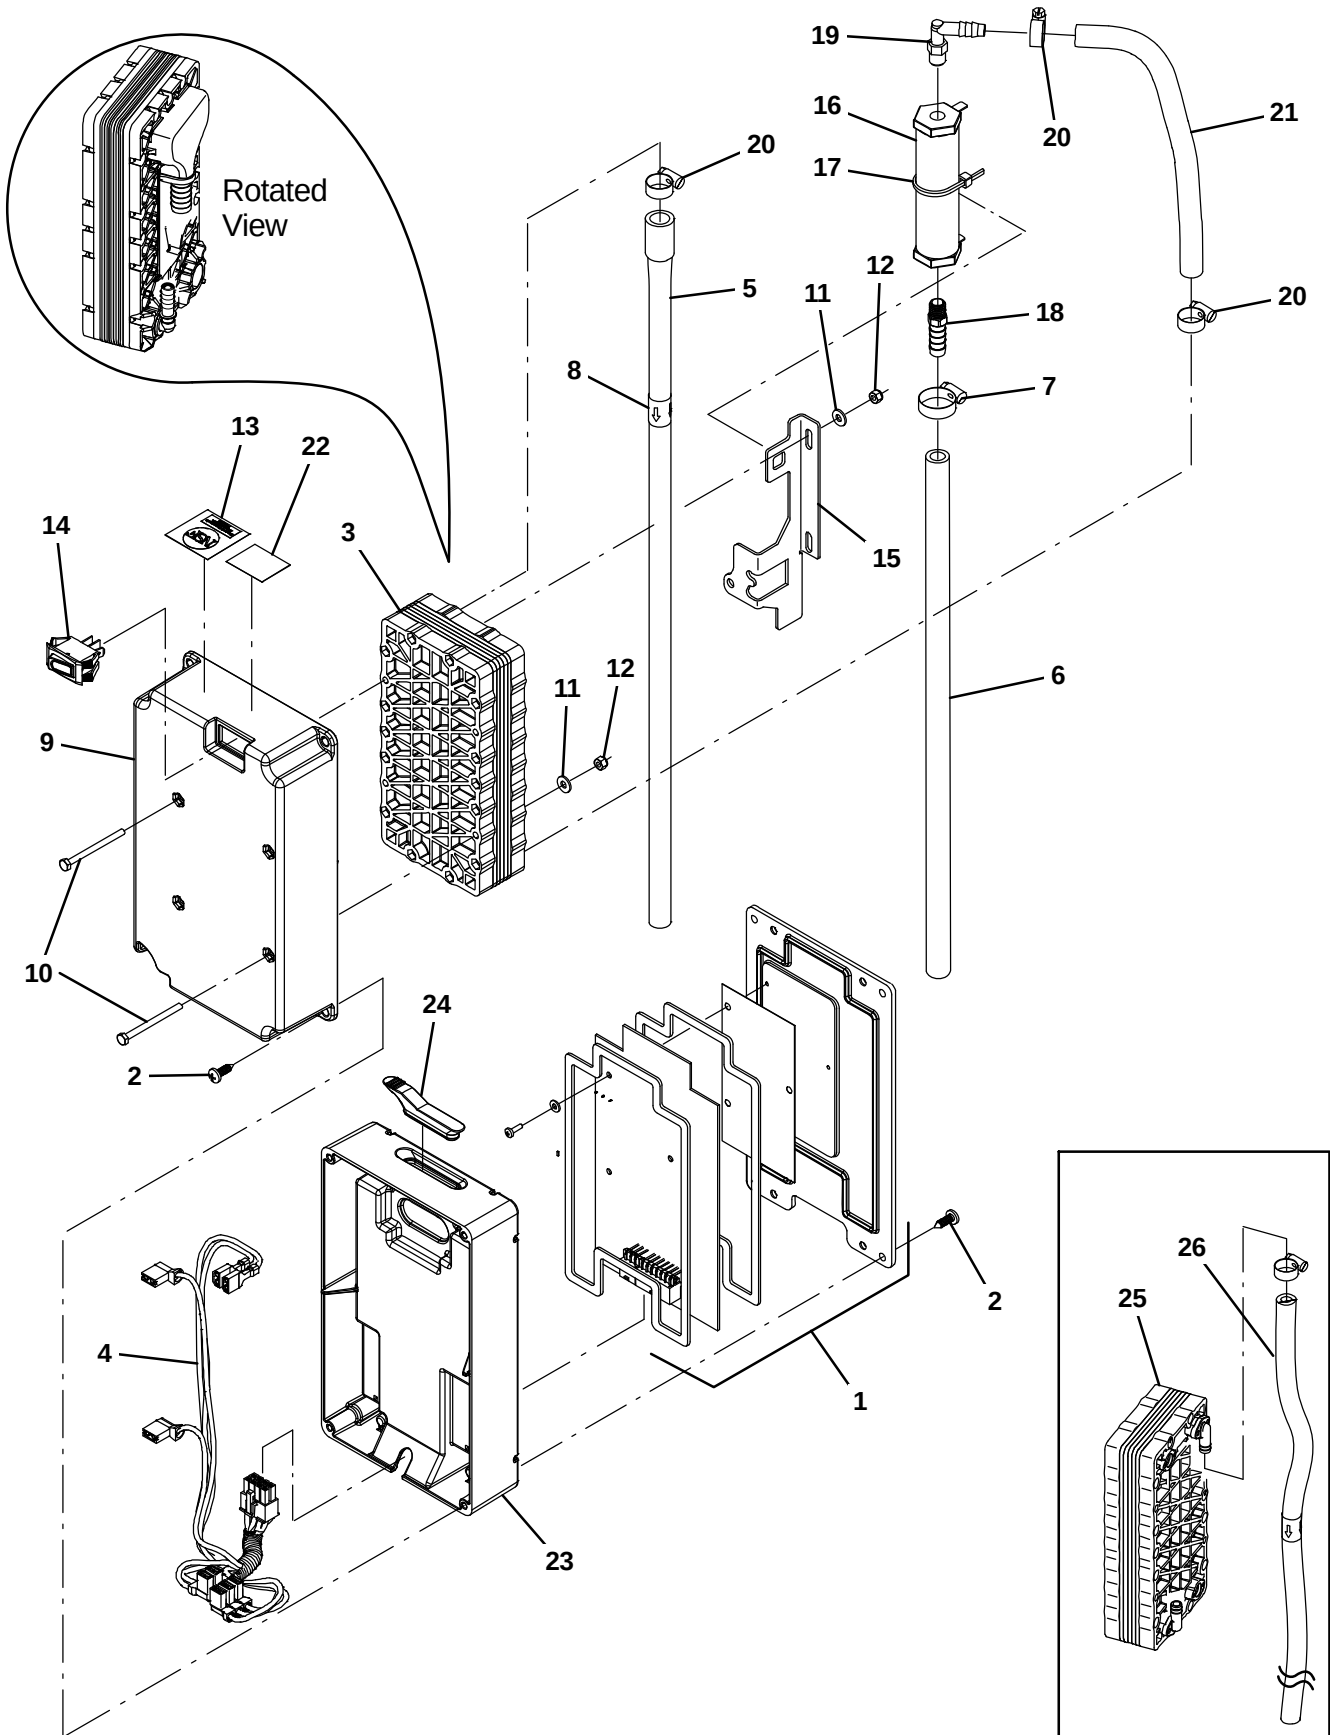


Fig. 1 – ec-H2O Module Assembly Breakdown, 9010933

	Ref.	Part No.	Serial Number	Description	Qty.
▽		9010933	(10000000-19999999)	Ec-H2o Module Kit, Afmkt [T12]	1
▲	1	9020262	(10000000-19999999)	Circuit Board Kit, Ec-H2o, Afmkt [T12]	1
▲	2	1018155	(10000000-19999999)	Screw, Pan, Phl, M5 X 0.80 X 16, Tcut,Ss	8
▲	3	1233516	(10994329-19999999)	Electrode, 5 Plate, [De Nora Tech]	1
▲	4	1069708	(10000000-19999999)	Harness, Ele, Ech2o [T12 Module]	1
▲	5	1243570	(10994329-19999999)	Hose , Molded, Bm08/Bm05	1
▲	6	1014971	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 01Ft, Clr	1
▲	7	54333	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.31-0.88d, .31w	1
▲	8	1049637	(10000000-19999999)	Label, Direction [Ec-H2o]	1
▲	9	1051519	(10000000-19999999)	Housing, Upper, Module, High Flow	1
▲	10	32509	(10000000-19999999)	Screw, Hex, M4 X 0.70 X 50, Ss	4
▲	11	41579	(10000000-19999999)	Washer, Flat, 08, Ss	4
▲	12	33932	(10000000-19999999)	Nut, Hex, Lock, M4 X 0.70, NI, Ss	4
▲	13	1046041	(10000000-19999999)	Label, Module [Nsf, Ec-H2o]	1
▲	14	1044393	(10000000-19999999)	Switch, Rocker, Spst, Mom	1
▲	15	1048741	(10000000-19999999)	Bracket, Valve, Large	1
▲	16	1062006	(10000000-19999999)	Electrode, Cylindrical	1
▲	17	130773	(10000000-19999999)	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1
▲	18	1055552	(10000000-19999999)	Fitting, Brs, Str, Bm06/Pm02	1
▲	19	1051268	(10000000-19999999)	Fitting, Plstc, E90, Bm05/Pm02, Nyl	1
▲	20	43844	(10000000-19999999)	Clamp, Hose, Wormdrive, 0.25-0.62d, .31w	3
▲	21	1014971	(10000000-19999999)	Hose, Afmkt, Pvc, Brd, 01Ft, Clr	1
▲	22	1068763	(10000000-19999999)	Label, Date Code [Ec-H2o]	1
▲	23	1037032	(10000000-19999999)	Housing, Bottom	1
▲	24	1054776	(10000000-19999999)	Grommet, Blind	1
	25	9018397	(10000000-10994328)	Electrode Kit, 5 Plate, Hi Flow, Replmt	1
	26	9006268	(10000000-10994328)	Hose, Pvc, Brd, 0.38id, 01Ft, Clr	1


Fig. 2 – Steering Control Breakdown, 1200203

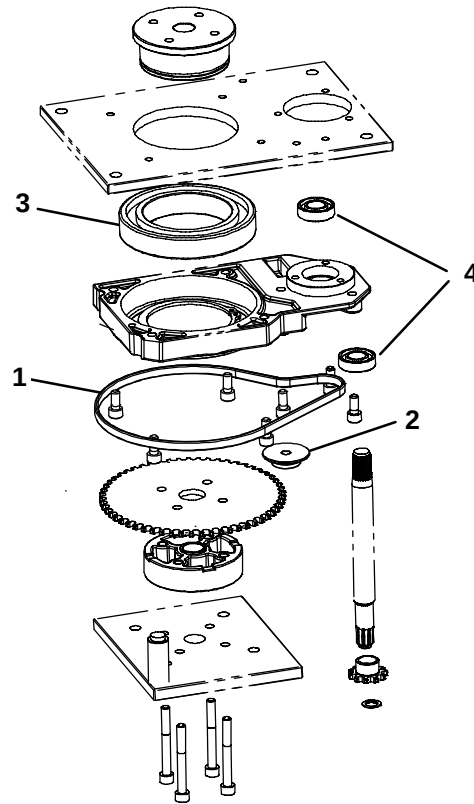

356361

Ref.	Part No.	Serial Number	Description	Qty.
▽	1200203	(10000000-11017501)	Steer-Control Assy, Wheel Drive	1
▲	1	9011049 (10000000-11017501)	Chain, Steering W/Link	1
▲	2	9011051 (10000000-11017501)	Pulley, Tension	1
▲	3	372874 (10000000-11017501)	Bearing, Steering	1
▲	4	9008719 (10000000-11017501)	Bearing [6003 2RS]	2


Fig. 3 – Steering Control Breakdown, 1256309

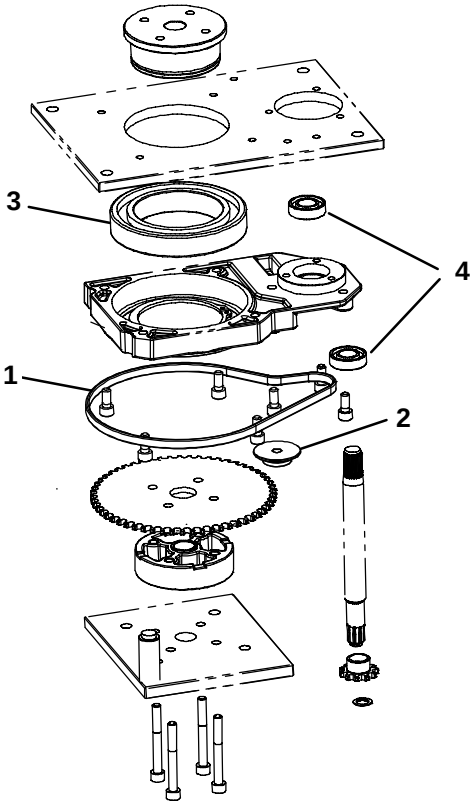

356361

	Ref.	Part No.	Serial Number	Description	Qty.
▽		1256309	(11017502-19999999)	Steer-Control Assy, Wheel Drive	1
▲	1	9011049	(11017502-19999999)	Chain, Steering W/Link	1
▲	2	9011051	(11017502-19999999)	Pulley, Tension	1
▲	3	372874	(11017502-19999999)	Bearing, Steering	1
▲	4	9008719	(11017502-19999999)	Bearing [6003 2RS]	2


Fig. 4 – Drive Wheel Breakdown, 1246662

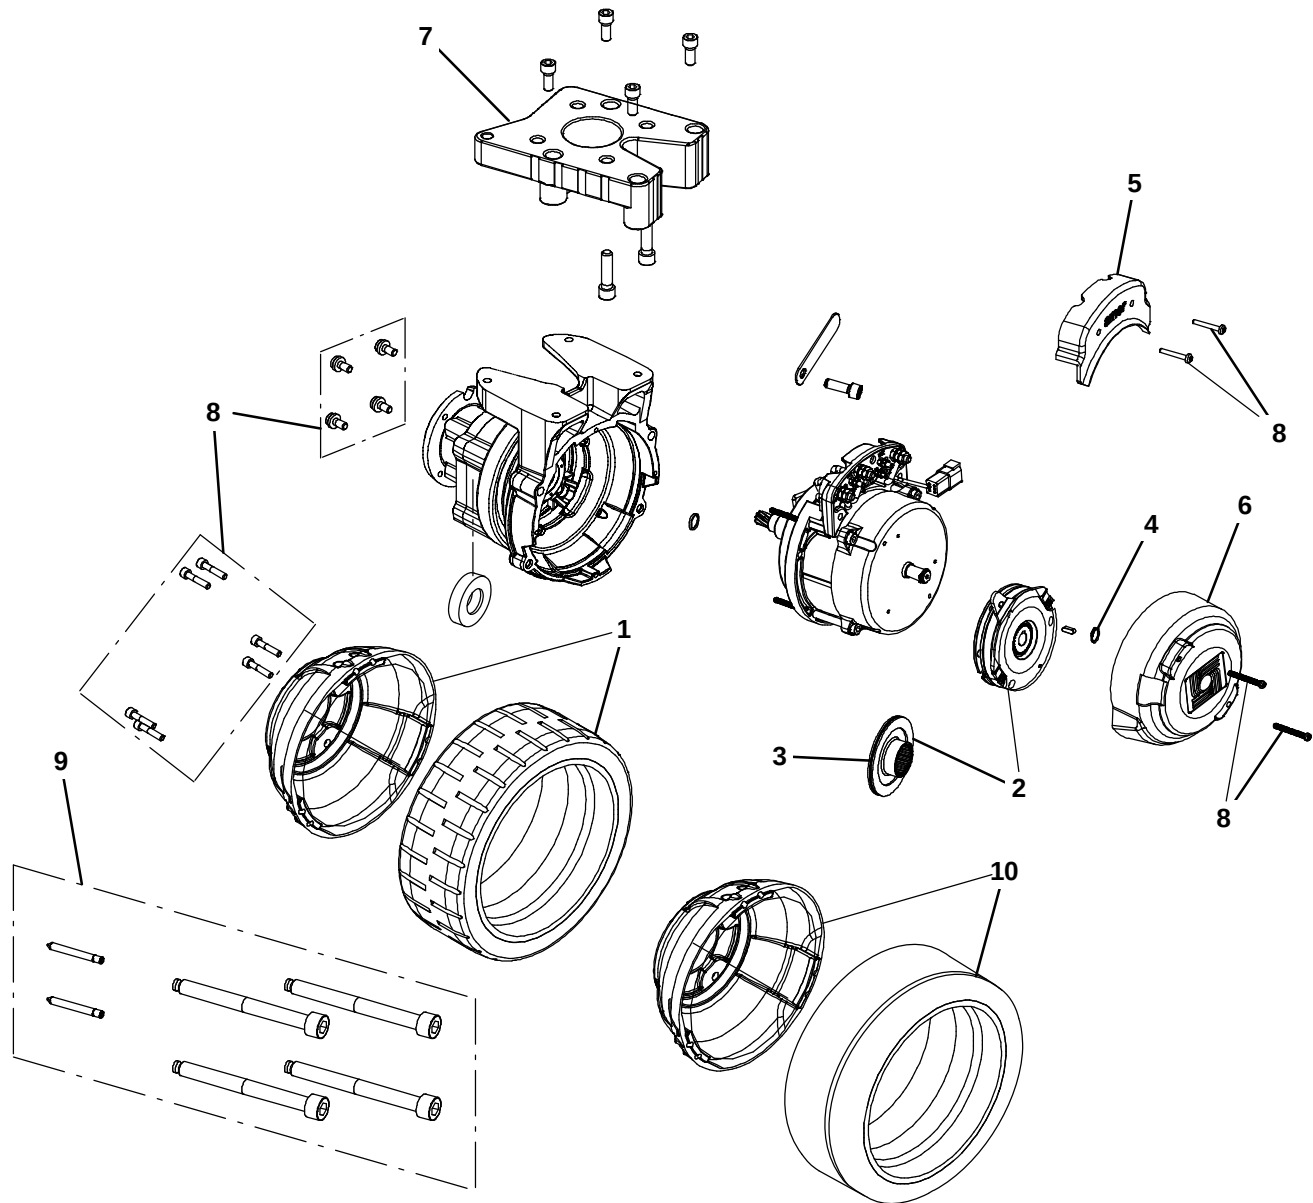

356940

Ref.	Part No.	Serial Number	Description	Qty.
▽	1246662	(10956762-11025471)	Wheel, Drive, Ac	1
▲	1 9020686	(10956762-11025471)	Wheel And Hub Kit, Red [T12]	1
▲▽	2 9020688	(10956762-11025471)	Brake Kit, Complt [T12/T16]	1
▲▲	3 9020689	(10956762-11025471)	Brake Kit, Rotor [T12/T16]	1
▲	4 9008556	(10956762-11025471)	Ring, Retaining F/1055257	1
▲	5 9008550	(10956762-11025471)	Cover, Box, Connector	1
▲	6 9013901	(10956762-11025471)	Cover, Motor, Drive	1
▲	7 9008552	(10956762-11025471)	Spacer, Alm	1
▲	8 9020658	(10956762-11025471)	Screw Kit	1
▲	9 9008544	(10956762-11025471)	Tire Kit, Puller	1
	10 9020685	(10956762-11025471)	Wheel And Hub Kit, Blue [T12]	1


Fig. 5 – Drive Wheel Breakdown, 1255933

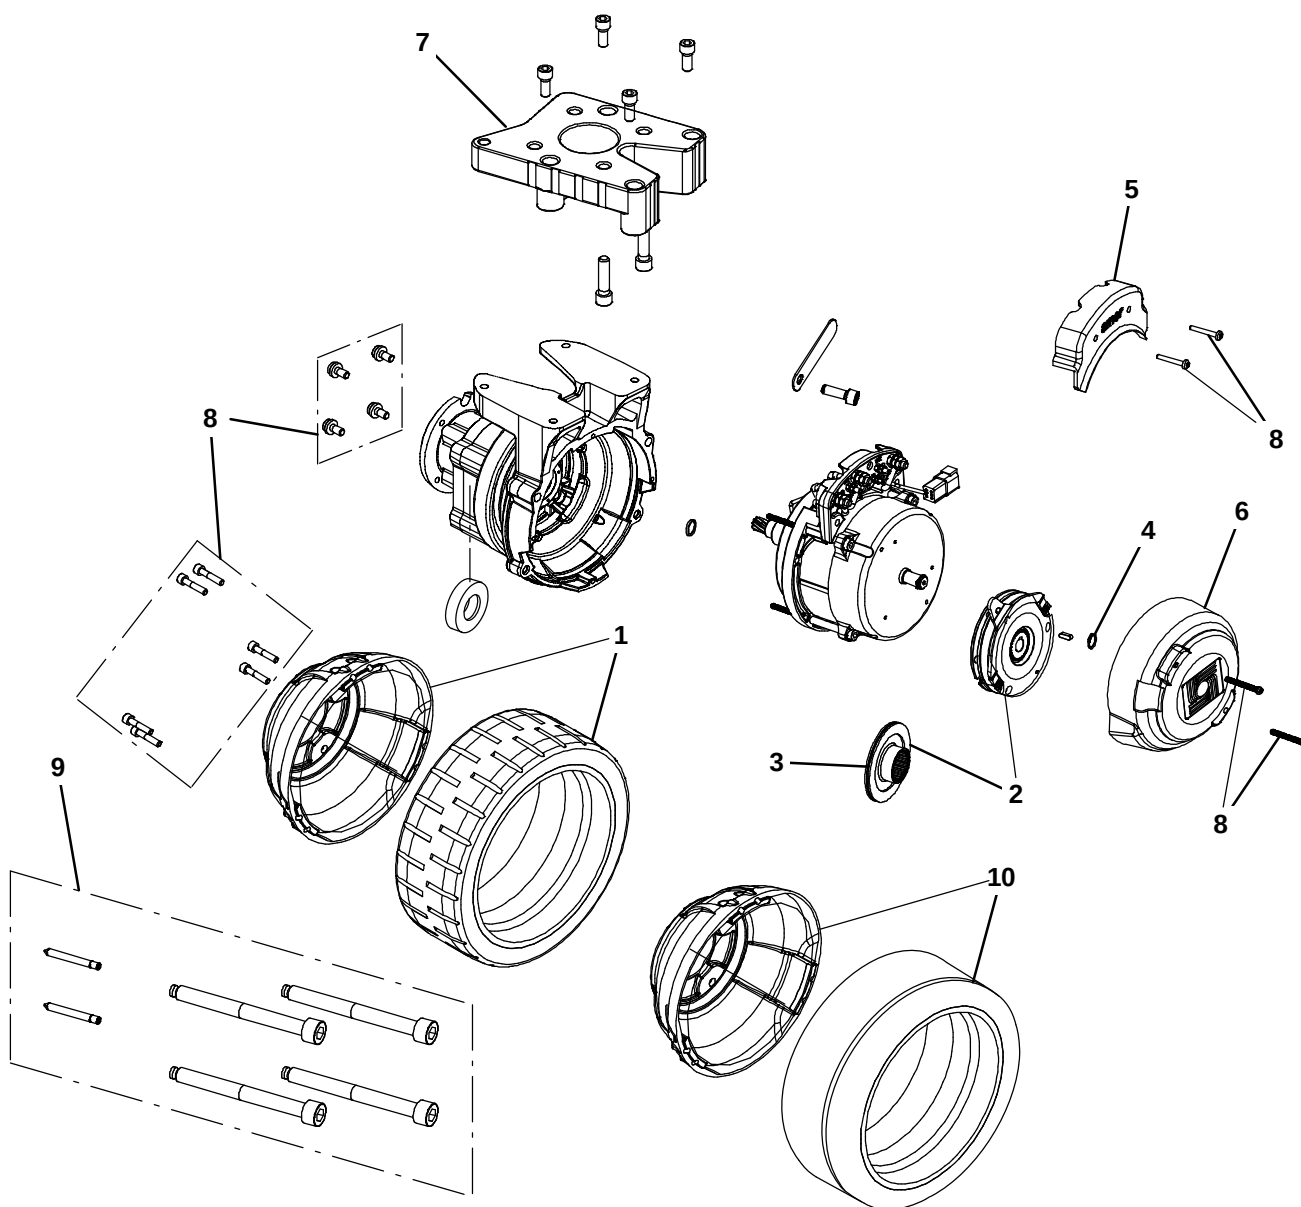

356940


Ref.	Part No.	Serial Number	Description	Qty.
▽	1255933	(11025472-19999999)	Wheel, Drive, Ac	1
▲	1	9020686	(11025472-19999999) Wheel And Hub Kit, Red [T12]	1
▲▽	2	9020688	(11025472-19999999) Brake Kit, Complt [T12/T16]	1
▲▲	3	9020689	(11025472-19999999) Brake Kit, Rotor [T12/T16]	1
▲	4	9008556	(11025472-19999999) Ring, Retaining F/1055257	1
▲	5	9008550	(11025472-19999999) Cover, Box, Connector	1
▲	6	9013901	(11025472-19999999) Cover, Motor, Drive	1
▲	7	9008552	(11025472-19999999) Spacer, Alm	1
▲	8	9020658	(11025472-19999999) Screw Kit	1
▲	9	9008544	(11025472-19999999) Tire Kit, Puller	1
	10	9020685	(11025472-19999999) Wheel And Hub Kit, Blue [T12]	1

Fig. 6 – Electric Motor Breakdown, 1053342

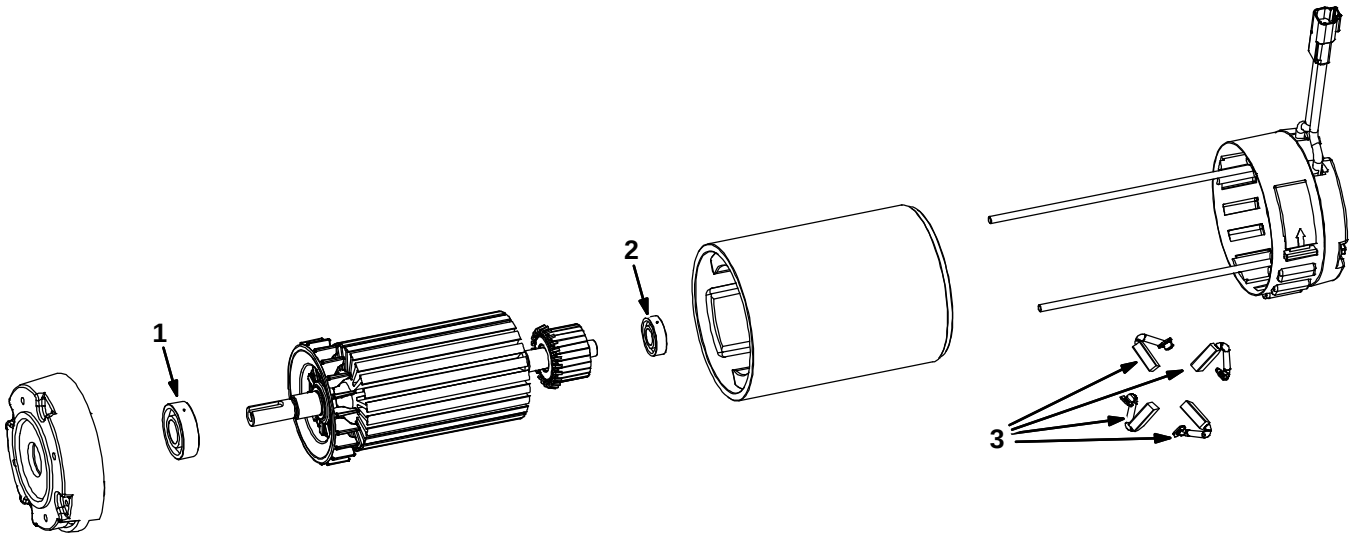

Ref.	Part No.	Serial Number	Description	Qty.
▽	1053342	(10000000–19999999)	Motor, ele, 36Vdc 1750rpm 1.00hp 22.0a	1
▲ 1	9013931	(10000000–19999999)	Bearing, Motor, Ele	2
▲ 2	9013934	(10000000–19999999)	Bearing, Motor, Ele	2
▲ 3	9011916	(10000000–19999999)	Brush Kit, Motor	1

Fig. 7 – Accelerator and Brake Pedal Assembly Breakdown, 1200253

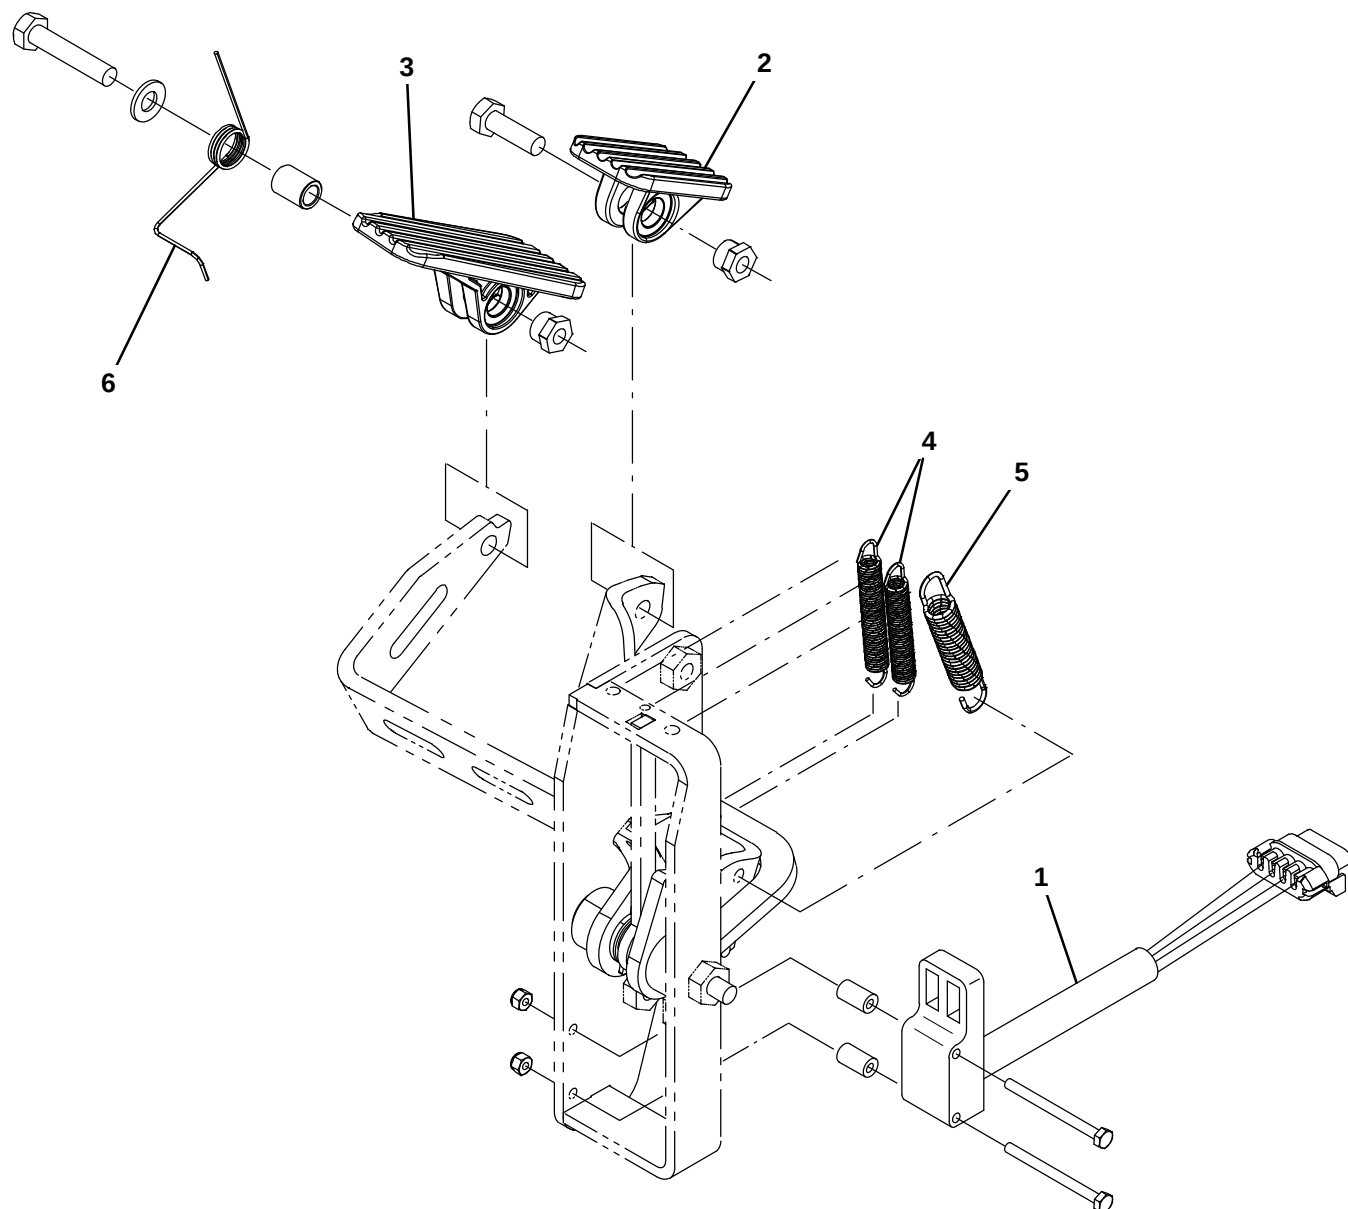

356189

Ref.	Part No.	Serial Number	Description	Qty.
▽	1200253	(10000000–19999999)	Pedal Assy, Accelerator, Brake	1
▲	1 1058687	(10000000–19999999)	Sensor, Position [Hall]	1
▲	2 1014548	(10000000–19999999)	Pedal, Brake, W/ Tread	1
▲	3 1051836	(10000000–19999999)	Pedal, Propel, W/ Tread	1
▲	4 1061049	(10000000–19999999)	Spring, Extn, 0.35od 0.05wir 02.8l	2
▲	5 1031716	(10000000–19999999)	Spring, Extn, 0.50od 0.07wir 03.0l	1
▲	6 1064665	(10000000–19999999)	Spring, Tors, 0.55id .05wir 04.0coil	1

